

Disconnect the electrical connectors.



REMOVAL AND INSTALLATION > FRONT SEAT CLIMATE CONTROL MODULE [SCME] > INSTALLATION

1.

To install, reverse the removal procedure.

2.



NOTE: This step is only necessary when installing a new component.

Using a diagnostic scan tool, complete the PMI process for the SCME following the on-screen instructions.


REMOVAL AND INSTALLATION > FRONT SEAT CONTROL SWITCH > REMOVAL



NOTE: Driver seat shown, passenger seat similar.


1.

If equipped, remove the clip and the recline handle.

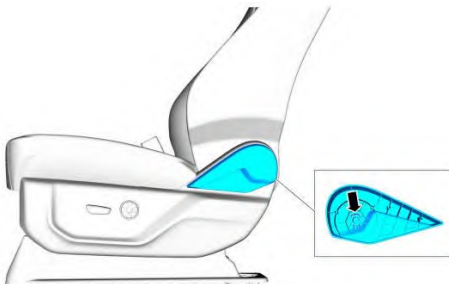

2.

Remove the side shield screws.

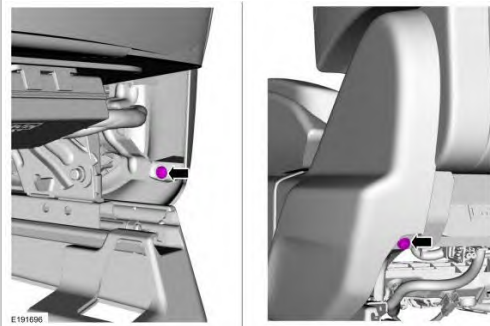

3.

 **NOTE:** Side shield with power recline seat shown, all others similar.

Remove the side shield.

1.


Lift up on the rear of the side shield and pull outward.

2.

Push the side shield forward.

3.

Disconnect the electrical connector.

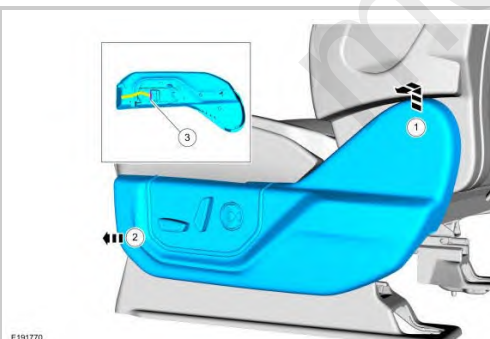

4.

Remove the seat control switch knob(s).