



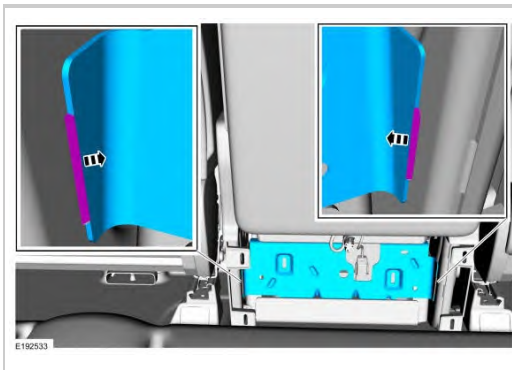

3.

Remove the retainers, disconnect the electrical connector and remove the center PATS antenna.

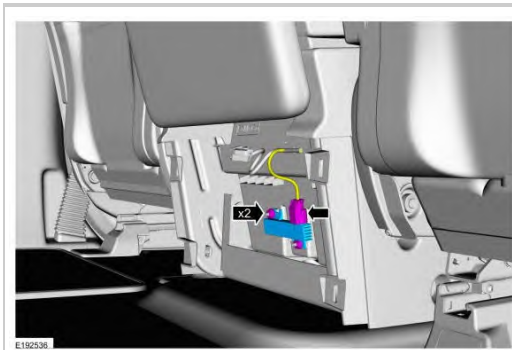

REMOVAL AND INSTALLATION > PASSIVE ANTI-THEFT SYSTEM (PATS) CENTER ANTENNA - VEHICLES WITH: COLUMN SHIFT > INSTALLATION

1.

To install, reverse the removal procedure.

REMOVAL AND INSTALLATION > PASSIVE ANTI-THEFT SYSTEM (PATS) CENTER ANTENNA - VEHICLES WITH: FLOOR SHIFT > REMOVAL

1.

Remove the floor console. REFER to: Floor Console .

2.

Remove the retainers, detach the wire harness pin-type retainer, and remove the floor console air duct.