

REMOVAL AND INSTALLATION > ROOF OPENING PANEL FRAME > REMOVAL



NOTE: Removal steps in this procedure may contain installation details.

1.



NOTE: The air deflector must be installed with the roof opening panel in the open position.

If replacing the roof opening panel frame, remove the air deflector. REFER to: Air Deflector .

2.

Remove the roof opening panel glass. REFER to: Roof Opening Panel Glass .

3.

Fully open the roof opening panel shield.

4.


Remove the headliner. REFER to: Headliner - SuperCrew .

5.

Remove both side curtain airbags. REFER to: Side Curtain Airbag - SuperCrew .


6.

Disconnect the antenna electrical connector and detach the pin-type retainer.

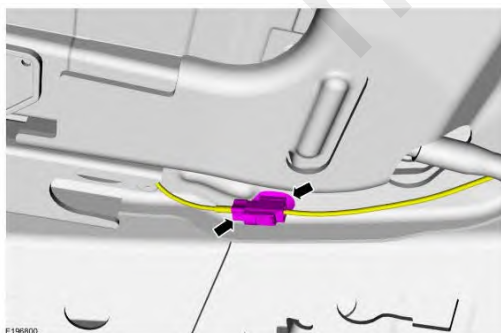

7.

Disconnect the front drain tubes.

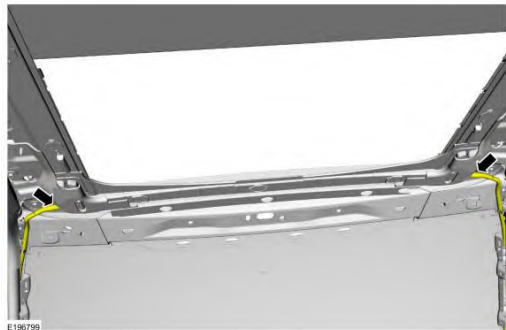

8.

Remove the bolts, detach the pin-type retainers and remove the front beam.


Torque

: 106 lb.in (12 Nm)



9.

Disconnect the rear drain tubes and the roof opening panel motor electrical connectors.

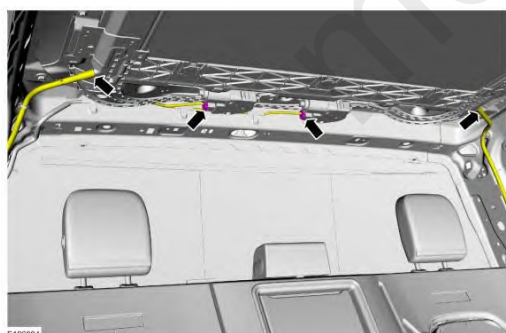

10.

Fold the rear seat cushions upward.