




4.

Install the interior rear view mirror. Refer to: Interior Rear View Mirror .

REMOVAL AND INSTALLATION > REAR DOOR GLASS RUN AND BRACKET - SUPERCAB, VEHICLES WITH: REAR POWER WINDOWS > REMOVAL

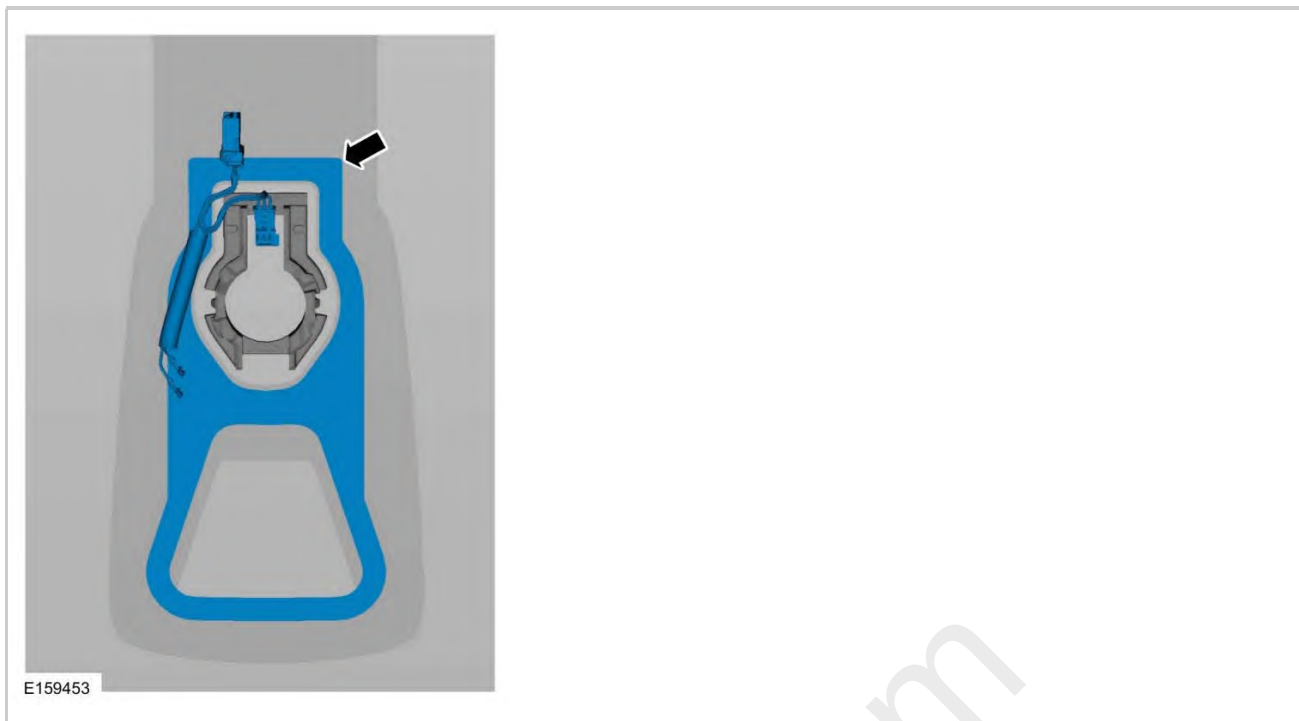

NOTE: LH side shown, RH side similar.



NOTE: Removal steps in this procedure may contain installation details.


Aft rear door glass run and bracket

1.

Remove the rear door trim panel. Refer to: Rear Door Trim Panel - SuperCab .

2.

Remove the watershield.

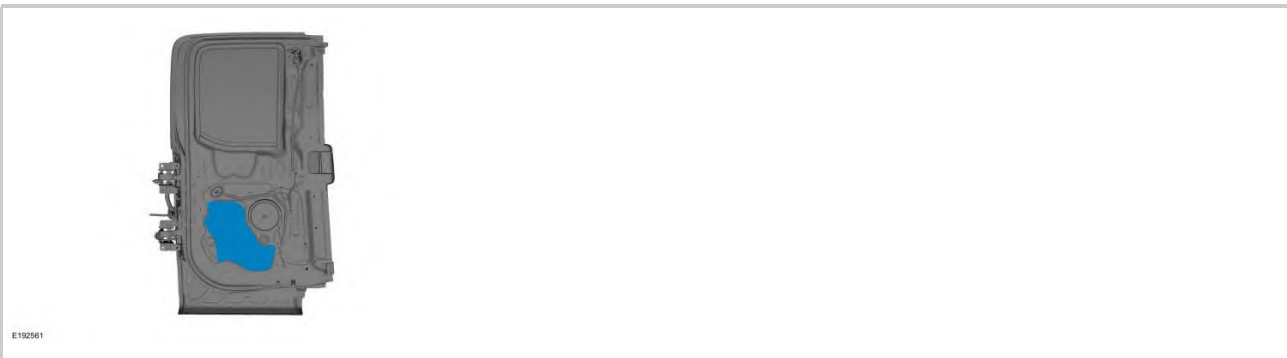

3.

Remove the aft rear door glass run and bracket.

Torque

: 93 lb.in (10.5 Nm)




Fore rear door glass run and bracket

4.

Remove the rear door trim panel. Refer to: Rear Door Trim Panel - SuperCab .

5.

Remove the watershield.

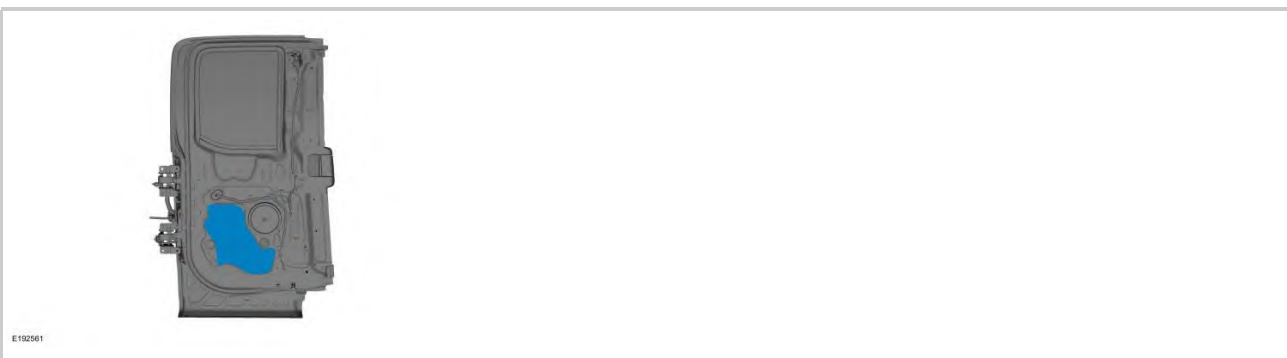

6.

Remove the rear door speaker.

Torque