


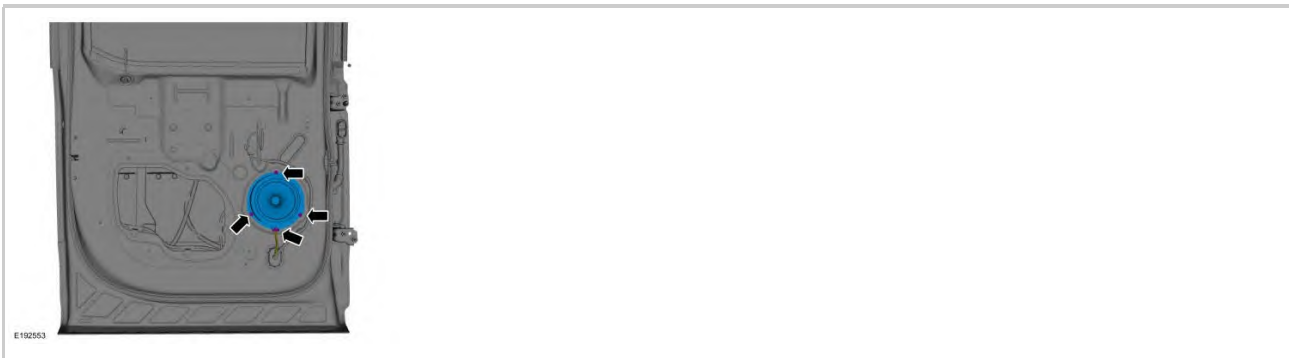

5.

Remove the fore rear door glass run and bracket.

1.

Remove the fore rear door glass run and bracket bolts.

Torque

: 93 lb.in (10.5 Nm)

2.

Remove the fore rear door glass run and bracket.



REMOVAL AND INSTALLATION > REAR DOOR GLASS RUN AND BRACKET - SUPERCREW > INSTALLATION

1.

To install, reverse the removal procedure.

REMOVAL AND INSTALLATION > REAR DOOR GLASS TOP RUN - SUPERCREW > REMOVAL



NOTE: LH side shown, RH side similar.