


: 22 lb.ft (30 Nm)

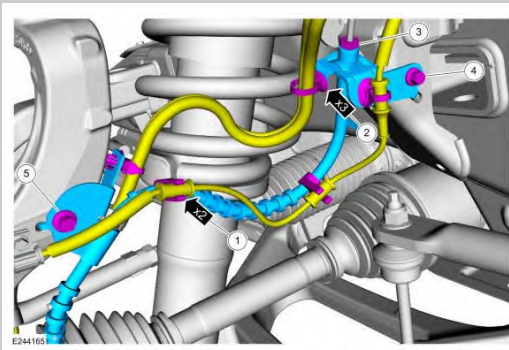

REMOVAL AND INSTALLATION > FRONT BRAKE FLEXIBLE HOSE > INSTALLATION

1.

To install, reverse the removal procedure.

2.

Bleed the brake system. Refer to: BRAKE SYSTEM PRESSURE BLEEDING .