

To install, reverse the removal procedure.


REMOVAL AND INSTALLATION > PARKING BRAKE WARNING INDICATOR SWITCH > REMOVAL



NOTE: Removal steps in this procedure may contain installation details.

1.

Disconnect the parking brake indicator switch electrical connector.

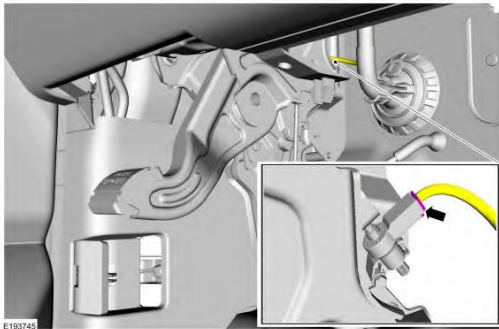


2.

Remove the 2 bolts, loosen the remaining bolt 2 full turns and position the parking brake control aside.

Torque

: 177 lb.in (20 Nm)

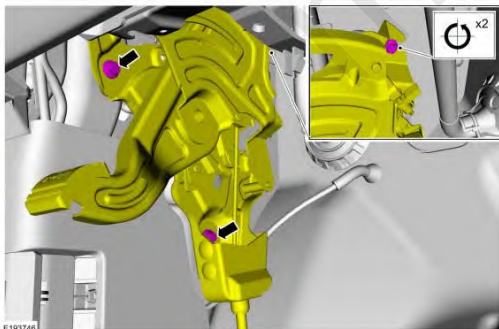

3.

Remove the bolt and the parking brake indicator switch.

Torque

: 18 lb.in (2 Nm)