


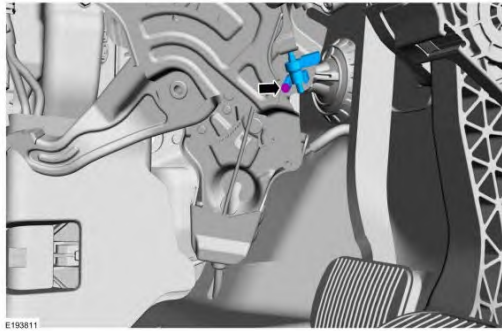

REMOVAL AND INSTALLATION > PARKING BRAKE WARNING INDICATOR SWITCH > INSTALLATION

1.

To install, reverse the removal procedure.

REMOVAL AND INSTALLATION > PARKING BRAKE SHOES

Materials

Name	Specification
Silicone Brake Caliper Grease and Dielectric Compound XG-3-A	ESE-M1C171-A

REMOVAL AND INSTALLATION > PARKING BRAKE SHOES > REMOVAL



NOTE: Axle shaft removed from illustrations for clarity.

1.

Remove the brake disc. Refer to Brake Disc .


2.

1.

Remove the spring.


2.

Remove the parking brake shoe adjuster.

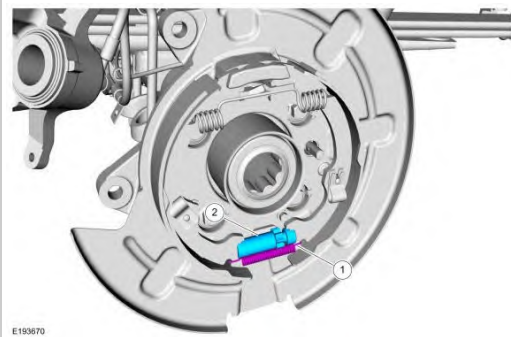


3.

Remove the 2 parking brake shoe hold down springs and pins.

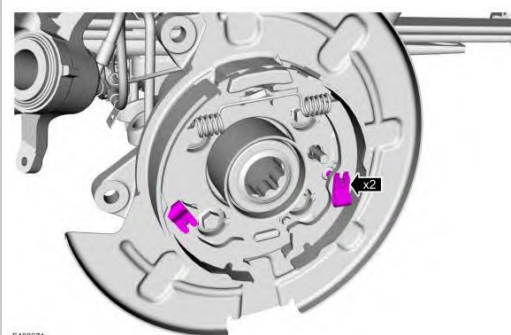

4.

Remove the spring and the parking brake shoes.

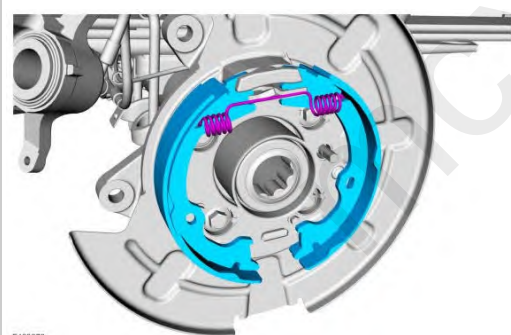

5.

Using specified grease, lubricate the parking brake shoe, actuator lever and the support bracket contact points.

Material

: Silicone Brake Caliper Grease and Dielectric Compound / XG-3-A (ESE-M1C171-A)