


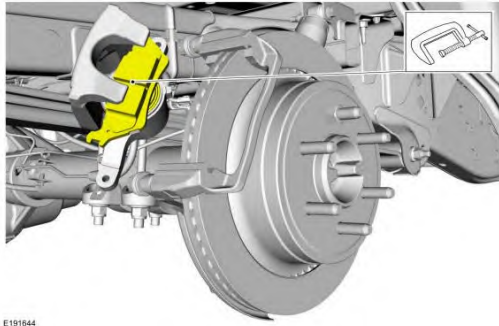

REMOVAL AND INSTALLATION > BRAKE PADS - VEHICLES WITHOUT: ELECTRONIC PARKING BRAKE (EPB) > INSTALLATION

1.

 **NOTE:** Make sure that the brake hose is not twisted when installing the brake caliper or damage to the brake flexible hose may occur.

 **NOTE:** If installing new brake pads, make sure to install all new hardware and lubricant supplied with the brake pad kit. Refer to the brake pad instruction sheet when applying lubricant.

To install, reverse the removal procedure.

2.

Depress the brake pedal, check the brake fluid level in the brake fluid reservoir and top up as necessary with brake fluid. Refer to: Specifications .

REMOVAL AND INSTALLATION > REAR BRAKE INNER FLEXIBLE HOSE > REMOVAL

 **NOTE:** Removal steps in this procedure may contain installation details.

1.

1.

Disconnect the 2 wheel speed sensor electrical connectors and, if equipped, the EPB electrical connector.

2.