


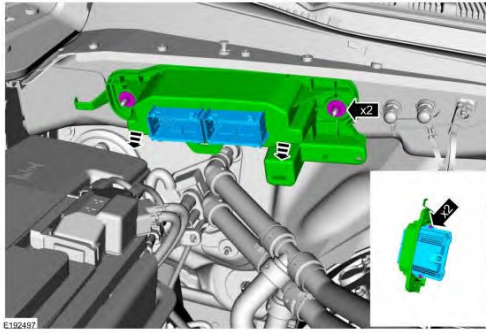

REMOVAL AND INSTALLATION > POWERTRAIN CONTROL MODULE (PCM) > INSTALLATION

1.

To install, reverse the removal procedure.

2.



NOTE: This step is only necessary when installing a new component.

Upload the module information from the diagnostic tool using the Programmable Modules Installation routine. REFER to: Module Configuration - System Operation and Component Description .

3.

Carry out the Parameter Reset procedure. REFER to: ANTI-THEFT SECURITY ACCESS .

4.

Using the scan tool, perform the Misfire Monitor Neutral Profile Correction procedure, following the on-screen instructions.

REMOVAL AND INSTALLATION > TURBOCHARGER BOOST PRESSURE (TCBP) AND CHARGER AIR COOLER TEMPERATURE (CACT) SENSOR > REMOVAL



NOTE: Removal steps in this procedure may contain installation details.

1.

Disconnect the electrical connector, remove the retainers and the turbocharger boost pressure (TCBP) and charge air cooler temperature (CACT) sensor.