


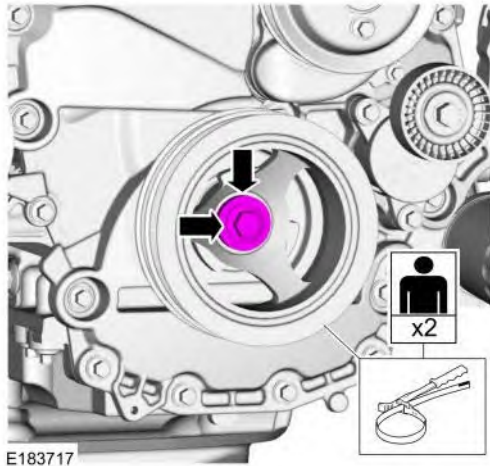

6.

Install the A/C compressor belt. Refer to: AIR CONDITIONING (A/C) COMPRESSOR BELT .

7.

After completing the repairs, perform the Misfire Monitor Neutral Profile Correction procedure using a diagnostic scan tool.

REMOVAL AND INSTALLATION > CRANKSHAFT REAR SEAL

Special Tool(s) / General Equipment

Plastic Scraper

Materials

Name	Specification
Motorcraft ® SAE 5W-30 Premium Synthetic Blend Motor Oil XO-5W30-QSP	WSS-M2C946-A
Motorcraft ® High Performance Engine RTV Silicone TA-357	WSE-M4G323-A6
Motorcraft ® Silicone Gasket Remover ZC-30-A	-
Motorcraft ® Metal Surface Prep ZC-31-A	-
Metal Brake Parts Cleaner PM-4-A, PM-4-B	-

REMOVAL AND INSTALLATION > CRANKSHAFT REAR SEAL > REMOVAL



NOTE: During engine repair procedures, cleanliness is extremely important. Any foreign