


Fig 1: LH Exhaust Manifold Bolts Tightening Sequence

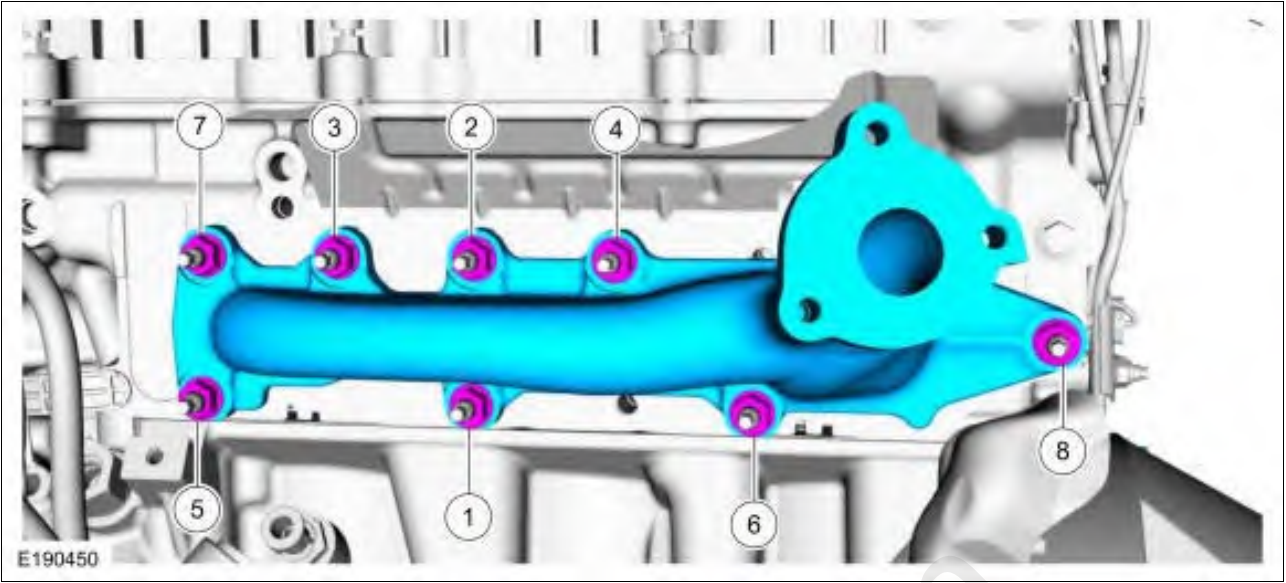

Courtesy of FORD MOTOR CO.

- 3.  
Install the LH turbocharger. Refer to: Turbocharger LH .

REMOVAL AND INSTALLATION > EXHAUST MANIFOLD RH

Materials

| Name                                    | Specification |
|-----------------------------------------|---------------|
| Motorcraft ® Metal Surface Prep ZC-31-B | -             |

REMOVAL AND INSTALLATION > EXHAUST MANIFOLD RH > REMOVAL

- 1.  
With the vehicle in NEUTRAL, position it on a hoist. Refer to: Jacking and Lifting - Overview .
- 2.  
Remove the RH turbocharger. Refer to: Turbocharger RH .
- 3.  
  
Remove and discard the nuts.  
  
Remove the exhaust manifold.