


: 22 lb.ft (30 Nm)

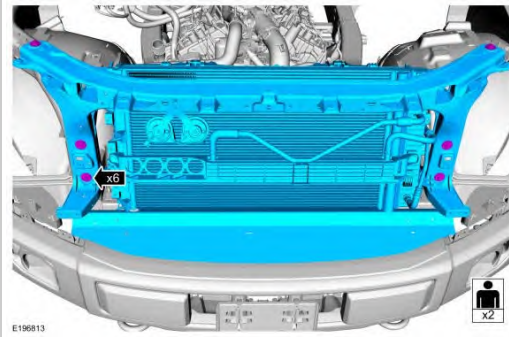

REMOVAL AND INSTALLATION > COOLING MODULE > INSTALLATION

1.

To install, reverse the removal procedure.

2.



NOTE: Only use the specified material to lubricate the seals.

Install new condenser fitting O-ring seals.

Material

: Motorcraft® PAG Refrigerant Compressor Oil / YN-12-D (WSH-M1C231-B)

3.

Fill and bleed the cooling system. REFER to: Cooling System Draining and Vacuum Filling .

4.

Check and fill the transmission fluid. REFER to: Transmission Fluid Level Check .

REMOVAL AND INSTALLATION > CYLINDER HEAD TO COOLANT OUTLET CONNECTOR HOSE ASSEMBLY

Special Tool(s) / General Equipment

Hose Clamp Remover/Installer

REMOVAL AND INSTALLATION > CYLINDER HEAD TO COOLANT OUTLET