


Remove the screw and position the HVAC duct slightly down.

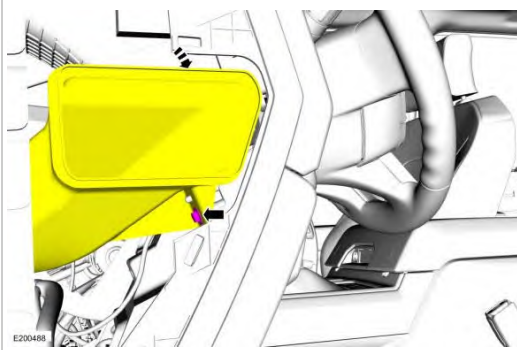

3.


 **NOTE:** The telematics modem mounting bracket flange aligns into the matching instrument panel channel.

Remove the bolt and the telematics modem.

Disconnect the electrical connector.

Torque

: 18 lb.ft (25 Nm)

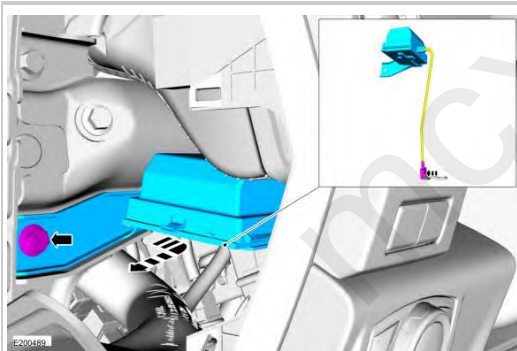

REMOVAL AND INSTALLATION > TELEMATICS MODEM > INSTALLATION

1.

To install, reverse the removal procedure.

2.

Initialize telematics modem.

1.