

1.

To install, reverse the removal procedure.

REMOVAL AND INSTALLATION > SATELLITE RADIO ANTENNA > REMOVAL



NOTE: Removal steps in this procedure may contain installation details.

1.

Lower the headliner. Refer to: Headliner - Lowering - Regular Cab . Refer to: Headliner - Lowering - SuperCab . Refer to: Headliner - Lowering - SuperCrew .

2.

1.

Disconnect the electrical connector.

2.

Remove the satellite radio antenna bolt.

Torque


: 62 lb.in (7 Nm)

3.

Remove the satellite radio antenna retainer.

4.

Remove the satellite radio antenna from the roof.

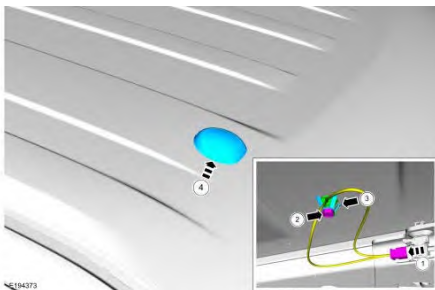

REMOVAL AND INSTALLATION > SATELLITE RADIO ANTENNA > INSTALLATION

Existing antenna