



REMOVAL AND INSTALLATION > SATELLITE RADIO ANTENNA > INSTALLATION

Existing antenna

1.

To install, reverse the removal procedure.

New antenna

2.



NOTE: If installing a new satellite radio antenna it is not necessary to remove the bolt from the satellite radio antenna base.

Install the satellite radio harness through the roof open and push the base down until fully seated.



REMOVAL AND INSTALLATION > SATELLITE RADIO ANTENNA CABLE > REMOVAL

Upper satellite radio antenna cable


1.

Lower the headliner. Refer to: Headliner - Lowering - Regular Cab . Refer to: Headliner - Lowering - SuperCab . Refer to: Headliner - Lowering - SuperCrew .

2.


Disconnect the electrical connector, release the retainers and position aside the upper satellite

radio antenna cable following the routing shown below.

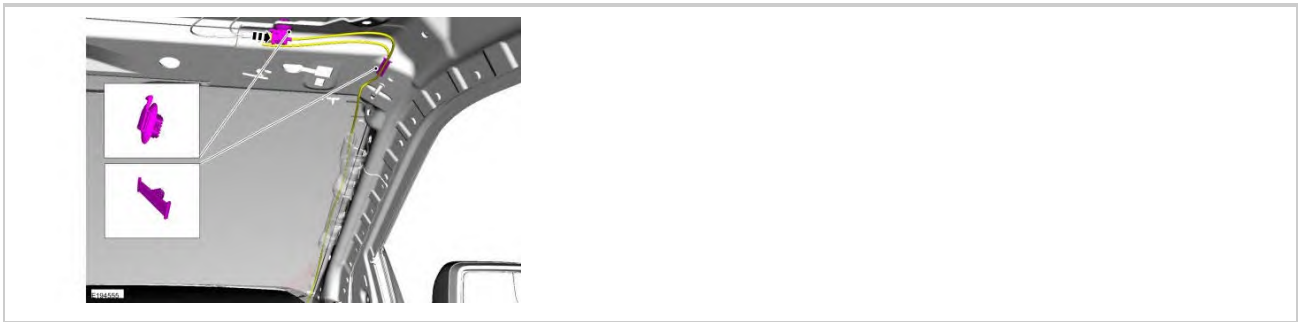

3.

Fully lower the glove compartment.

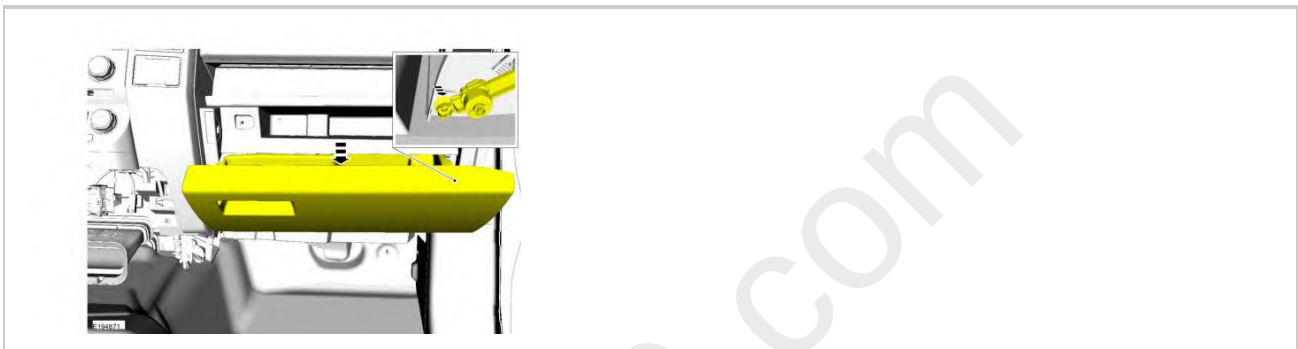

4.

Disconnect the antenna cable, release the retainers and remove the upper satellite radio antenna cable following the routing shown below.



Lower satellite radio antenna cable

5.

Remove the ACM. Refer to: Audio Front Control Module (ACM) .

6.

Fully lower the glove compartment.