


7.

Disconnect the antenna cable, release the retainer and remove the lower satellite radio antenna cable following the routing shown below.

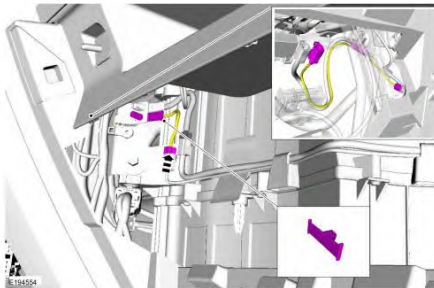

REMOVAL AND INSTALLATION > SATELLITE RADIO ANTENNA CABLE > INSTALLATION

1.


To install, reverse the removal procedure.

REMOVAL AND INSTALLATION > SUBWOOFER SPEAKER > REMOVAL

Sony® subwoofer

1.

Fold down the rear seat.

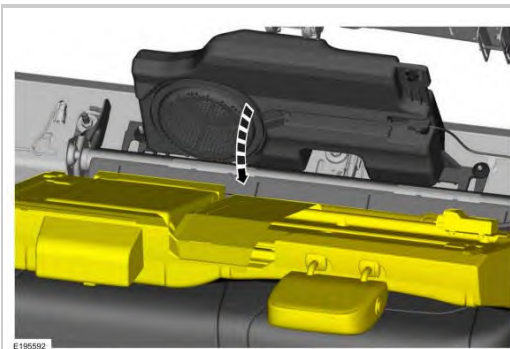

2.

1.

Disconnect the electrical connector.

2.

Remove the bolt.

Torque


: 62 lb.in (7 Nm)

3.

Remove the nuts and the subwoofer.

Torque

: 62 lb.in (7 Nm)

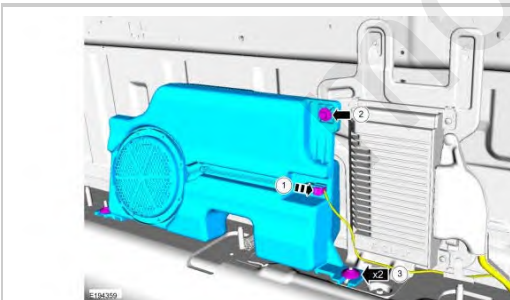

KICKER® subwoofer

3.

1.

Disconnect the electrical connector.

2.

Remove the bolts.