

Rear Door Trim Panel - SuperCab


Base Part Number: Base Part Number: 27406

Removal


NOTE: *LH side shown, RH side similar.*

NOTE: *Removal steps in this procedure may contain installation details.*

1. Remove the rear door upper trim panel.
 1. Remove the D-ring trim cover.
 2. Remove the safety belt D-ring bolt and position aside the safety belt.
Torque: 30 lb.ft (40 Nm)
 3. Release the clips and remove the rear door upper trim panel.

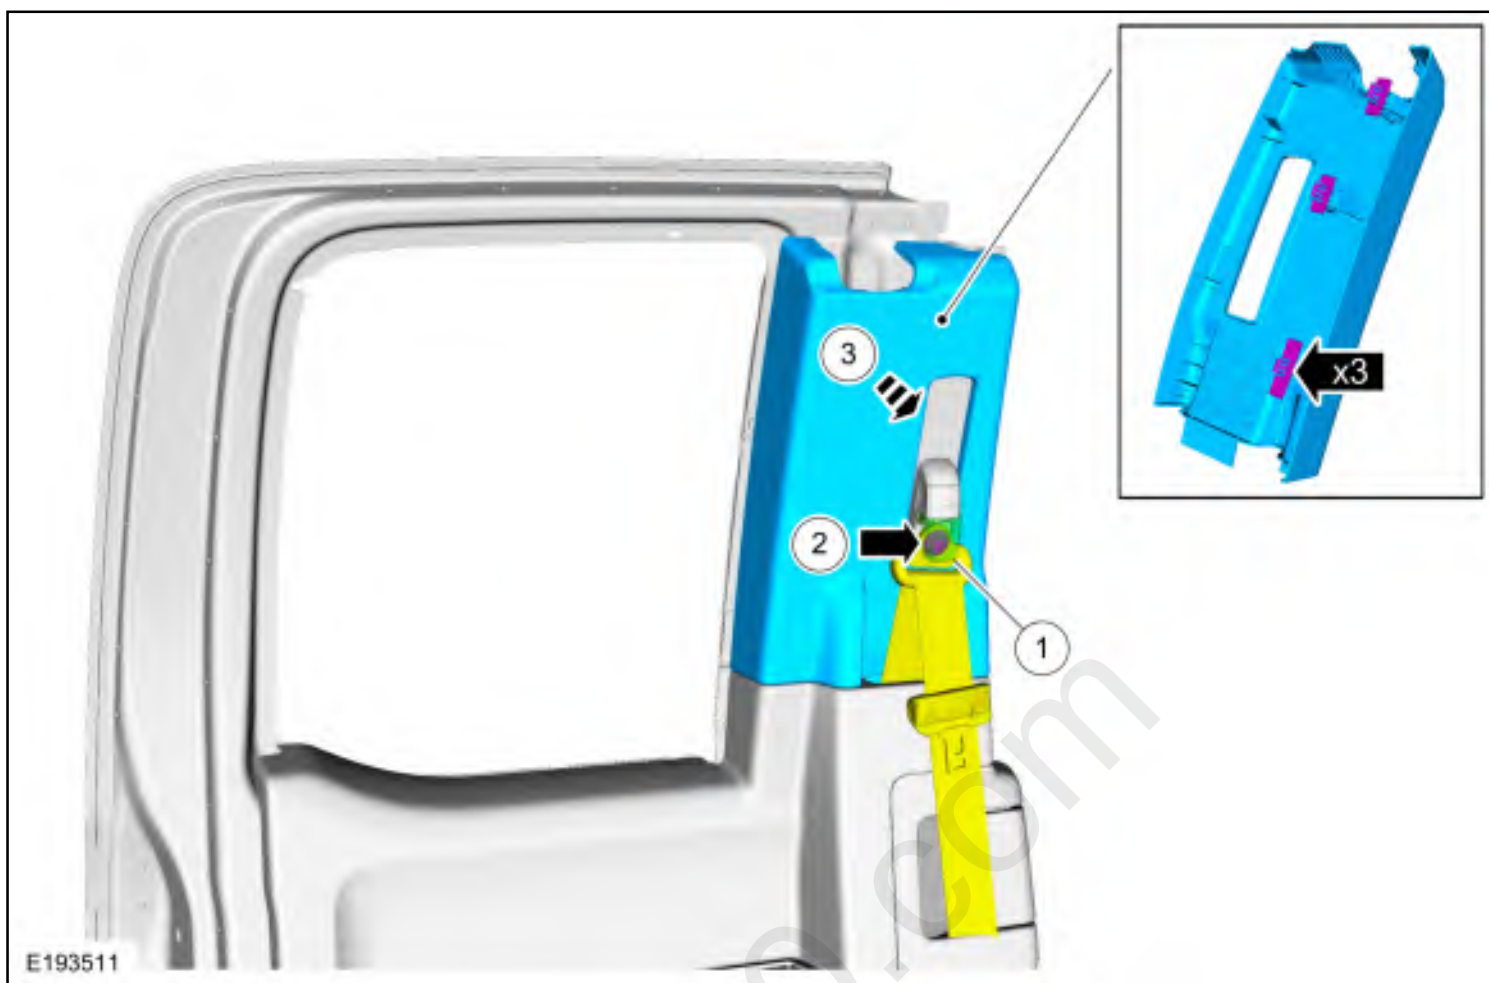


2. Remove the inside door handle cover.

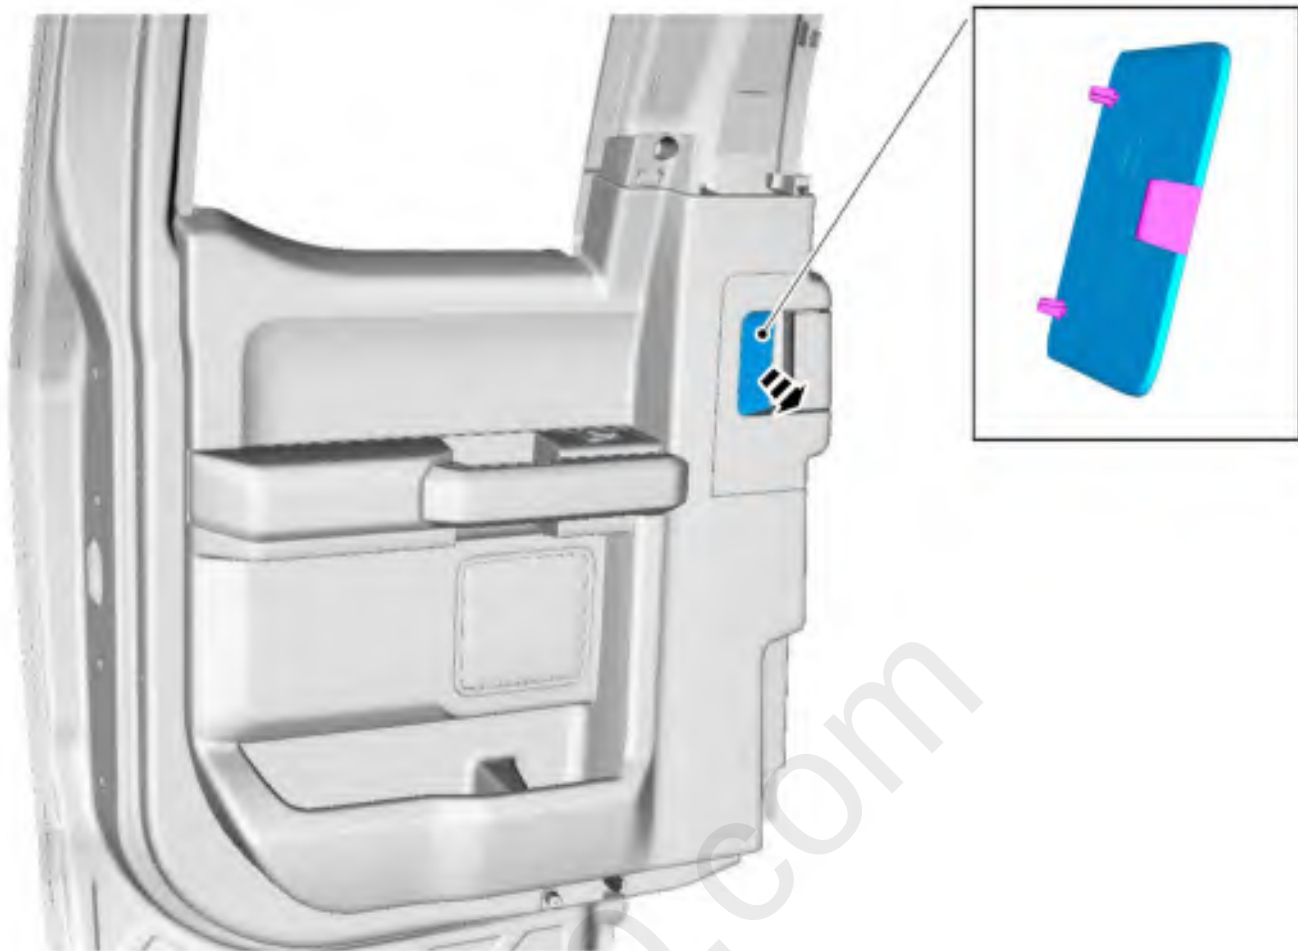

3. Remove the inside door handle retainers.



4. Release the clips and remove the door grab handle.

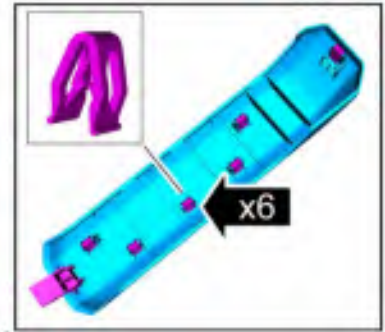

E195359

5. Remove the door trim panel bolts.






6. Remove the rear door trim panel lower retainers.



7. Remove the rear door lower trim panel.

1. Release the clips and detach the rear door lower trim panel.
2. Position aside the handle assembly. If equipped with manual windows, remove the rear door lower trim panel.
3. If equipped, disconnect the power window switch electrical connector and remove the rear door lower trim panel.

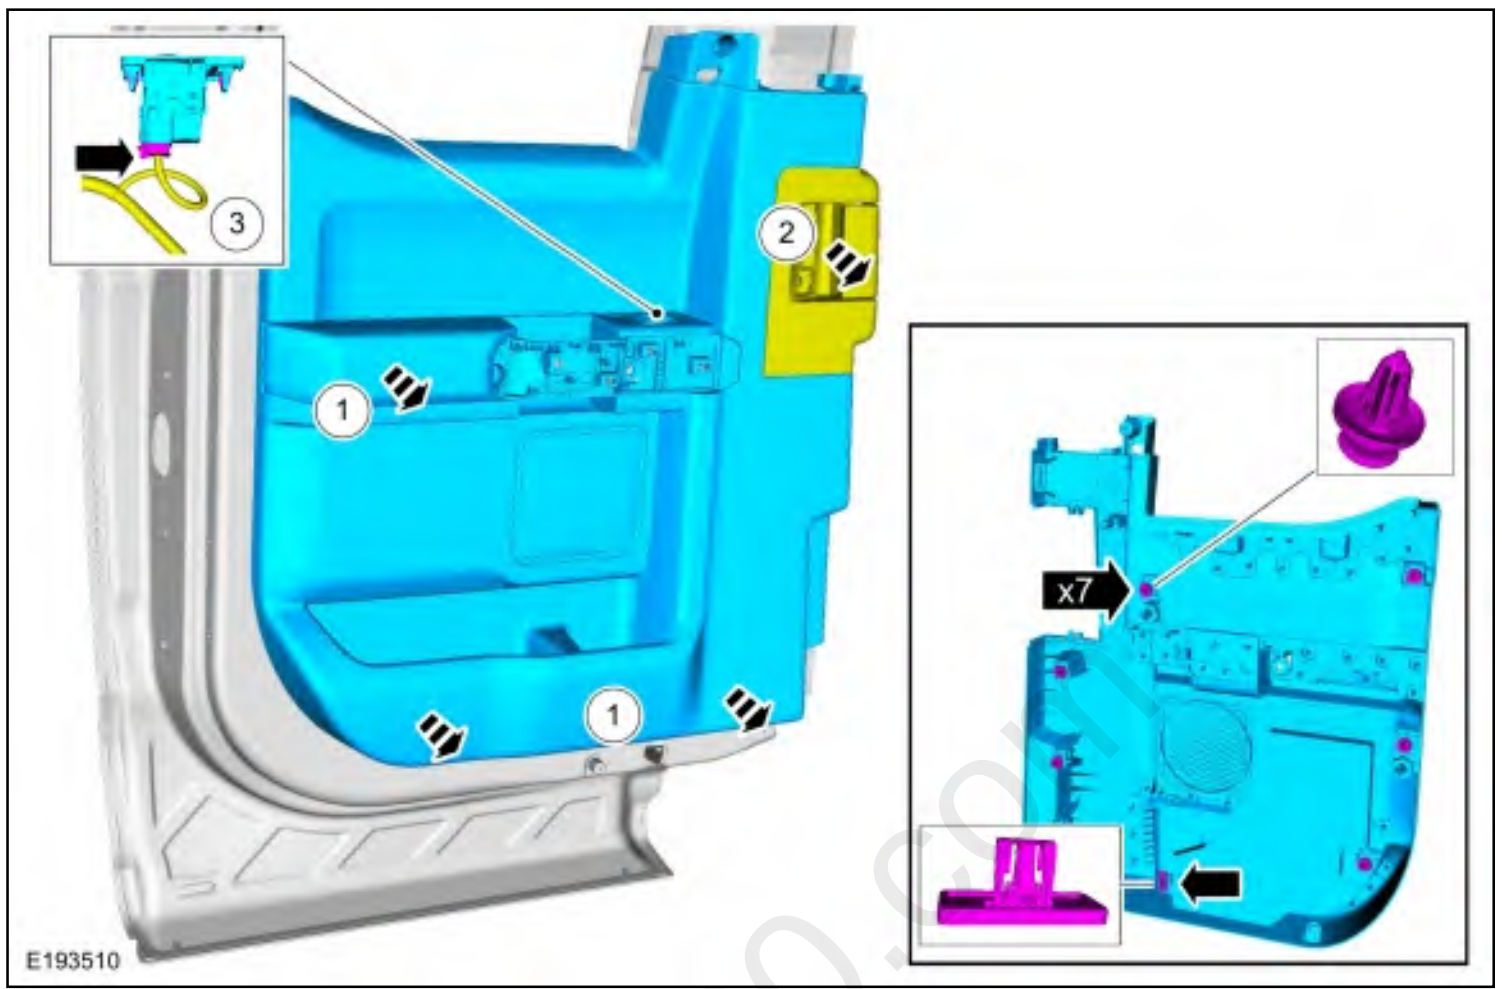

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company