

Pickup Bed Side Step

Removal


NOTE: Removal steps in this procedure may contain installation details.

NOTE: LH side shown, RH side similar.

1. With the vehicle in NEUTRAL, position it on a hoist.
Refer to: [Jacking and Lifting - Overview](#) (100-02 Jacking and Lifting, Description and Operation).
2. **NOTE:** *If equipped, SuperCrew 5.5 ft. styleside pickup box.*

Remove the 2 bolts and 2 nuts from the step assembly.

Torque: 30 lb.ft (41 Nm)

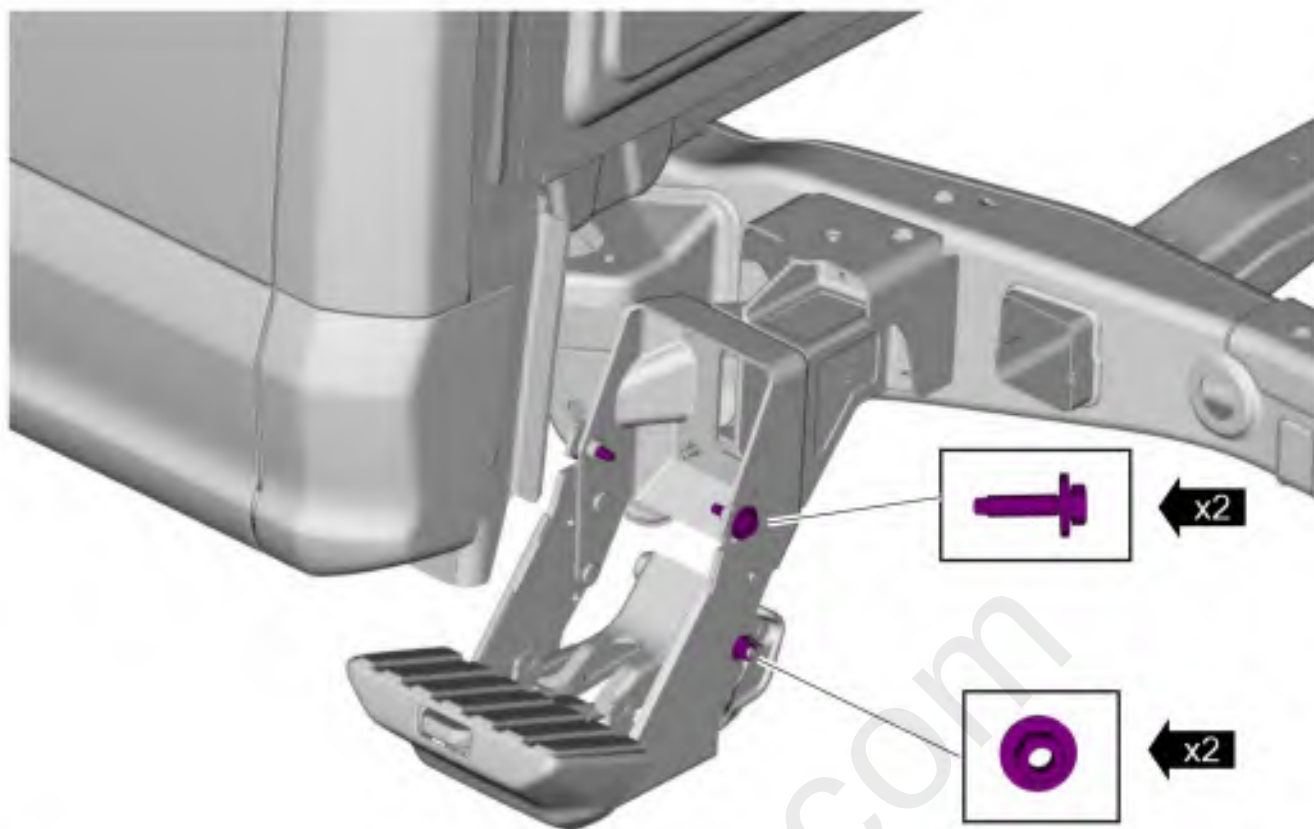

E193155


3. Remove the step assembly.



E193157



4. Remove the 3 bolts and remove the bracket assembly.
Torque: 30 lb.ft (41 Nm)

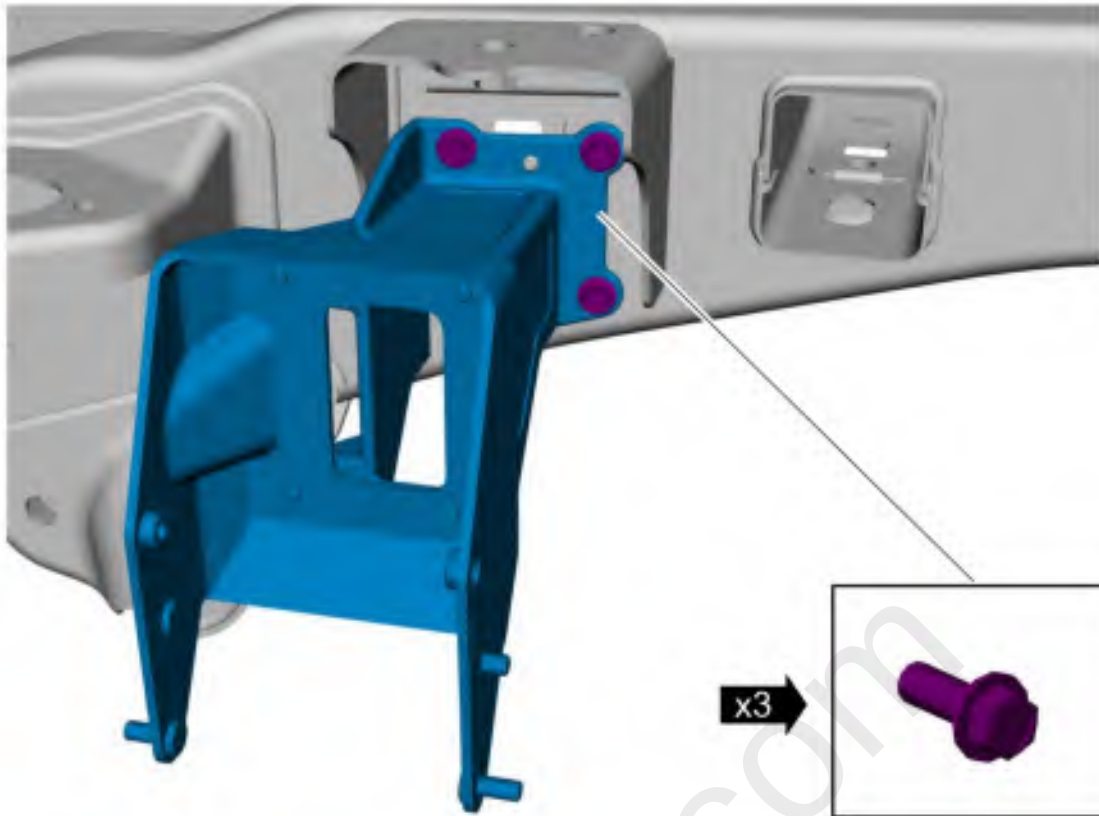


E193159

5. **NOTE:** *If equipped with 8.5 ft. or 6.5 ft. styleside pick up box.*


Remove the 2 bolts and 2 nuts from the step assembly

Torque: 30 lb.ft (41 Nm)

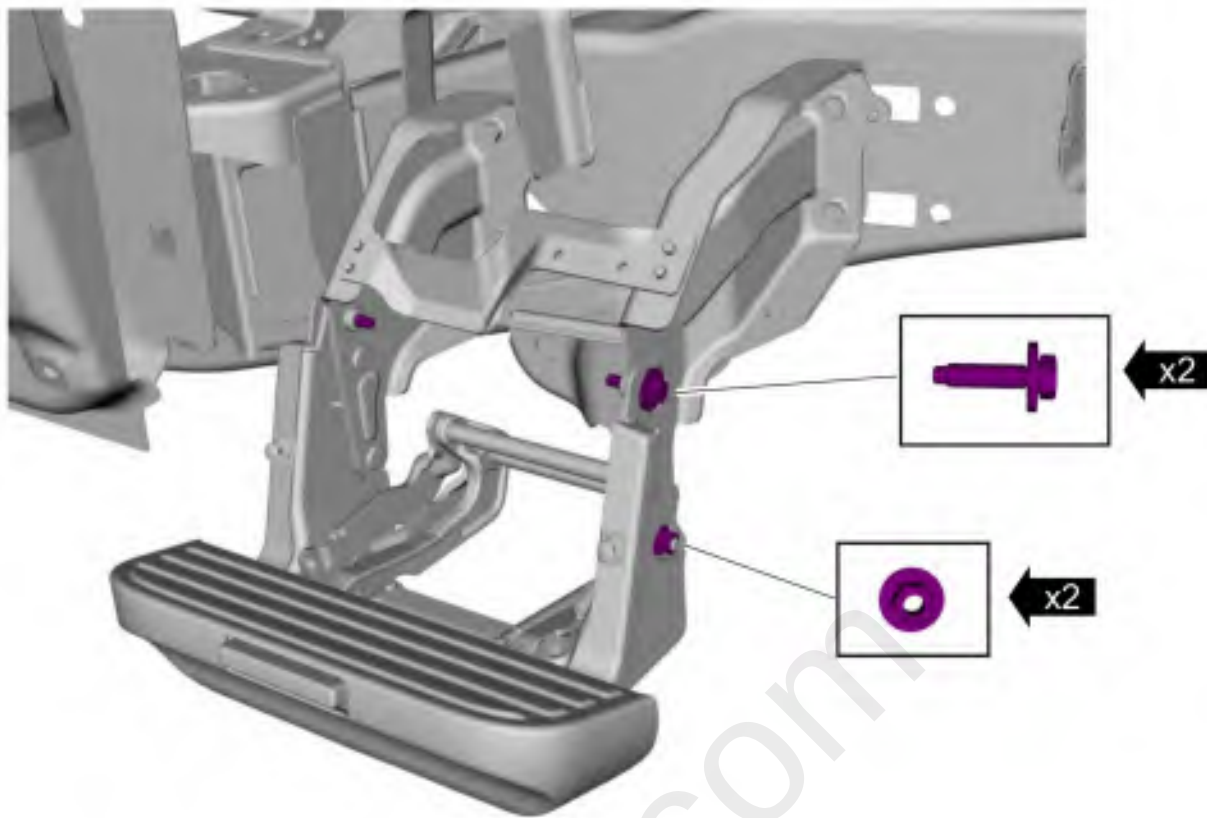

E193154


6. Remove the step assembly.

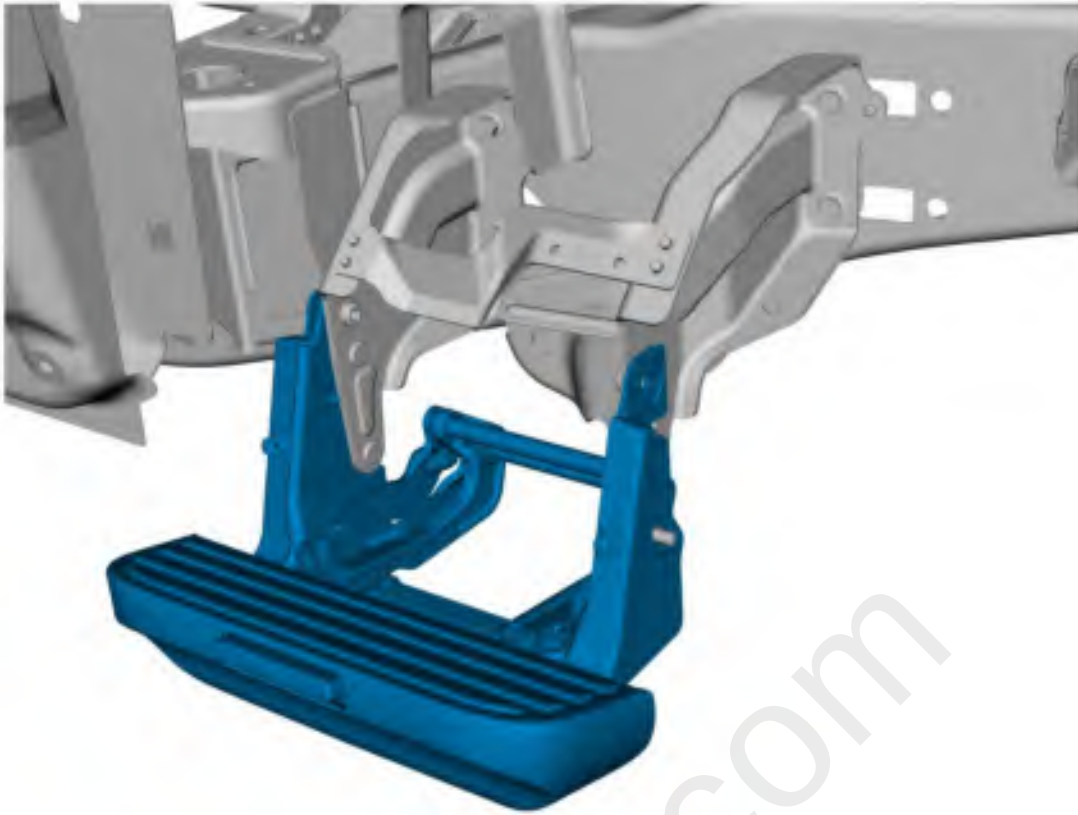

E193156



7. Remove the 4 bolts and remove the bracket assembly.
Torque: 30 lb.ft (41 Nm)

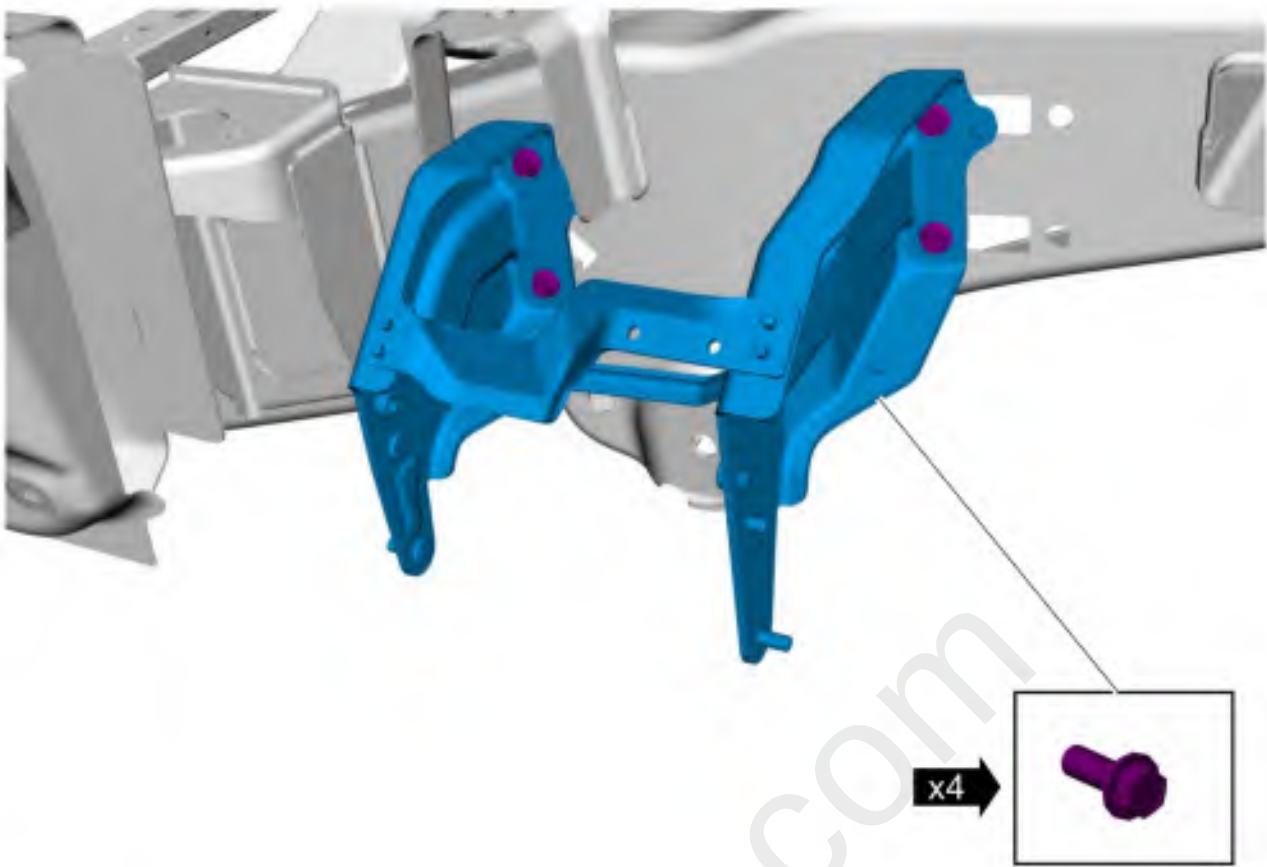

E193158



Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company