


# Front Seat Power Lumbar Assembly - Vehicles With: Multi-Contour Seats


## Removal

**NOTE:** *Driver seat shown, passenger seat similar.*


1. Remove the SCMG or SCMH.  
Refer to: Driver Multi-Contour Seat Module [SCMG] (501-10 Front Seats) .
2. Remove the front seat backrest blower motor.  
Refer to: Front Seat Backrest Blower Motor (501-10 Front Seats) .
3. Release the backrest wire harness from the power lumbar spring and position the wire harness aside.

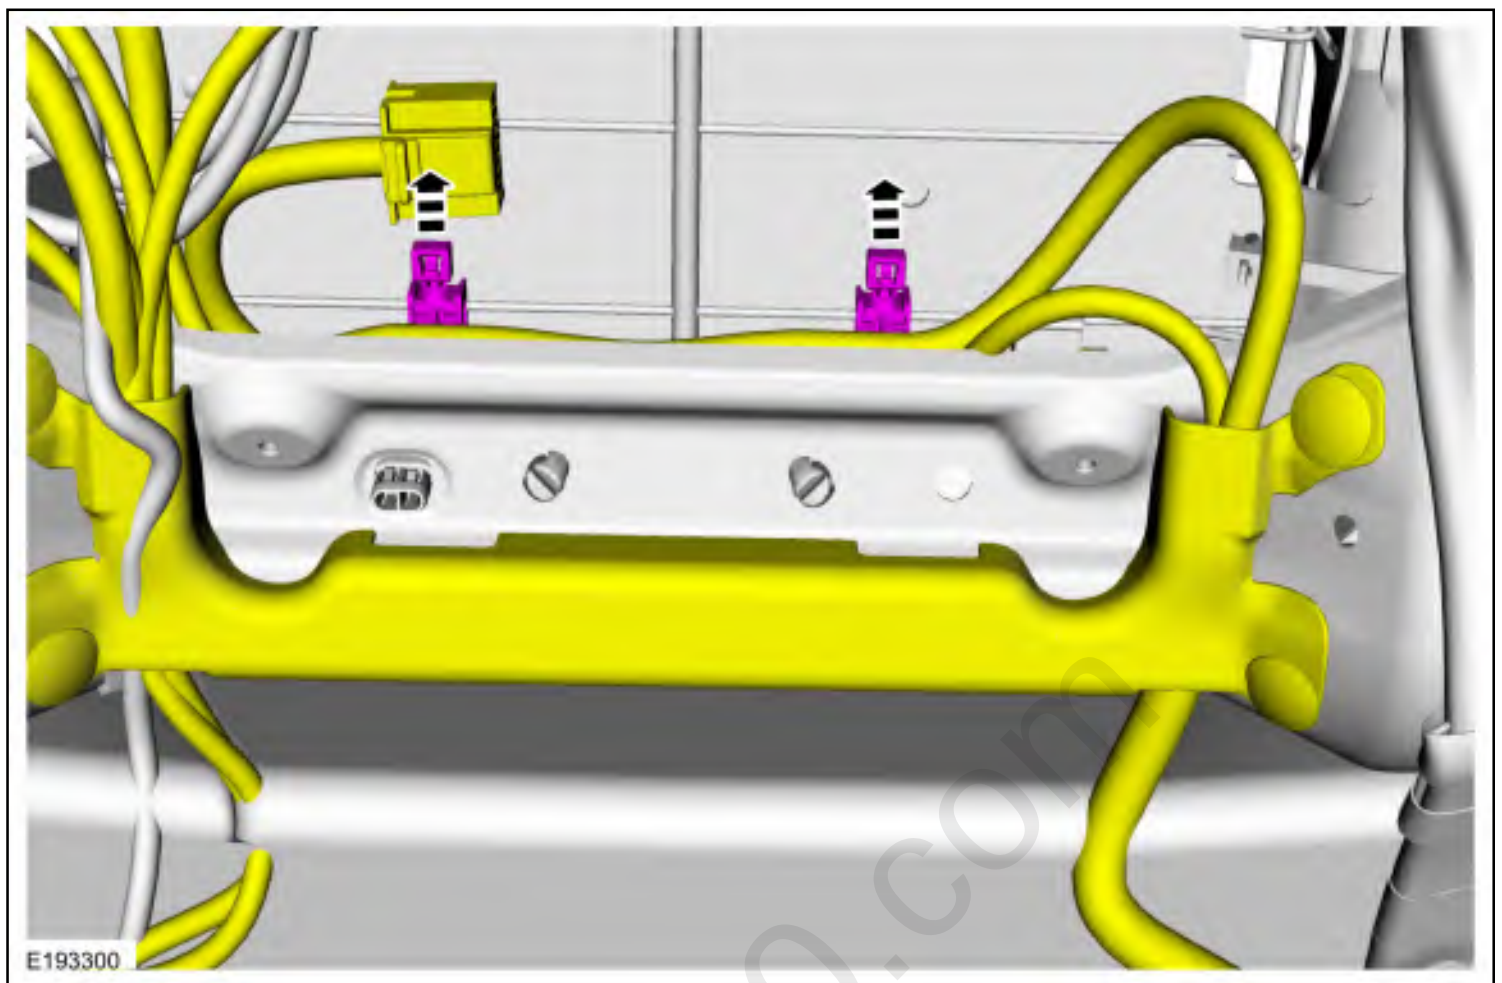

4. Disconnect the power lumbar pump electrical connector and release the connector from the power lumbar spring.

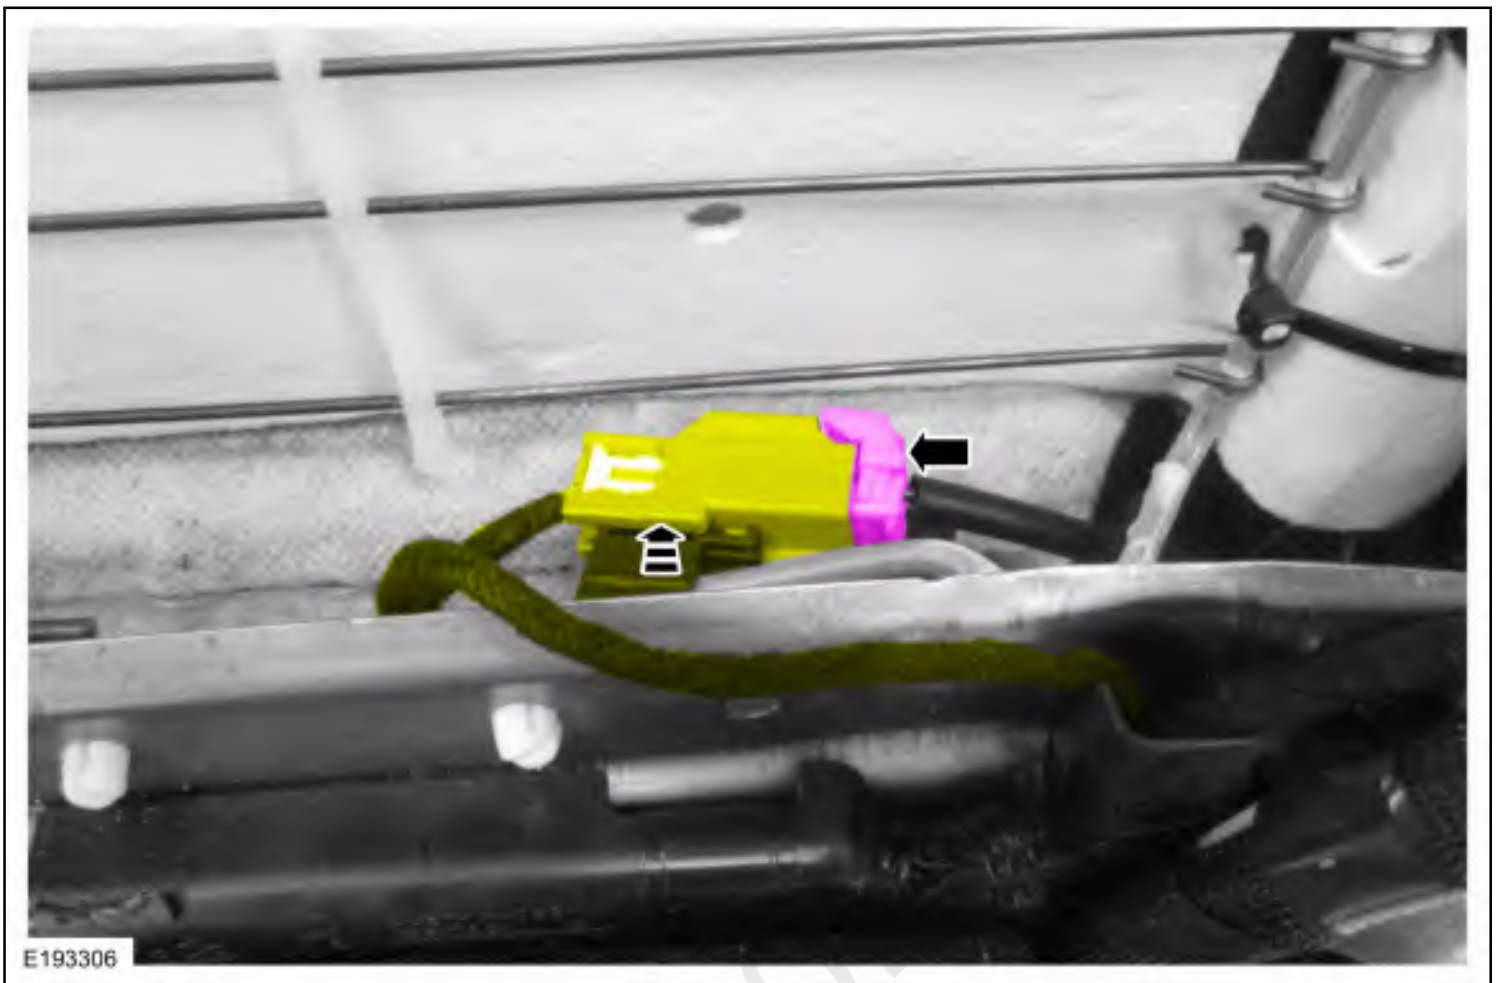

5. Remove the seat power lumbar assembly.
  1. Release the lower retainers.
  2. Position the backrest foam to access the seat power lumbar assembly pin-type retainer.
  3. Remove the pin-type retainer.
  4. Release the upper J-hooks.

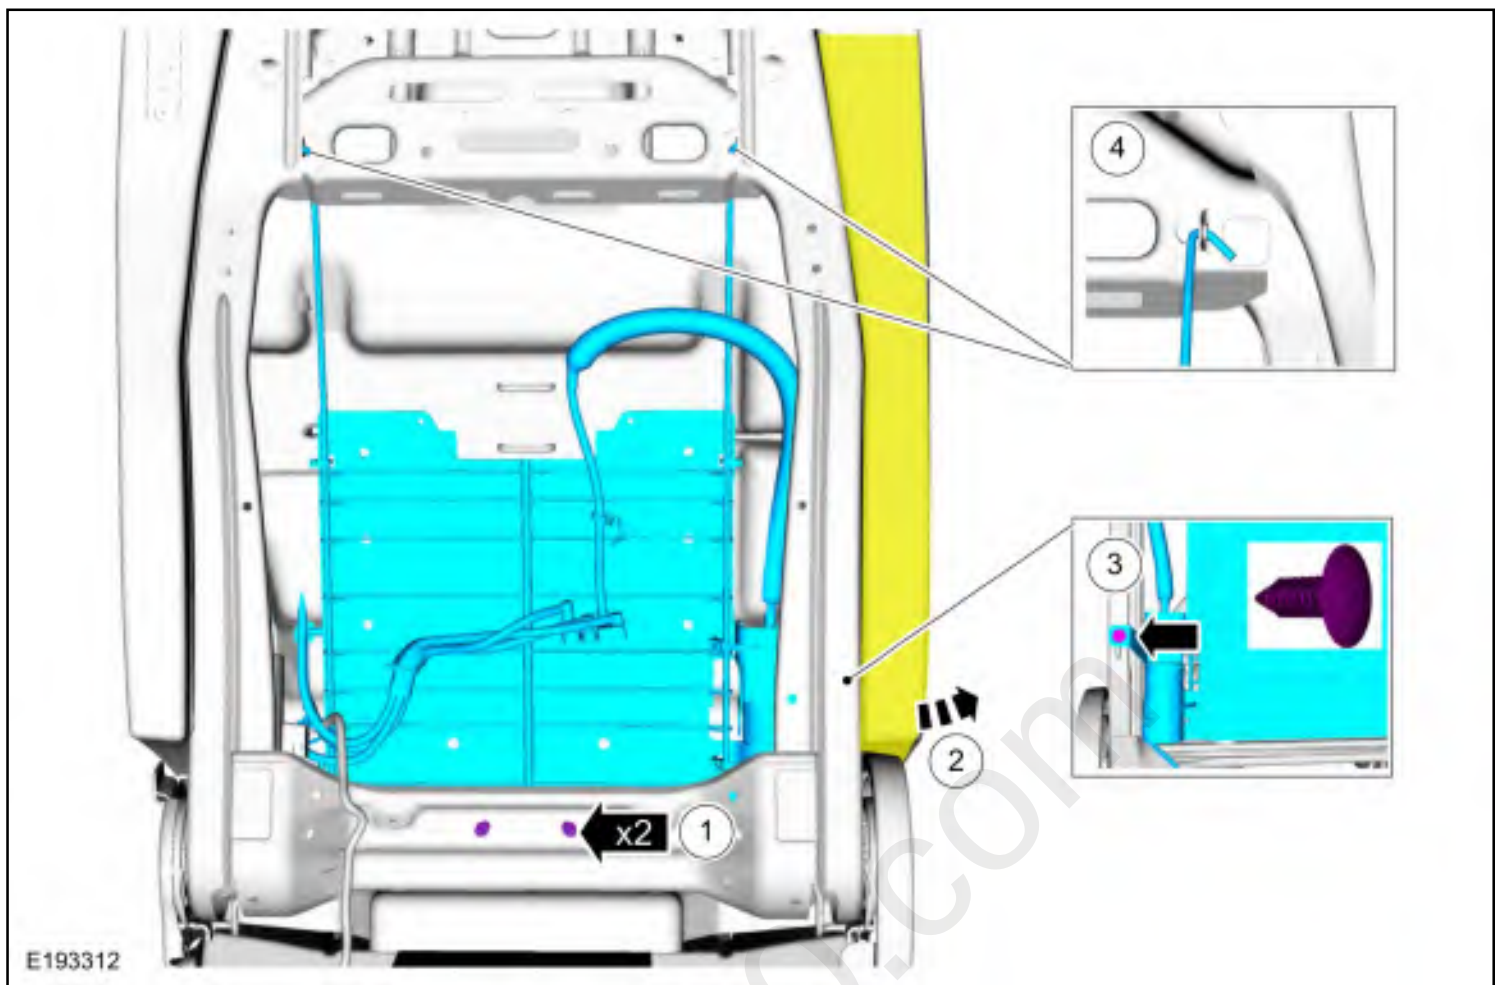

## Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company