

Rear Door Glass Top Run - SuperCrew

Removal

NOTE: LH side shown, RH side similar.

1. Lower the rear door window glass to the full down position.




2. Remove the rear door trim panel.
Refer to: [Rear Door Trim Panel - SuperCrew](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).
3. Remove the inner belt moulding.



E192667



4. Remove the rear door glass top run.

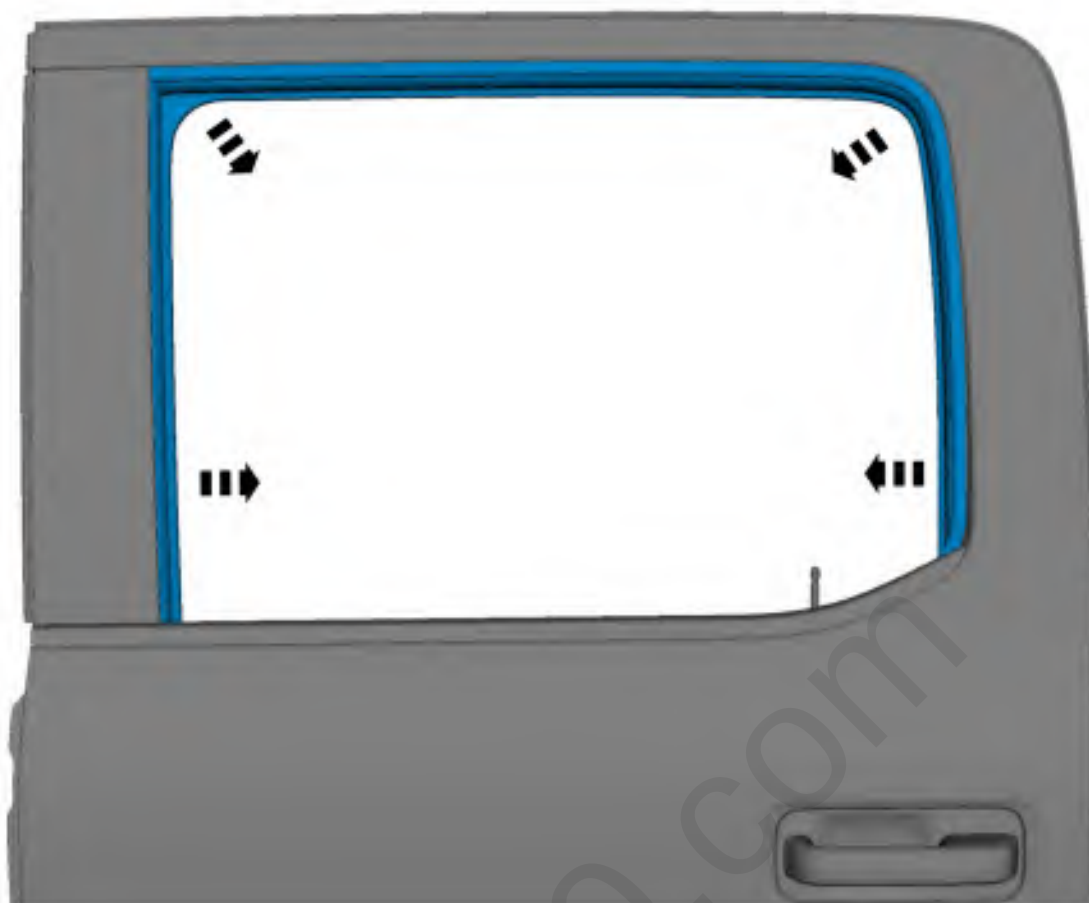

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company