

Door Latch Lubrication

Special Tool(s) / General Equipment

Flat-Bladed Screwdriver

Materials

Name	Specification
Motorcraft® Multi-Purpose Grease Spray XL-5-A	ESB-M1C93-B

Activation

NOTE: *Typical left front door shown, others similar.*


1. Open the door.



E197322



2. Using a flat blade screwdriver, fully close the latch (2 clicks).
Use the General Equipment: Flat-Bladed Screwdriver

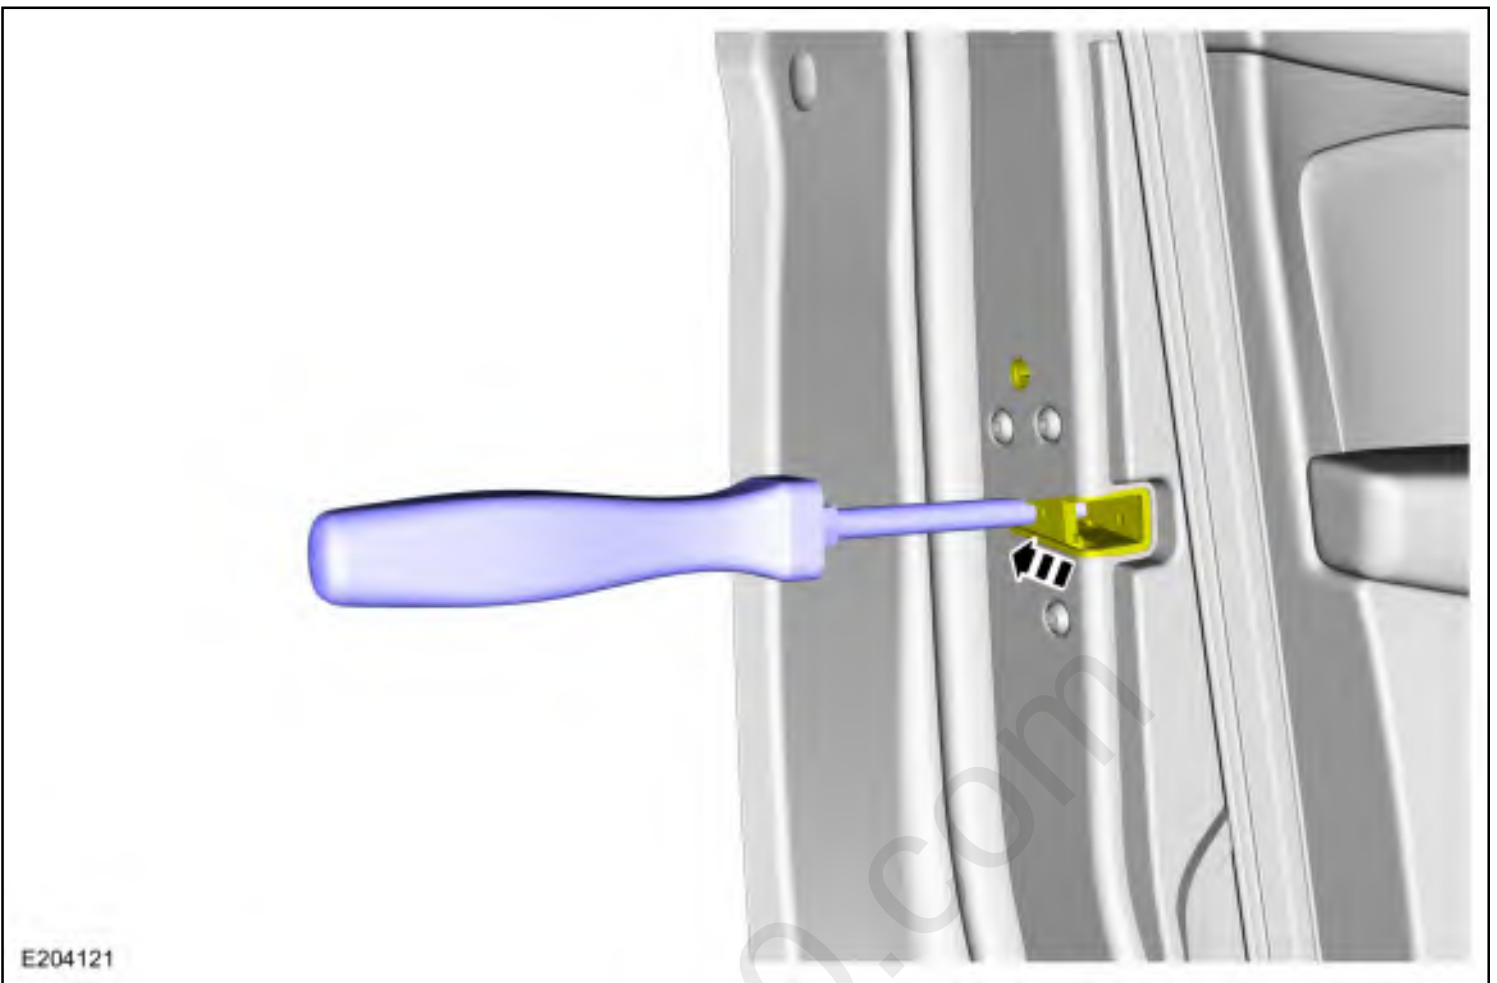

3. **NOTICE: Do not over-lubricate the latch. Using excessive grease may damage the internal lock motor.**

Spray the multi-purpose grease into the opening on the door latch for approximately 5 seconds.

Material: Motorcraft® Multi-Purpose Grease Spray / XL-5-A (ESB-M1C93-B)




E204122



4. **NOTE:** Some exterior door handles are operated mechanically while other exterior door handles are operated electronically.


Open the latch using the exterior door handle.

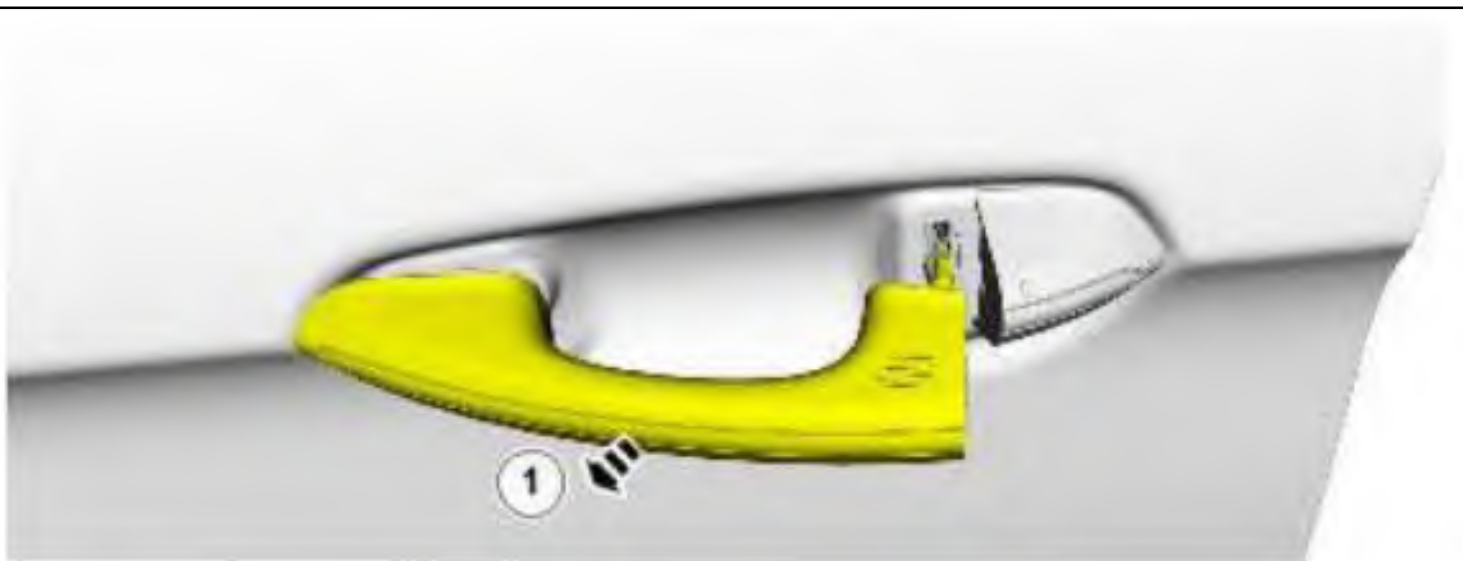

E204123



5. Open and close the door several times to circulate the lubricant inside the latch.

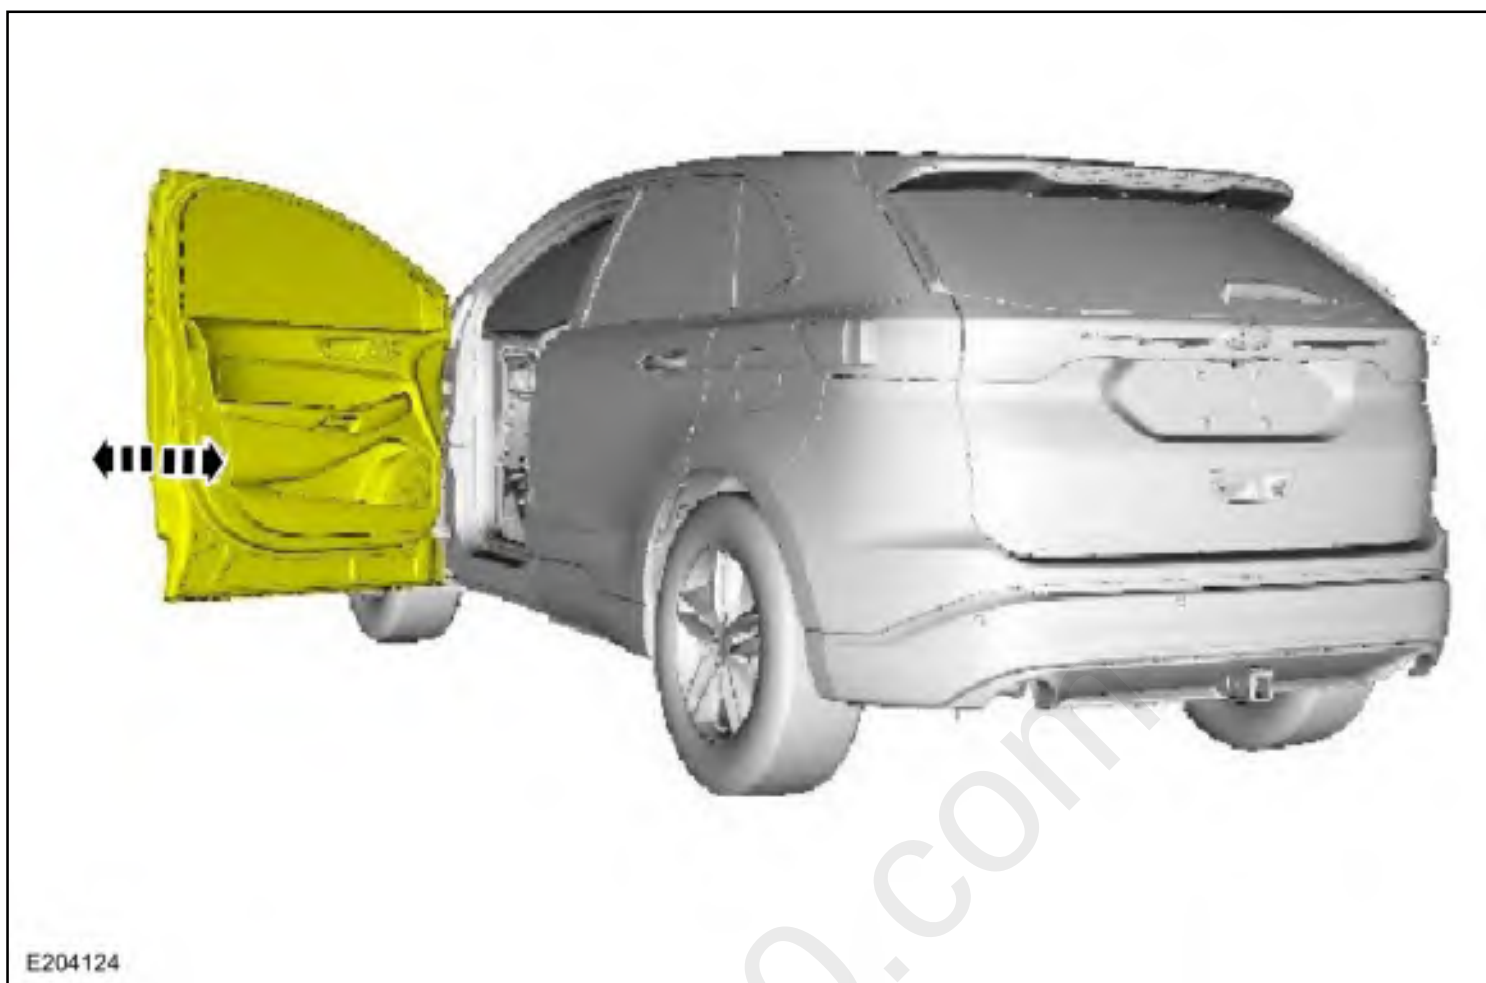

6. Open the door.



E197322



7. Wipe off any excess grease.



E204125



Copyright © 2018 Ford Motor Company