


Rear Door Cable - SuperCab

Removal

NOTE: *LH side shown, RH side similar.*

Upper door latch cable

1. Remove the interior rear door handle.
Refer to: [Interior Rear Door Handle - SuperCab](#) (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).
2. Remove the rear door upper latch.
Refer to: [Rear Door Upper Latch - SuperCab](#) (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).
3. Remove the rear door upper latch cable.

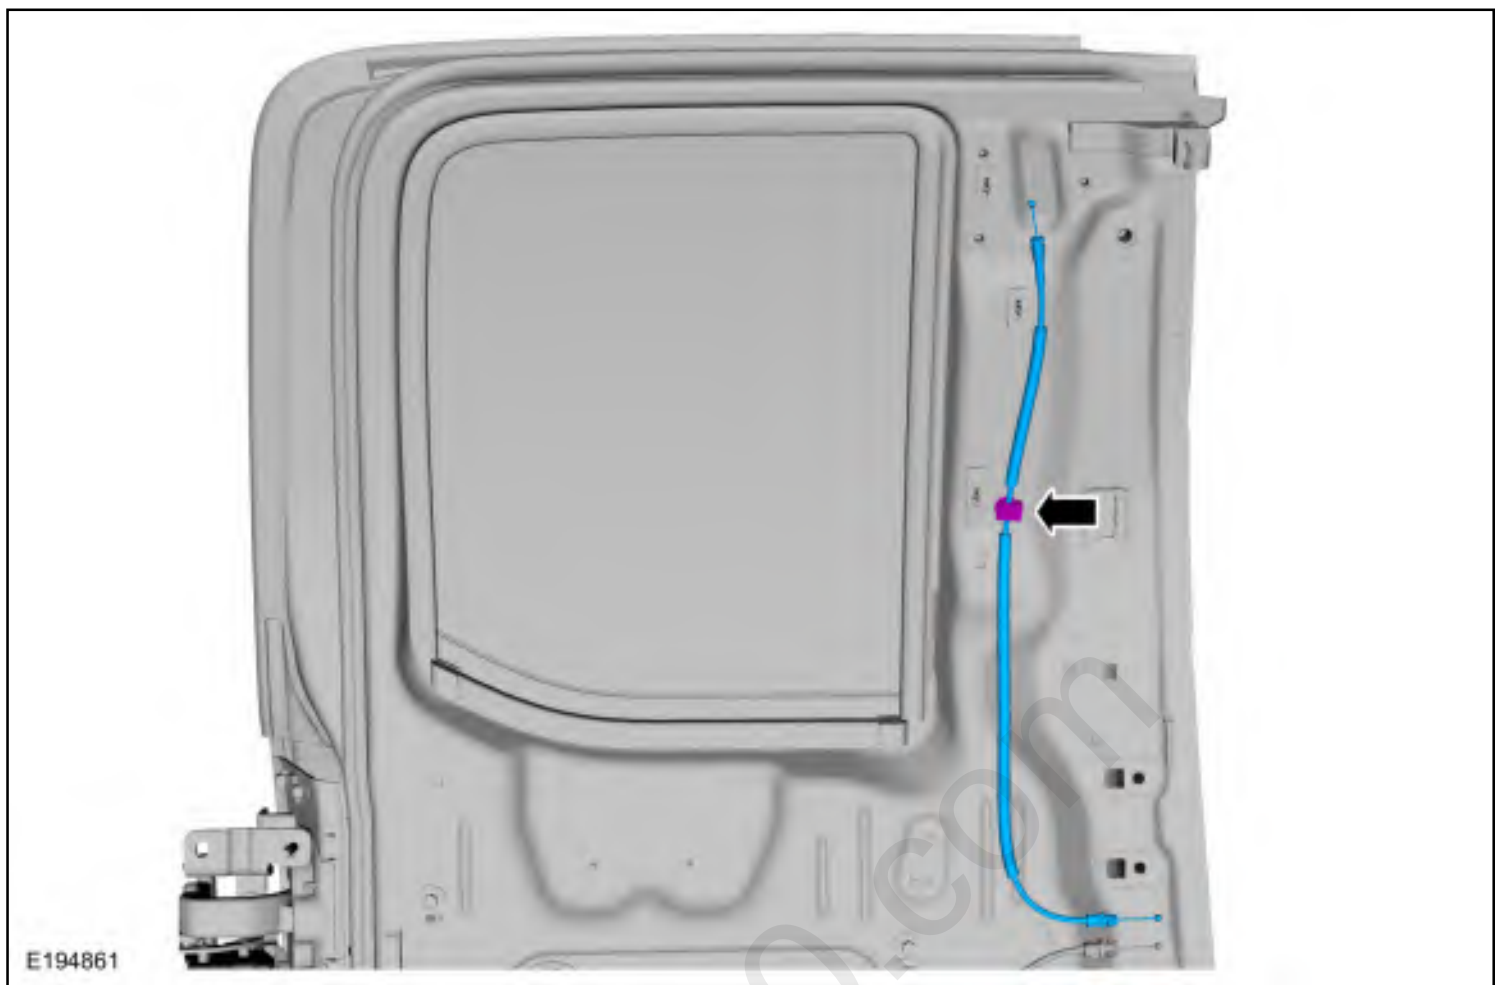

Lower door latch cable

4. **NOTE:** *The lower door latch cable is serviced with the rear door lower latch as an assembly.*

Remove the rear door lower latch.

Refer to: [Rear Door Lower Latch - SuperCab](#) (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).

Installation

1. To install, reverse the removal procedure.