


Trough Assembly


Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the roof opening panel glass.
Refer to: [Roof Opening Panel Glass](#) (501-17B Roof Opening Panel - Vehicles With: Vista Roof Opening Panel, Removal and Installation).
2. Detach the trough assembly arms on both sides.

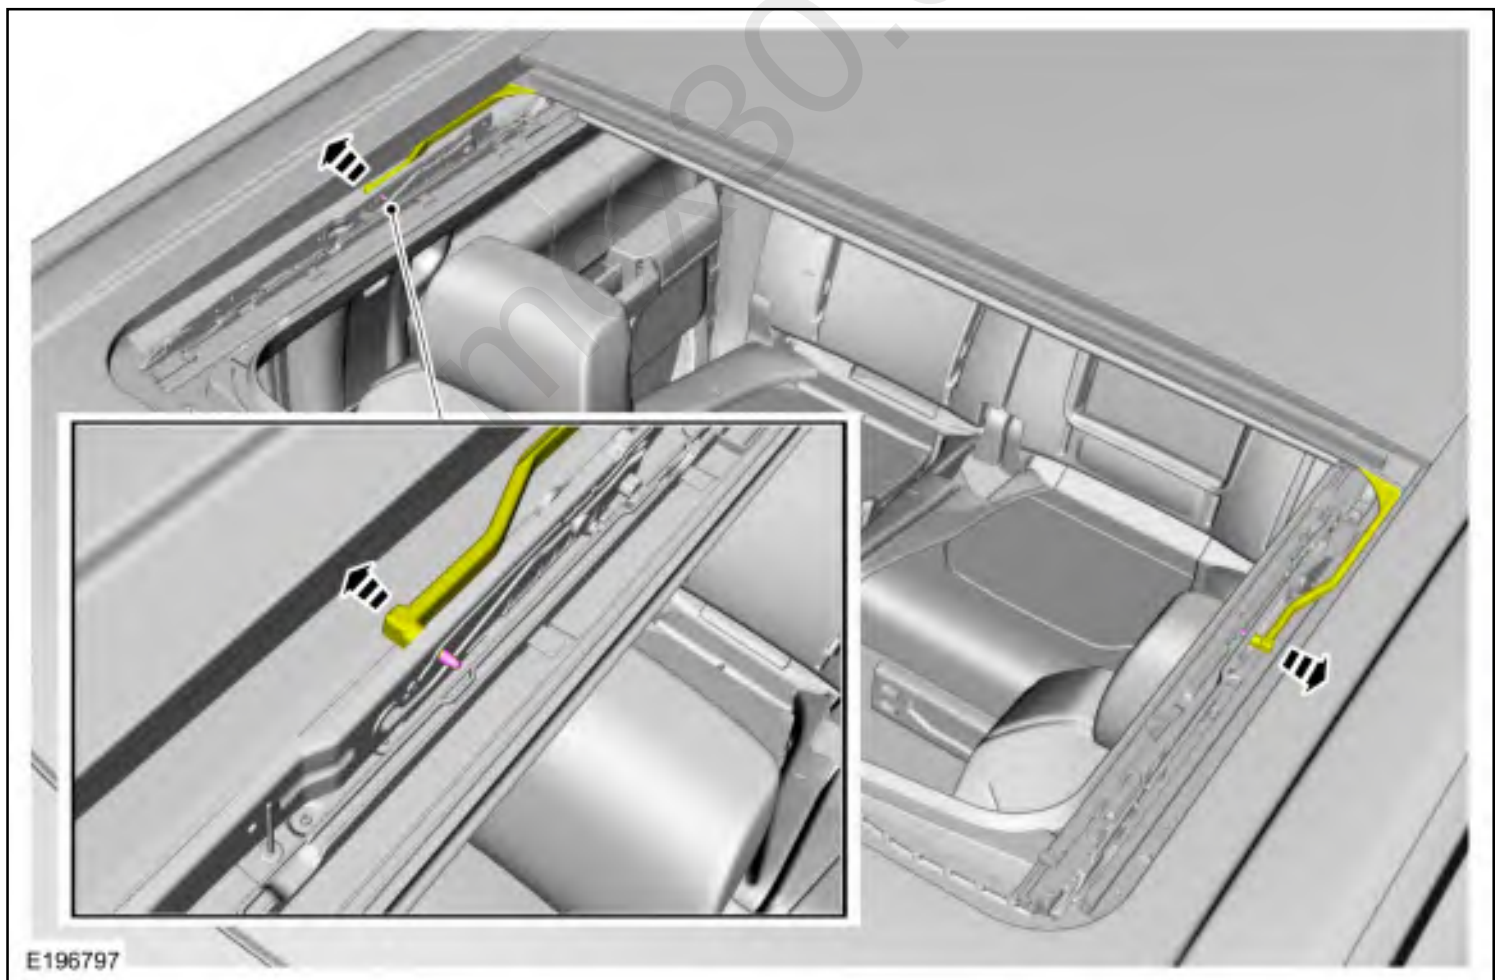

3. Pull the trough assembly towards the front of the vehicle and remove the trough assembly.

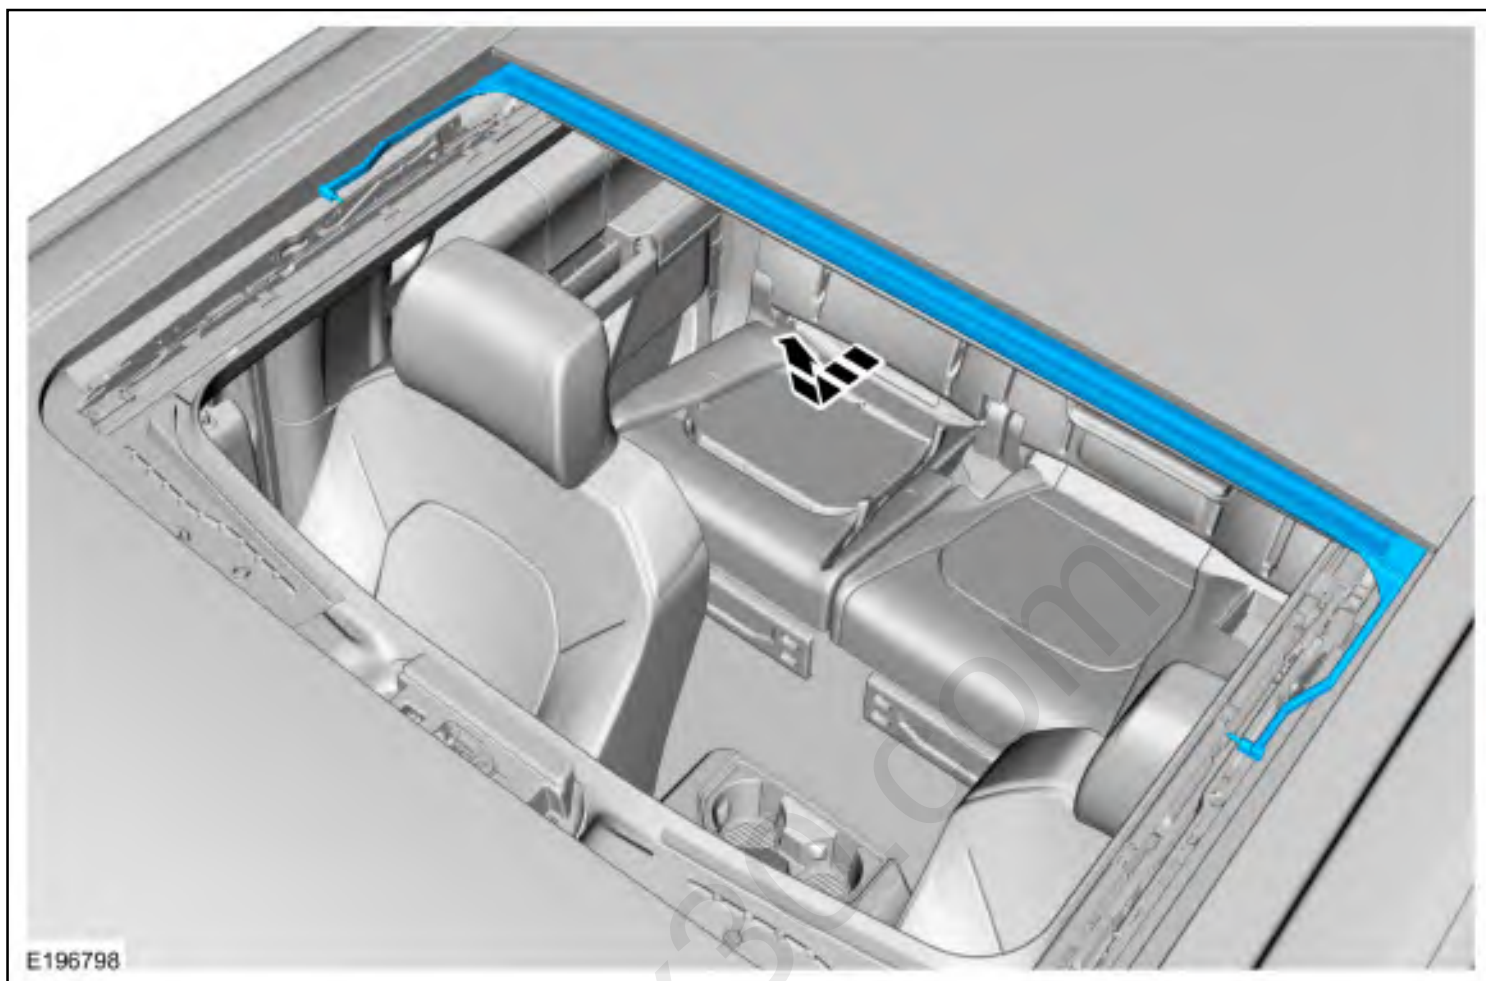

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company