


Rear Bumper


Base Part Number: Base Part Number: 17F838

DISASSEMBLY


1. Remove the rear bumper.
Refer to: [Rear Bumper](#) (501-19 Bumpers, Removal and Installation).
2. Disconnect the electrical connectors, separate the wire harness guides and remove the rear bumper wire harness

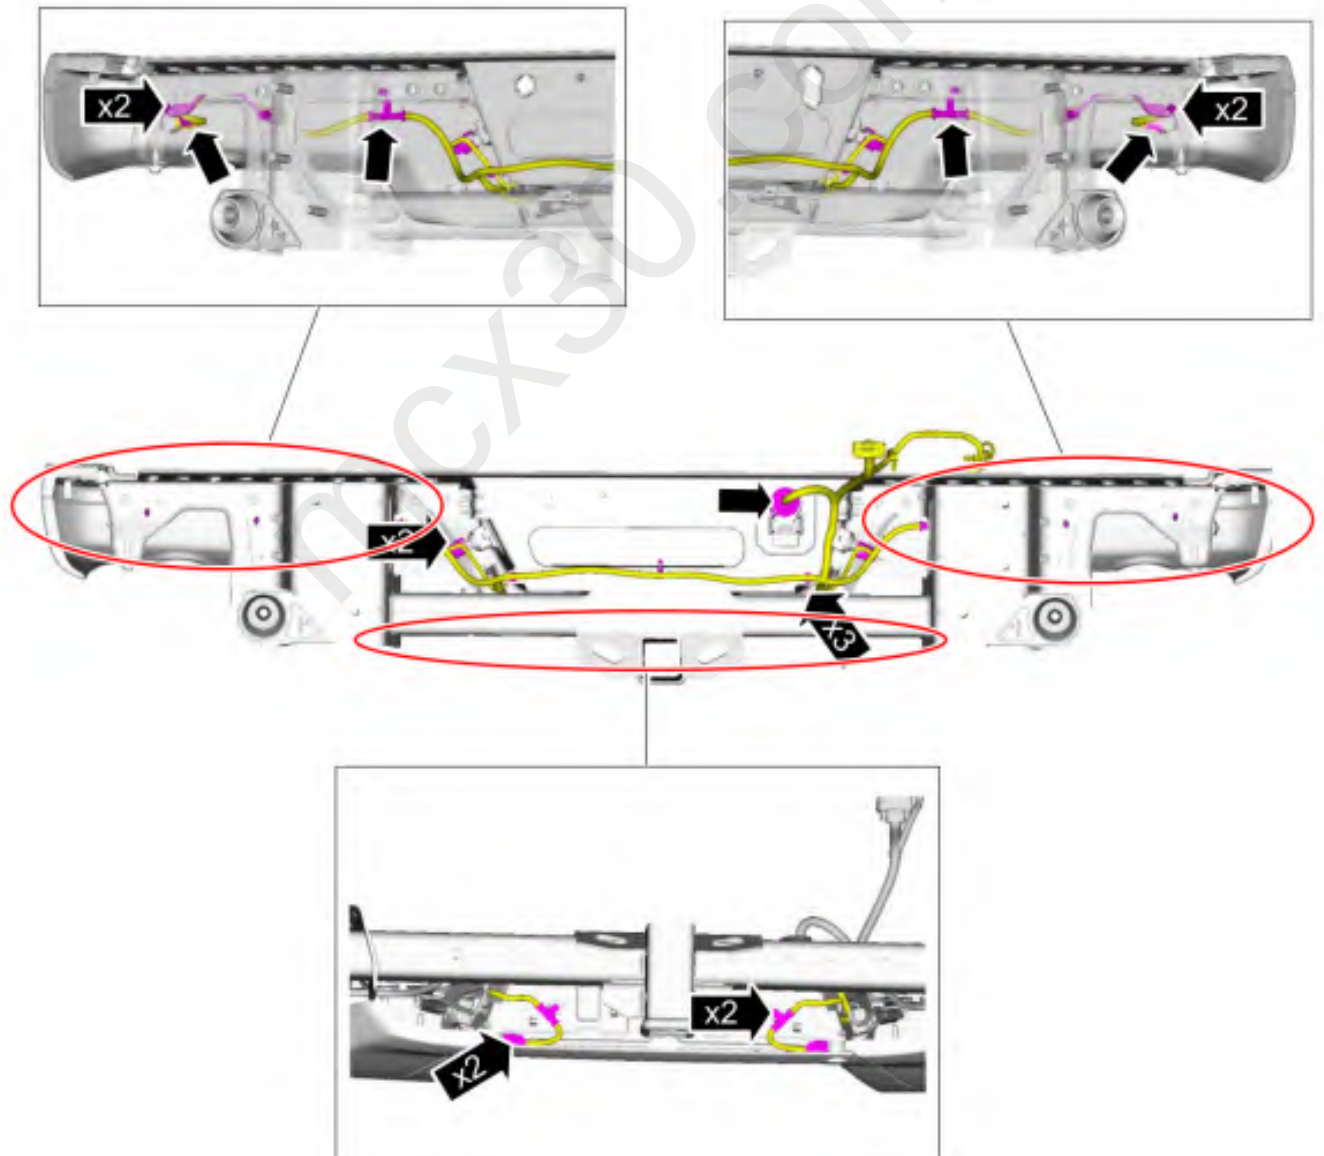


3. Release the tabs and remove the license plate lamp.

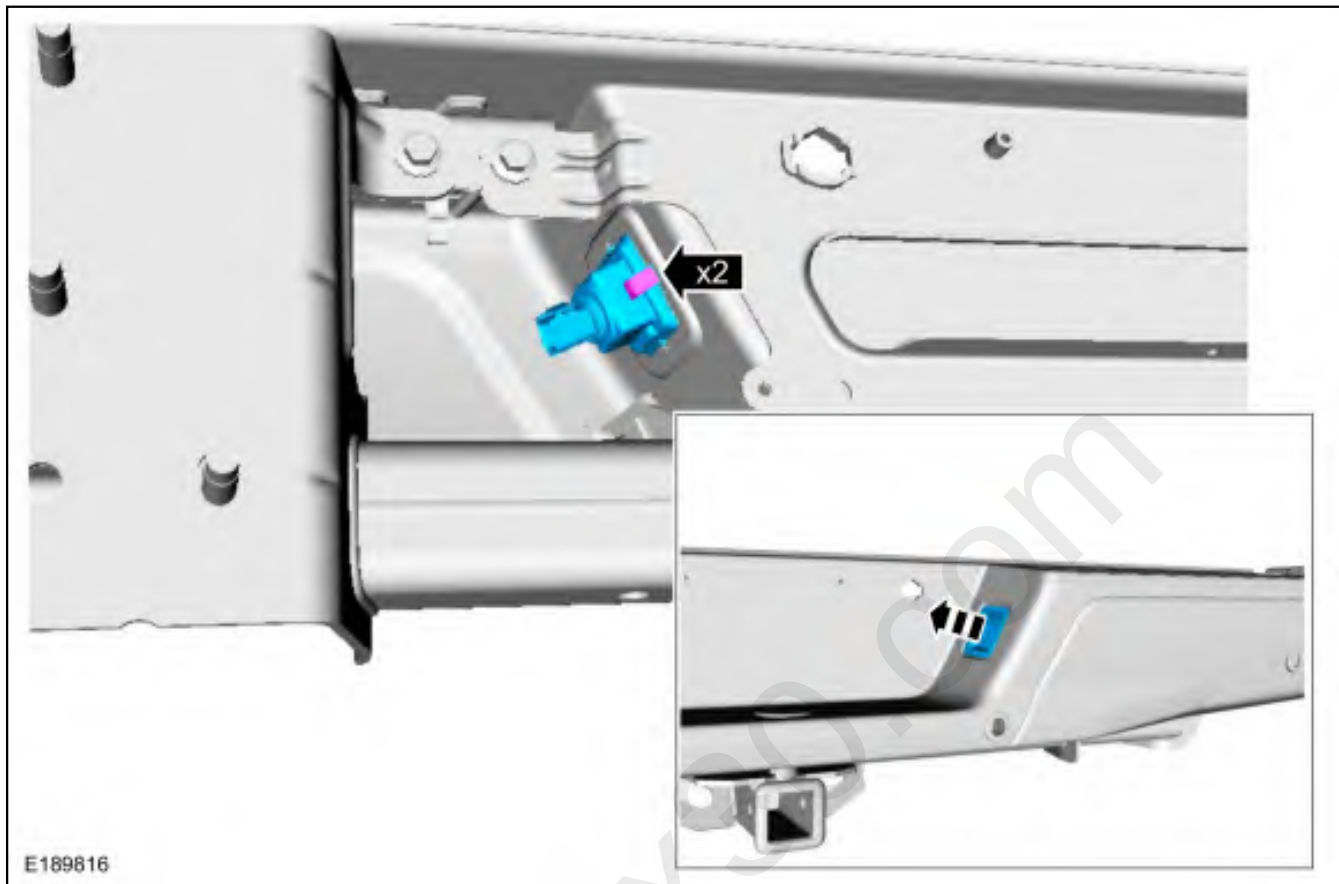

4. Release the tabs and remove the trailer brake electrical connector.

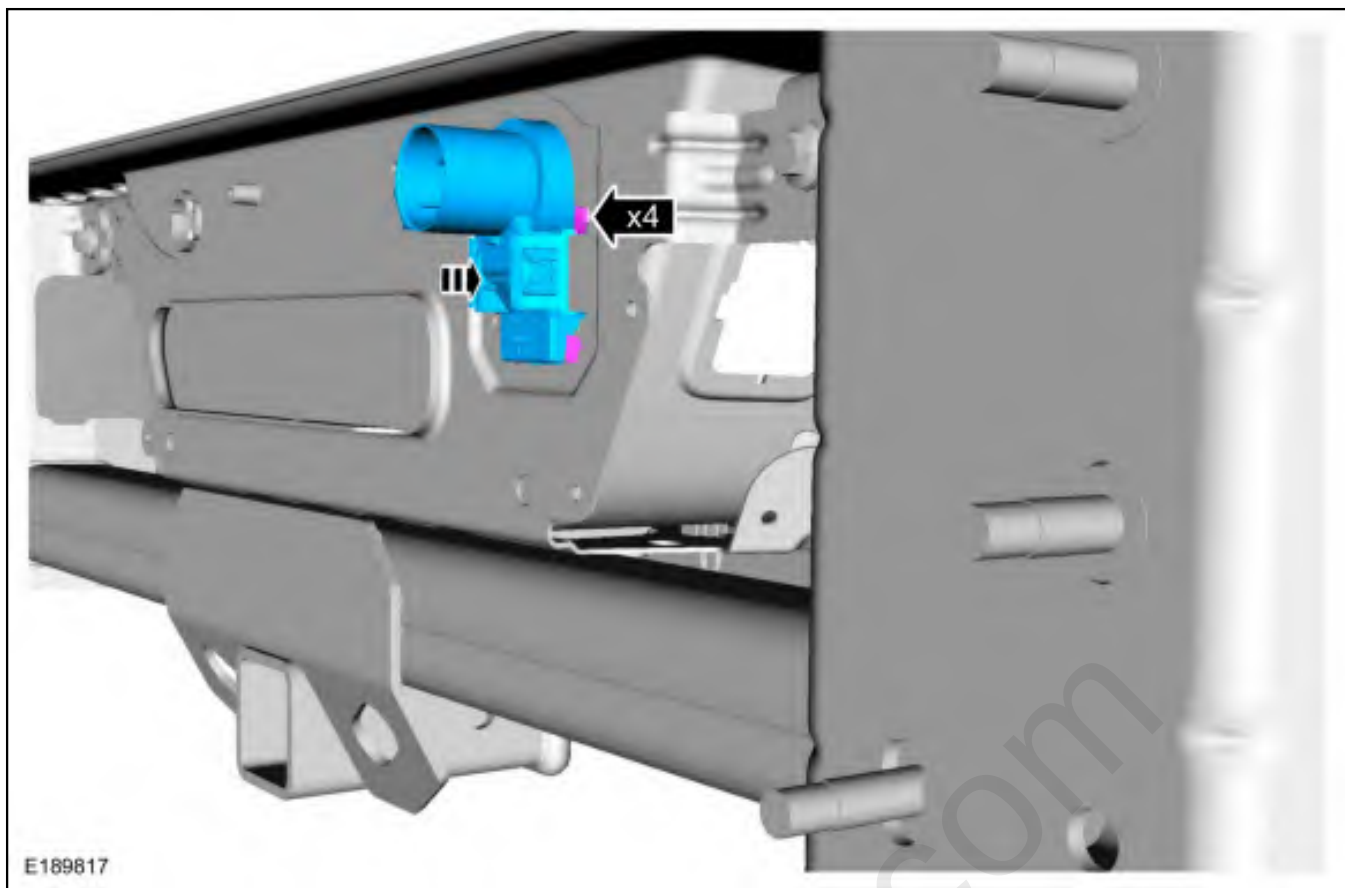


5. Remove the parking aid sensors.
 1. Release the tabs.
 2. Remove the parking aid sensor from the parking sensor bracket.

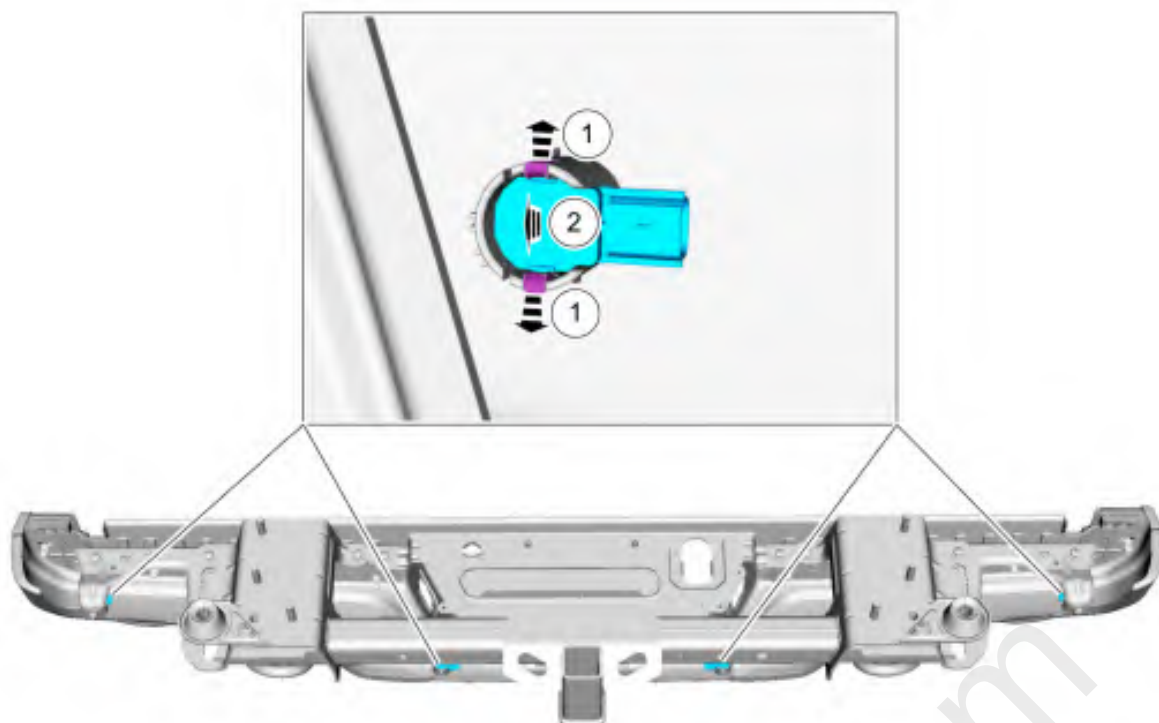

E243003




6. Release the tabs and remove the parking aid sensor brackets.

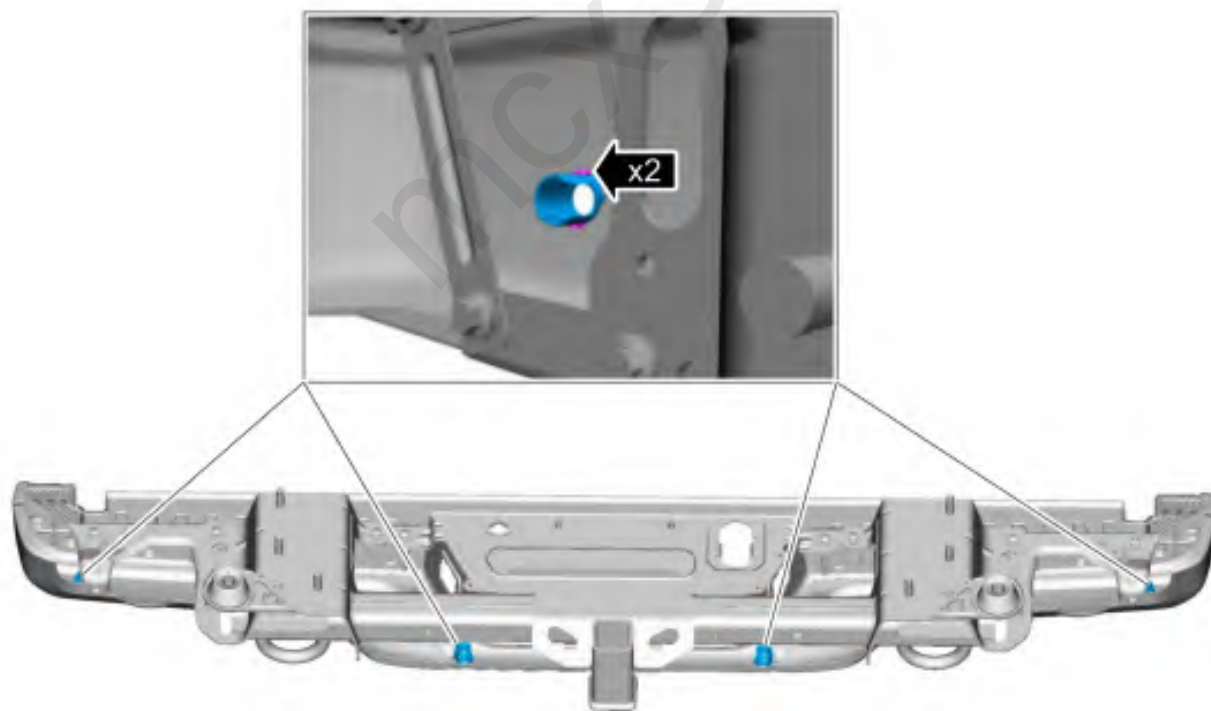


E243004



7. Release the tabs and remove the rear bumper step plate.

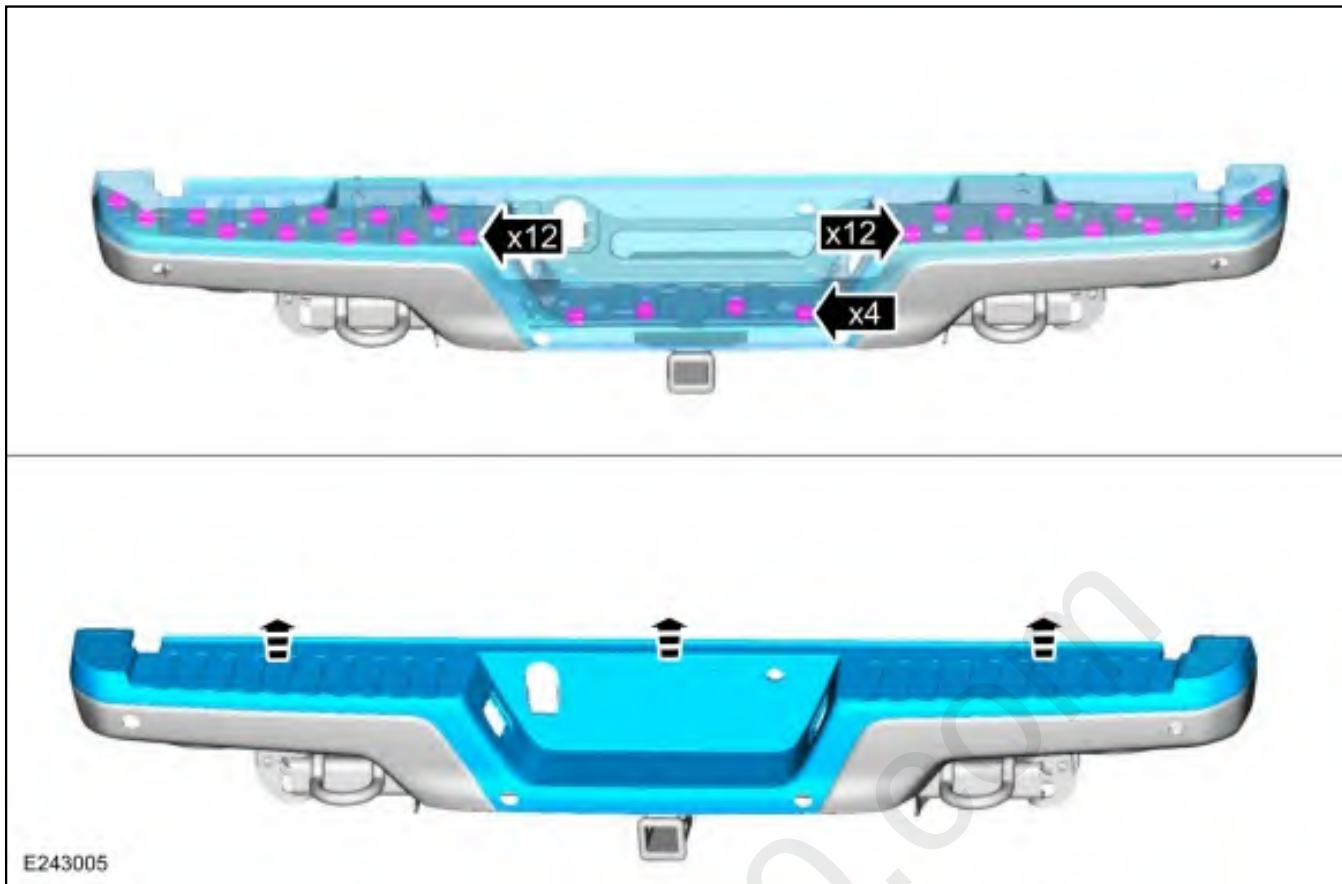


8. Remove the screws and the trailer hitch assembly.
Torque: 18 lb.ft (25 Nm)

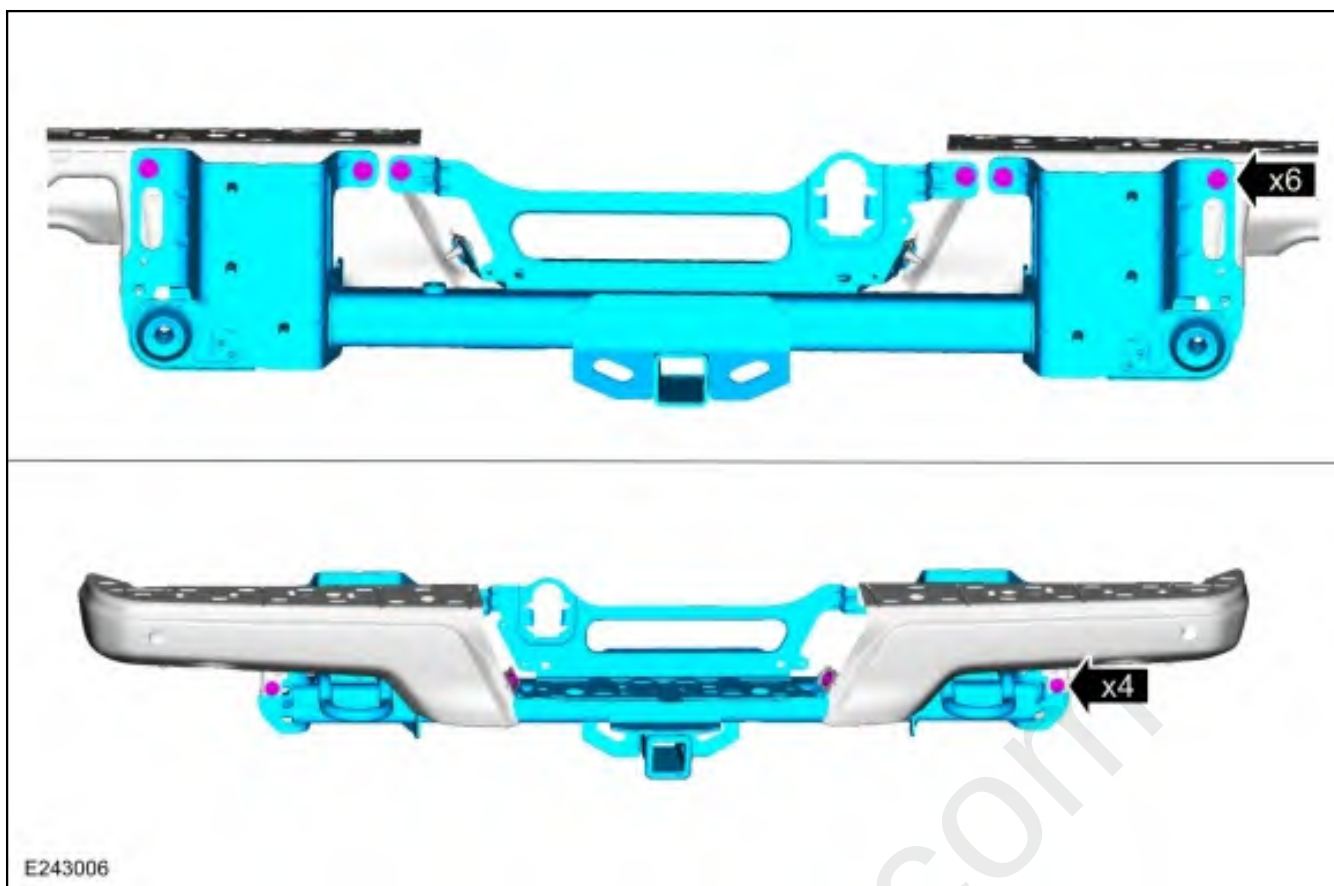

9. **NOTE:** *On both sides.*

Remove the screws and the outer rear bumper brace.
 Torque: 18 lb.ft (25 Nm)

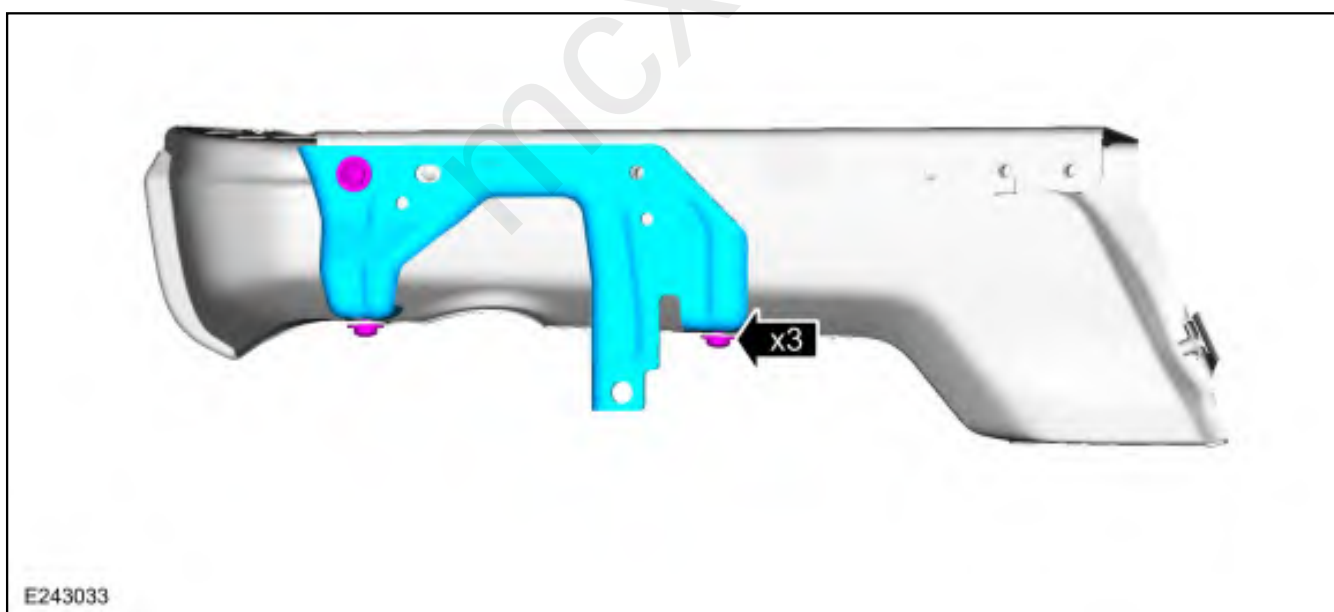

ASSEMBLY

1. To assemble, reverse the disassembly procedure.

mcx30.com