

Child Safety Seat Tether Anchor - SuperCab/ SuperCrew

Removal


NOTE: Removal steps in this procedure may contain installation details.

SuperCab

1. **NOTE:** The striker should be in its lowest position for the latch to engage.

Lower the LH backrest.

1. Pull the backrest release strap and release the latch from the striker.
2. Lower the backrest.

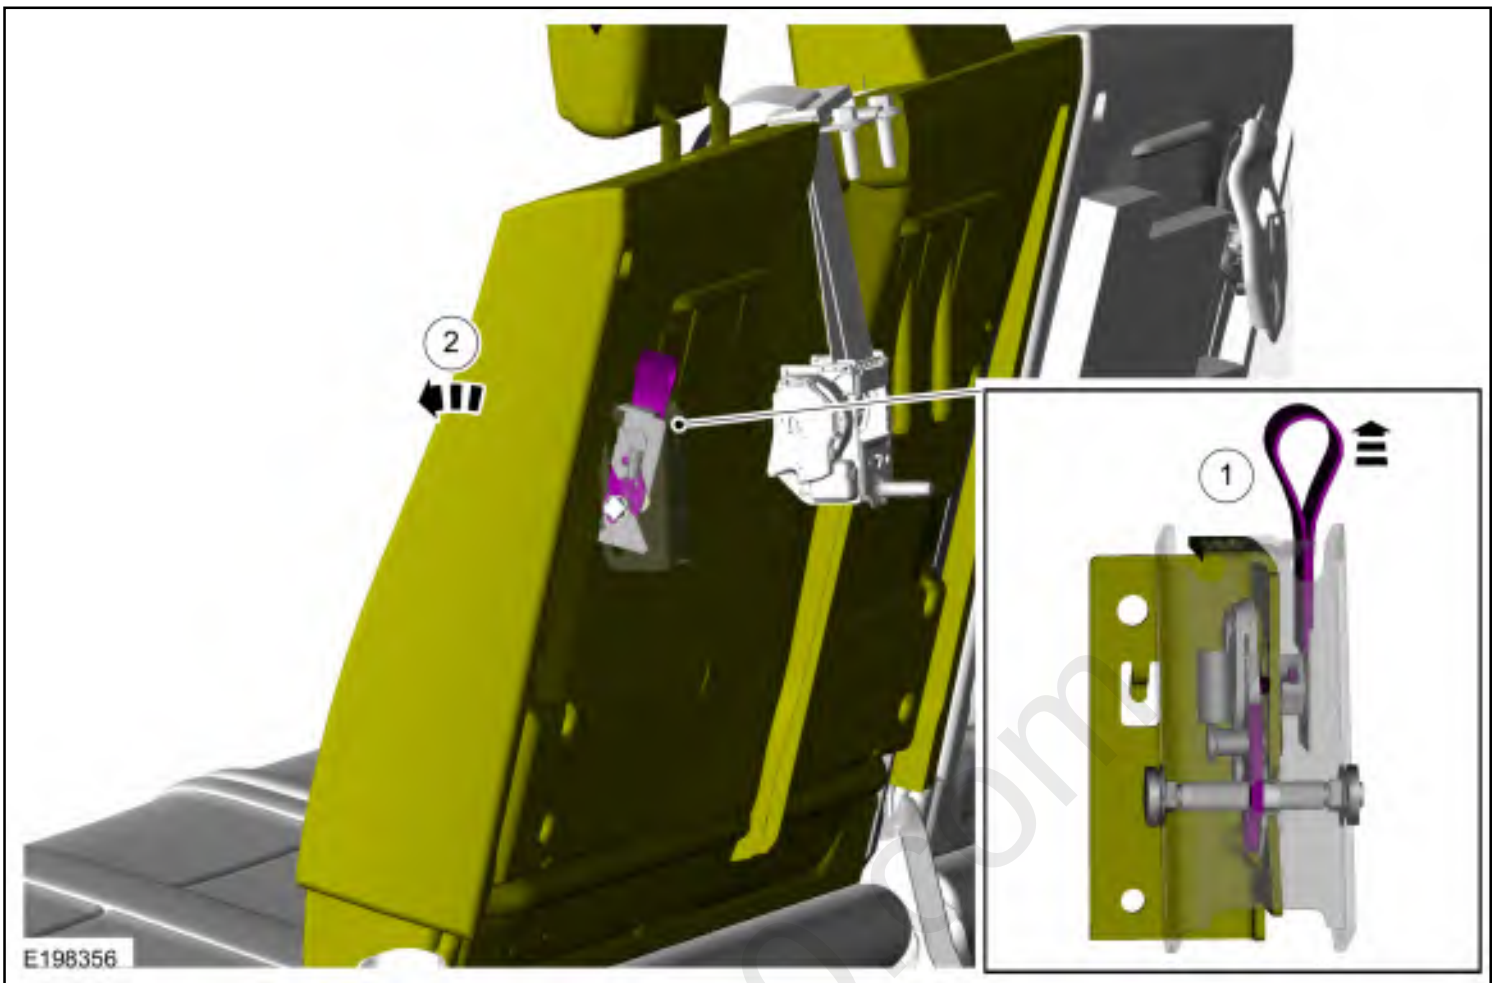


SuperCrew

2. **NOTE:** *The seat backrest latch is only accessible when the seat cushion is raised.*

NOTE: *The striker should be in its lowest position for the latch to engage.*

Fold the LH rear seat backrest down.

1. Raise the seat cushion.
2. Release the seat latch.
3. Fold the seat backrest down.

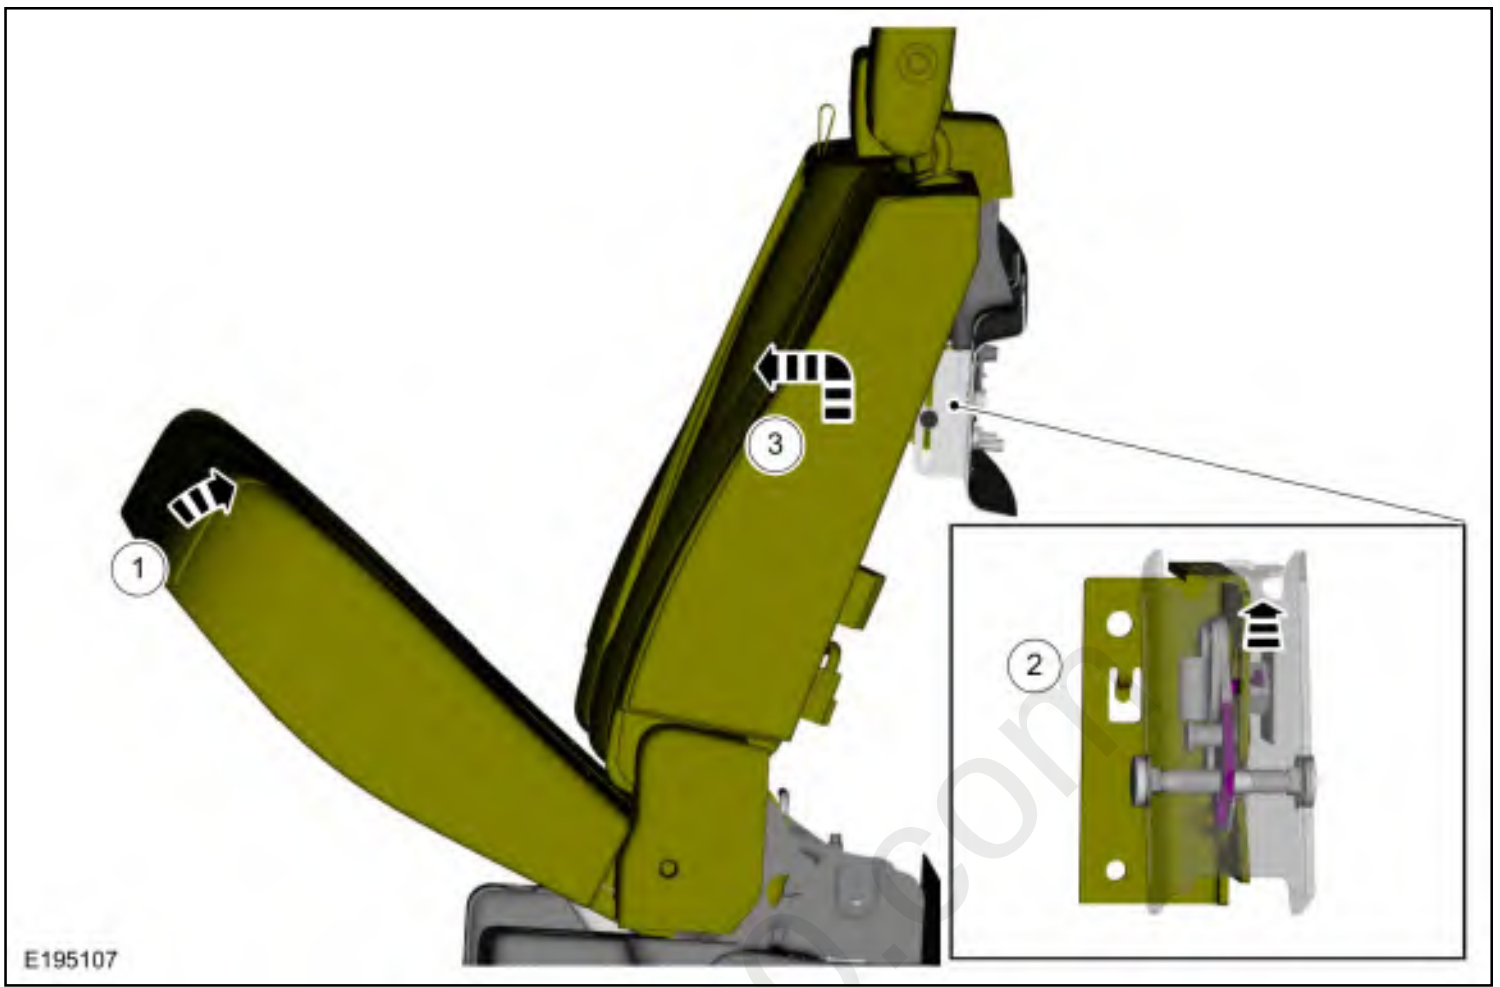


SuperCab and SuperCrew


3. Release the seat latch and fold the RH rear seat backrest down.



E194399




4. Remove the pin-type retainer and position the load space trim panel aside.

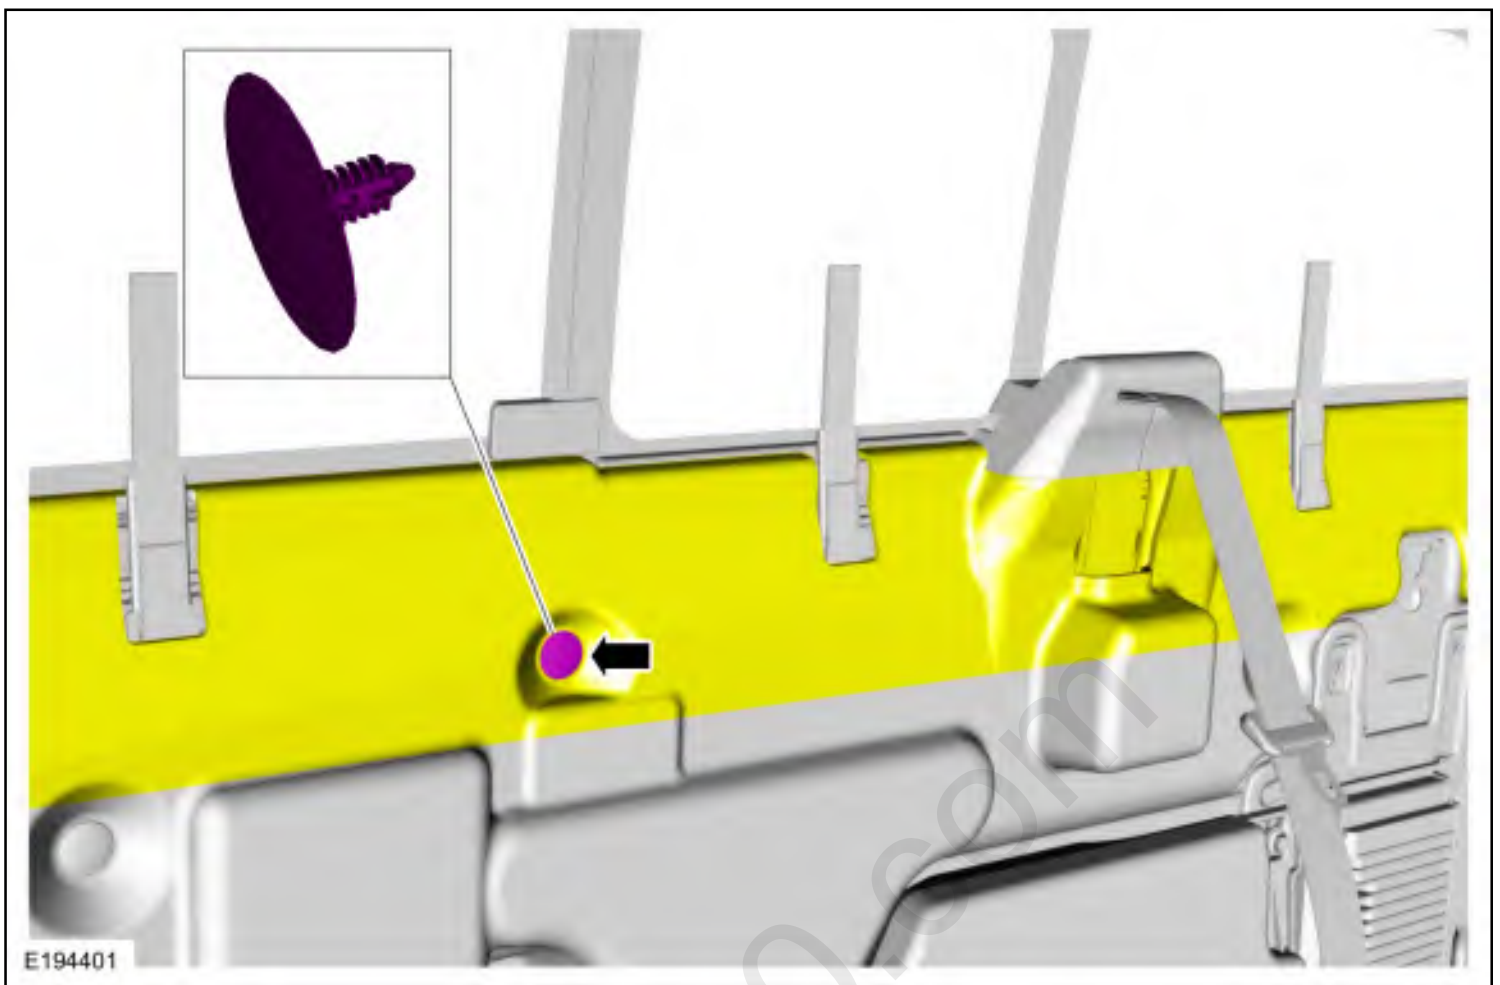

5. **NOTE:** *The load space trim panel has been removed for clarity.*

Remove the bolt(s) and the child safety seat tether anchor(s).

Torque: 18 lb.ft (25 Nm)

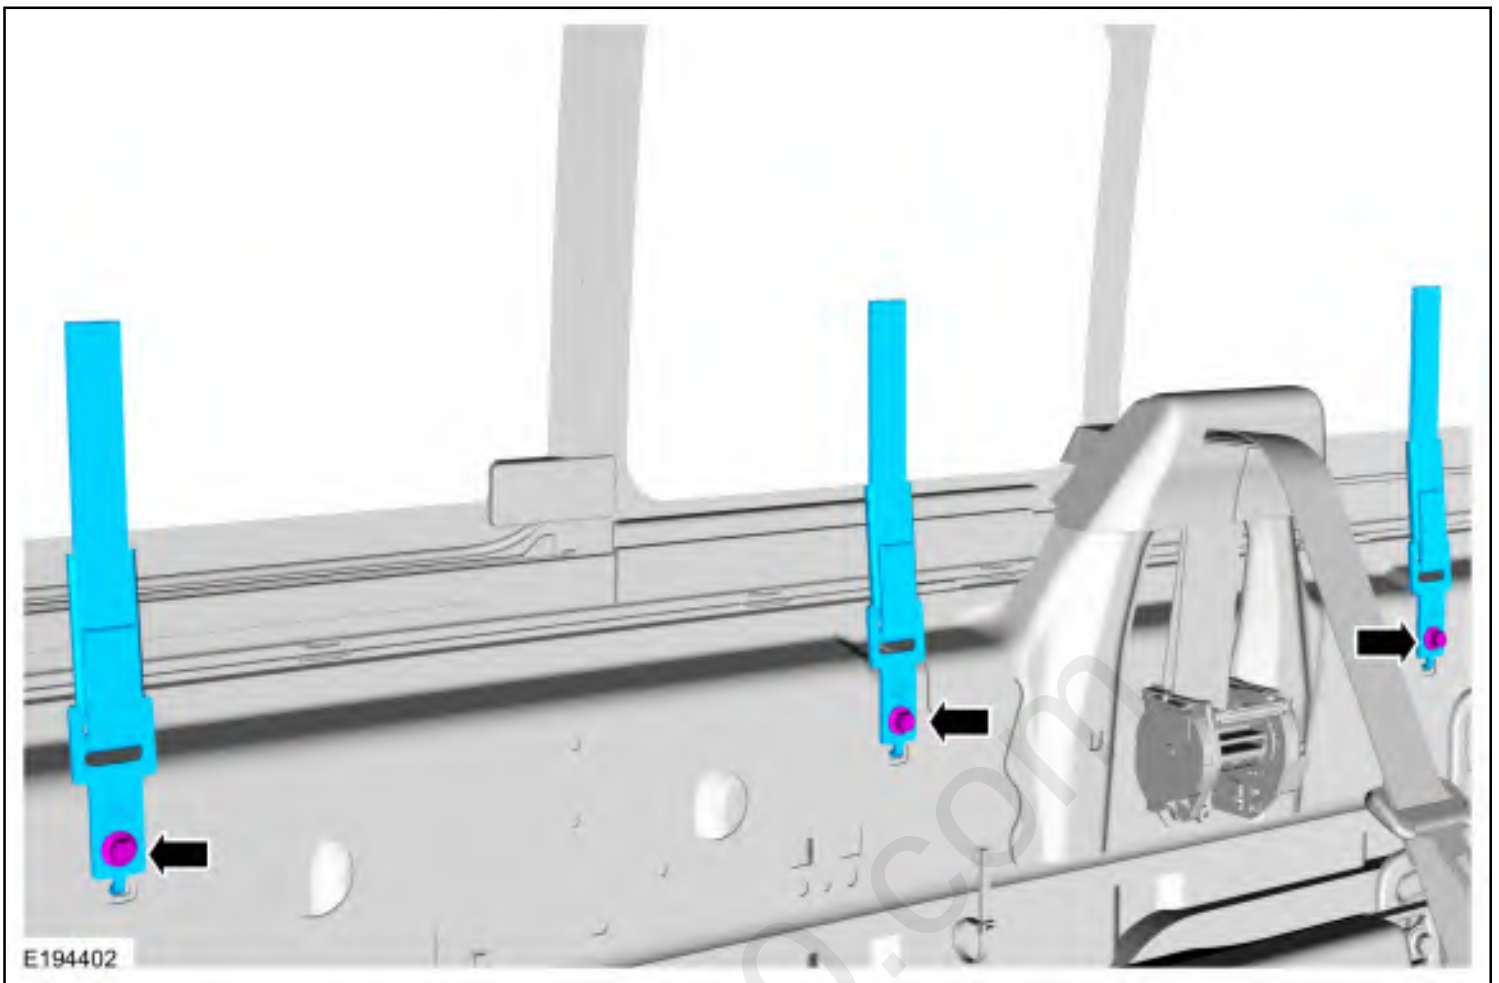

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company