

Child Safety Seat Tether Anchor - Regular Cab


Removal

NOTE: Removal steps in this procedure may contain installation details.


1. Position the passenger seat.



2. If equipped, release the seat latch and fold the center seat backrest down.

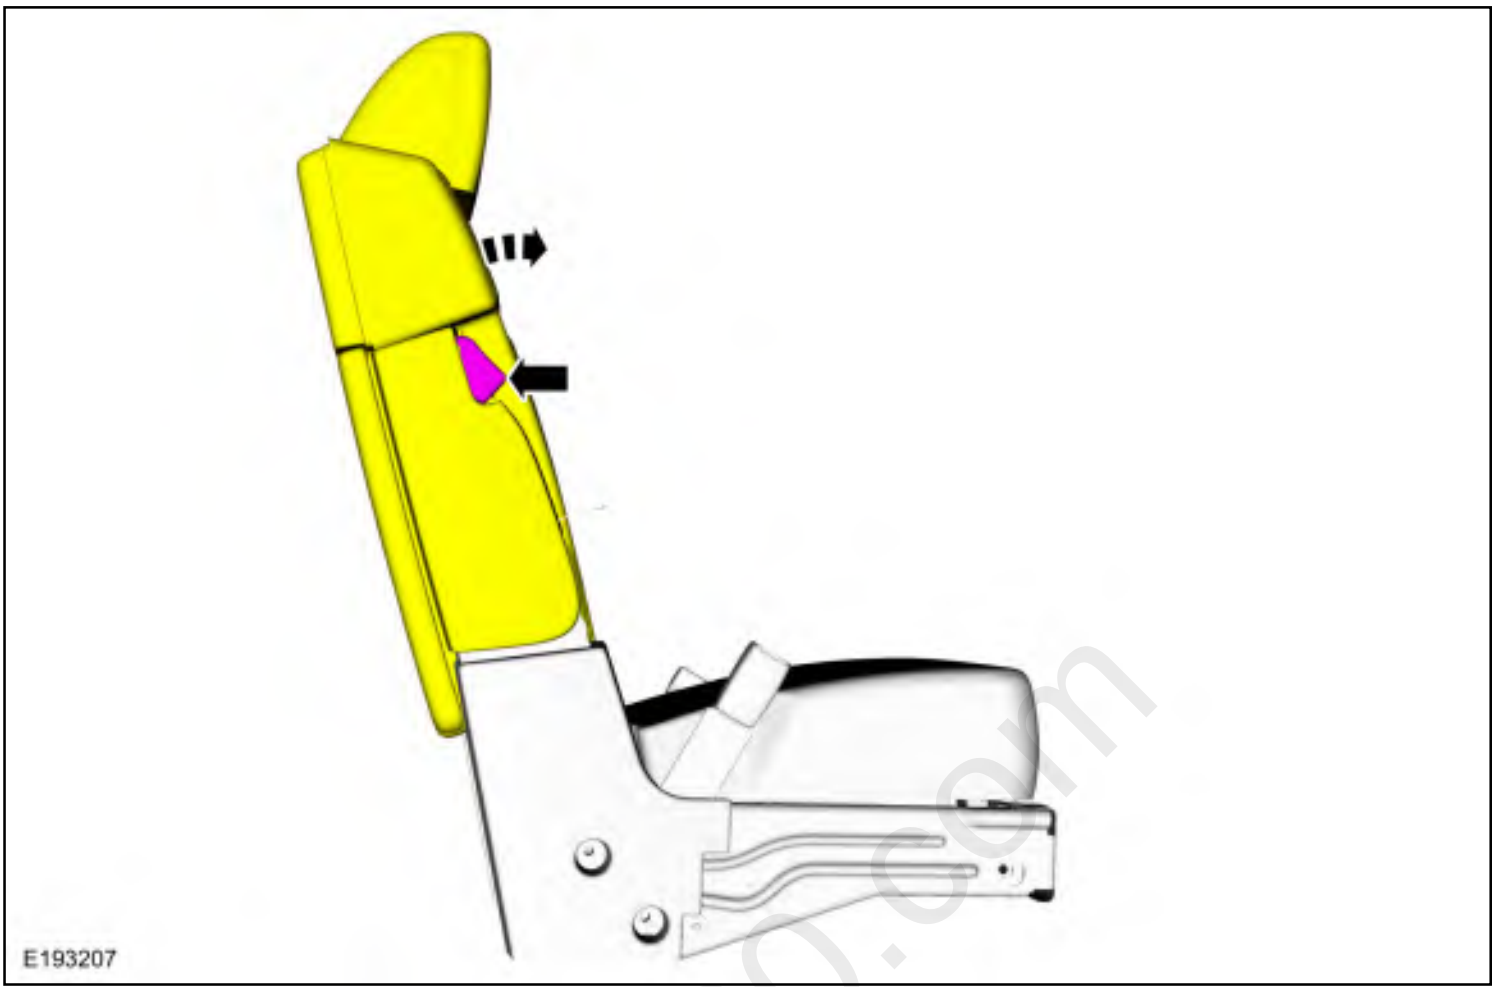

3. Remove the bolt(s) and the child safety seat tether anchor(s).
Torque: 18 lb.ft (25 Nm)

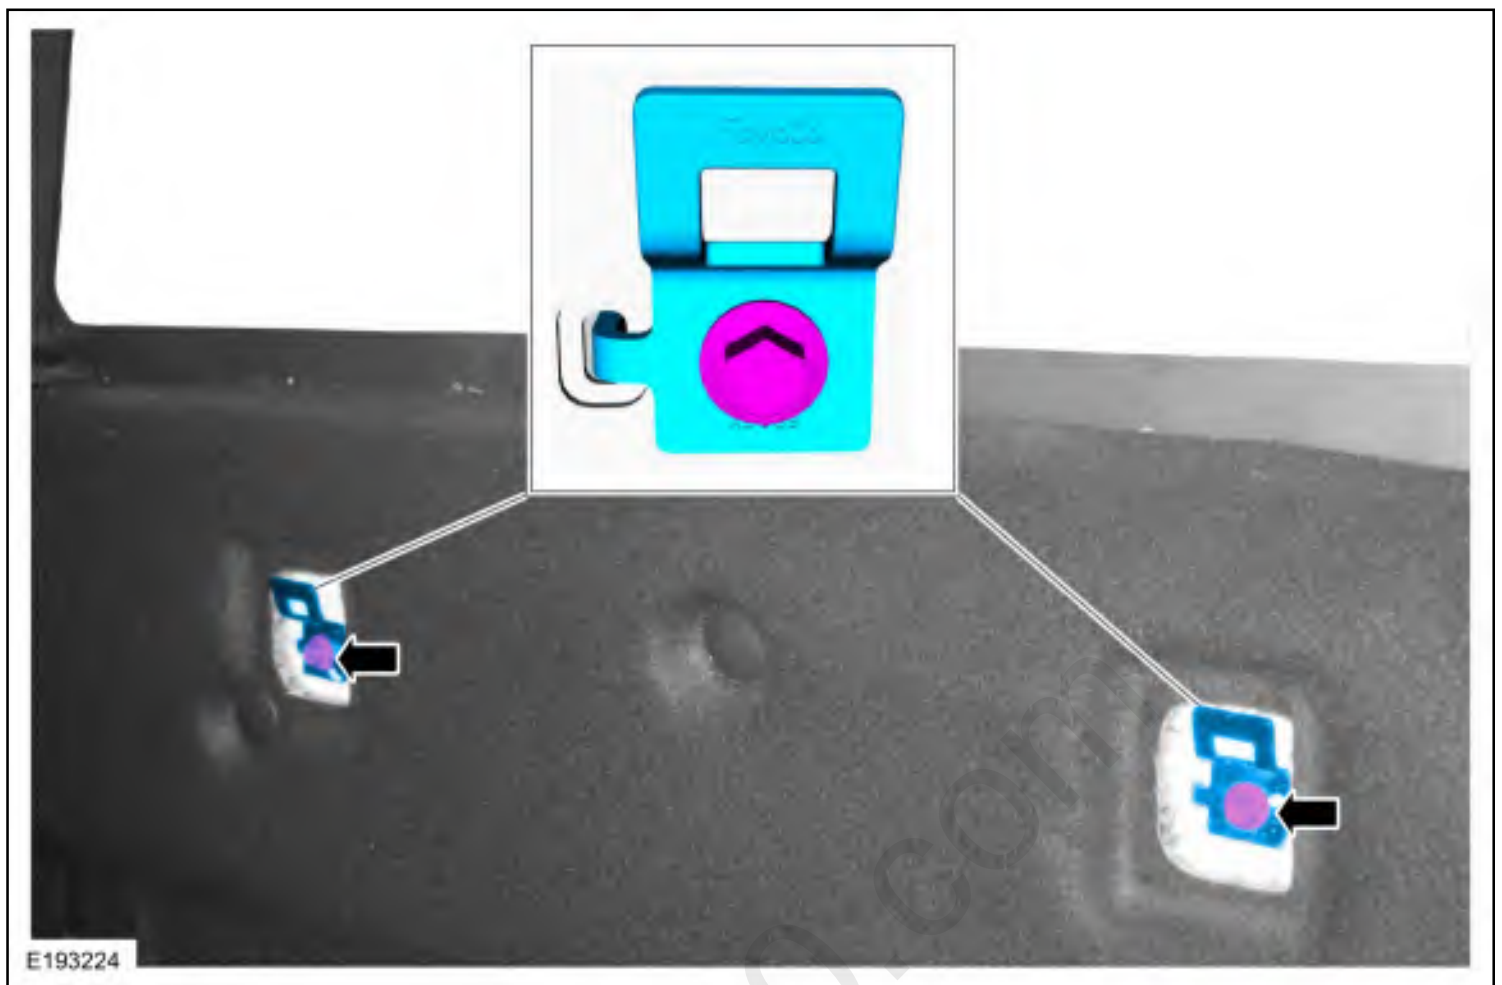

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company