

Brake Caliper Anchor Plate

Removal


NOTE: Removal steps in this procedure may contain installation details.

All vehicles

1. Remove the brake pads.
Refer to: [Brake Pads - Vehicles Without: Electronic Parking Brake \(EPB\)](#) (206-04 Rear Disc Brake, Removal and Installation).
Refer to: Brake Pads - Vehicles With: Electronic Parking Brake (EPB) (206-04 Rear Disc Brake) .

Vehicles without electronic parking brake (EPB)

2. Remove the 2 bolts and the anchor plate. Discard the bolts
Torque:
M14 Bolt :: 111 lb.ft (150 Nm)

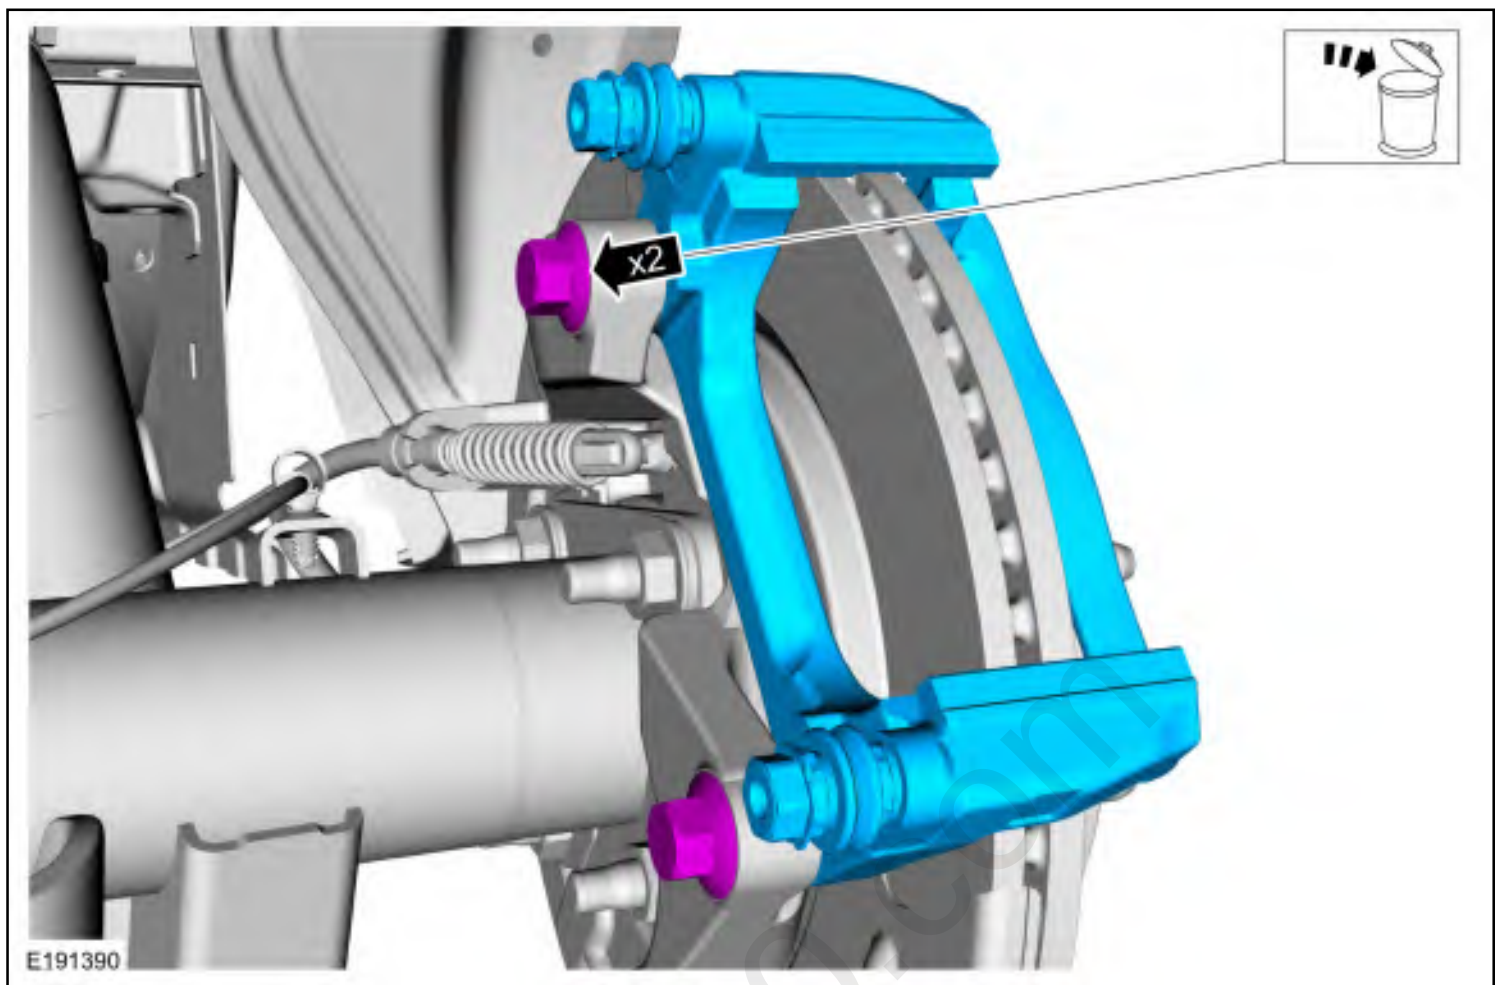


Vehicles with electronic parking brake (EPB)

3. Type 1

Remove the 2 bolts and the anchor plate. Discard the bolts

Torque:

M16 Bolt :: 181 lb.ft (245 Nm)

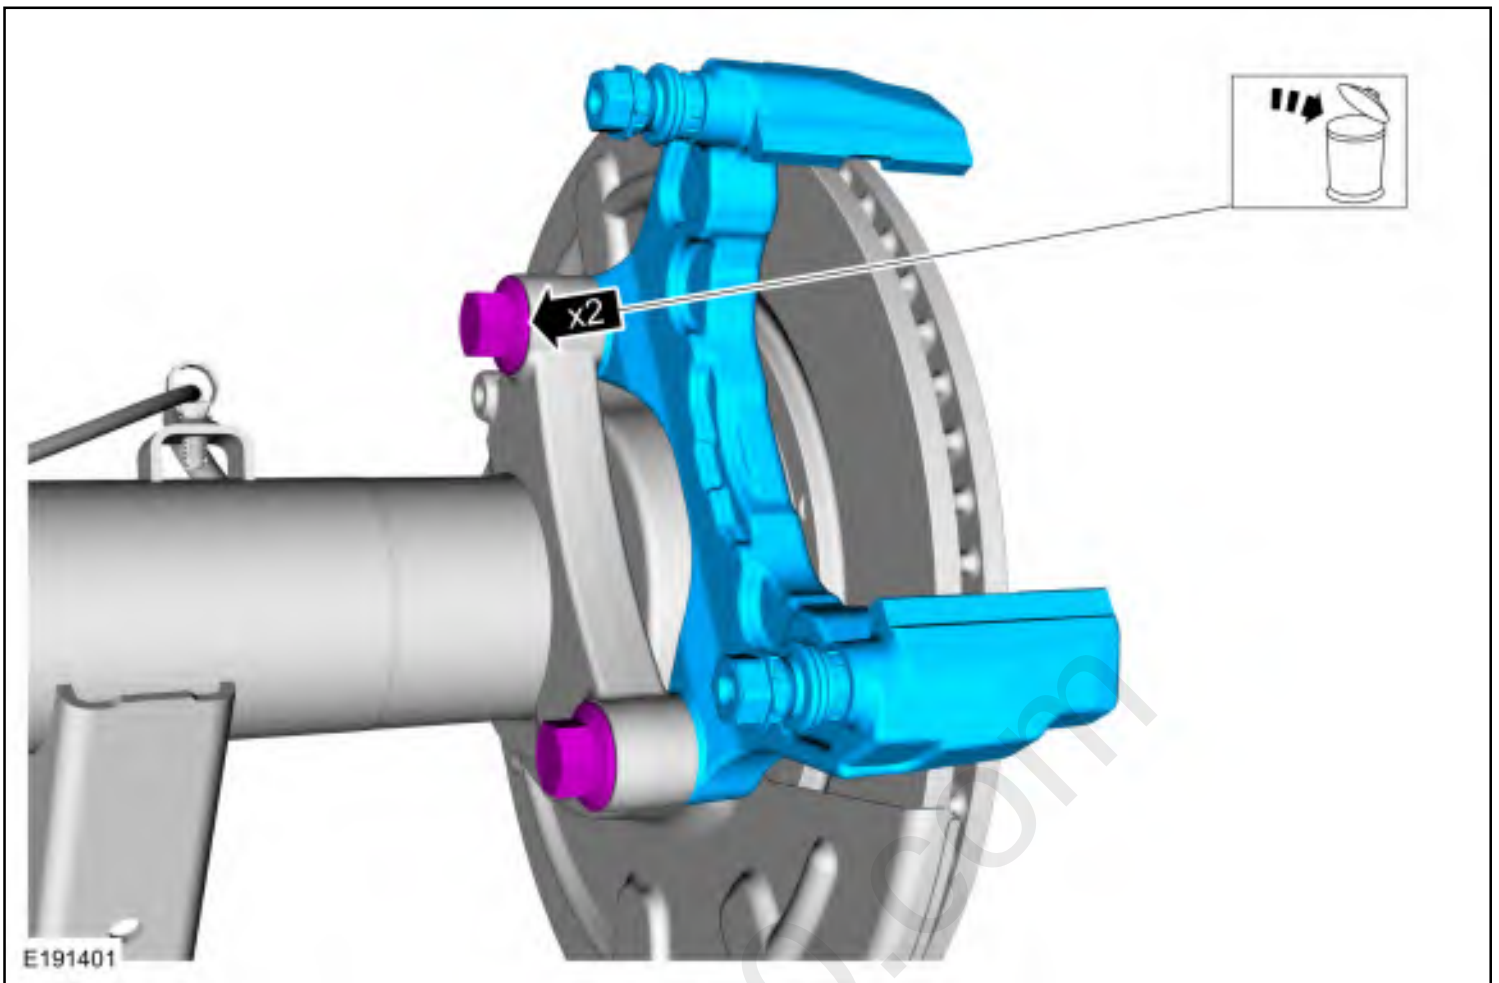


4. Type 2

Remove the 2 bolts and the anchor plate. Discard the bolts

Torque:

M18 Bolt :: 258 lb.ft (350 Nm)

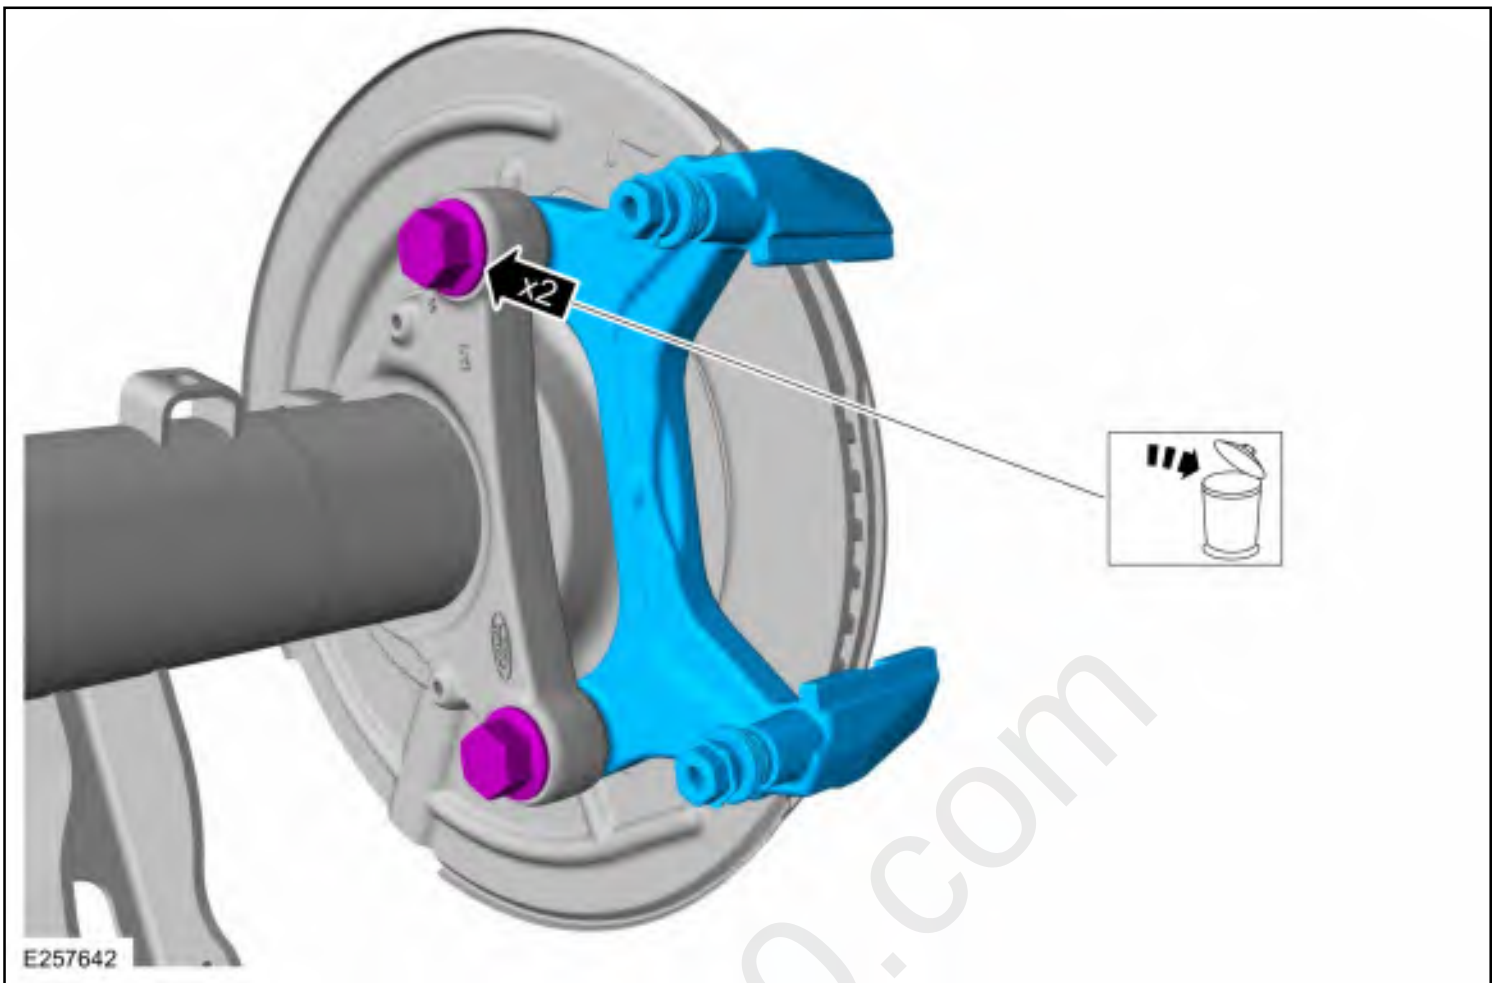

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company