

Parking Brake Shoes

Materials

Name	Specification
Motorcraft® Silicone Brake Caliper Grease and Dielectric Compound XG-3-A	ESE-M1C171-A


Removal

NOTE: Axle shaft removed from illustrations for clarity.


1. Remove the brake disc.

Refer to: [Brake Disc - Vehicles Without: Electronic Parking Brake \(EPB\)](#) (206-04 Rear Disc Brake, Removal and Installation).


1. Remove the spring.
2. Remove the parking brake shoe adjuster.

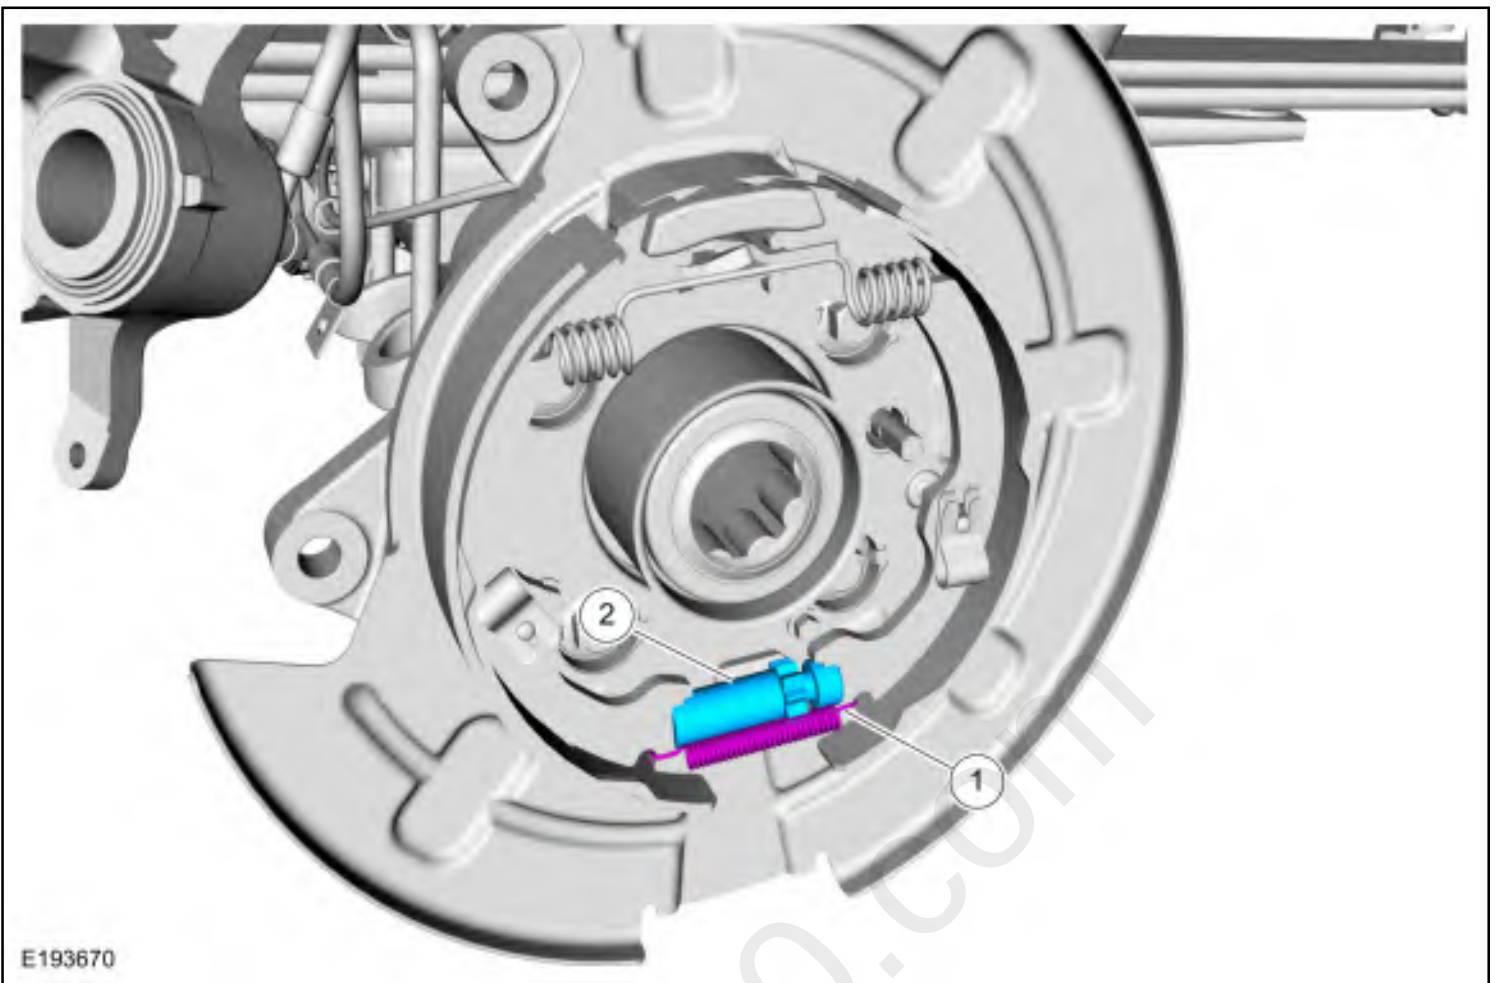

3. Remove the 2 parking brake shoe hold down springs and pins.

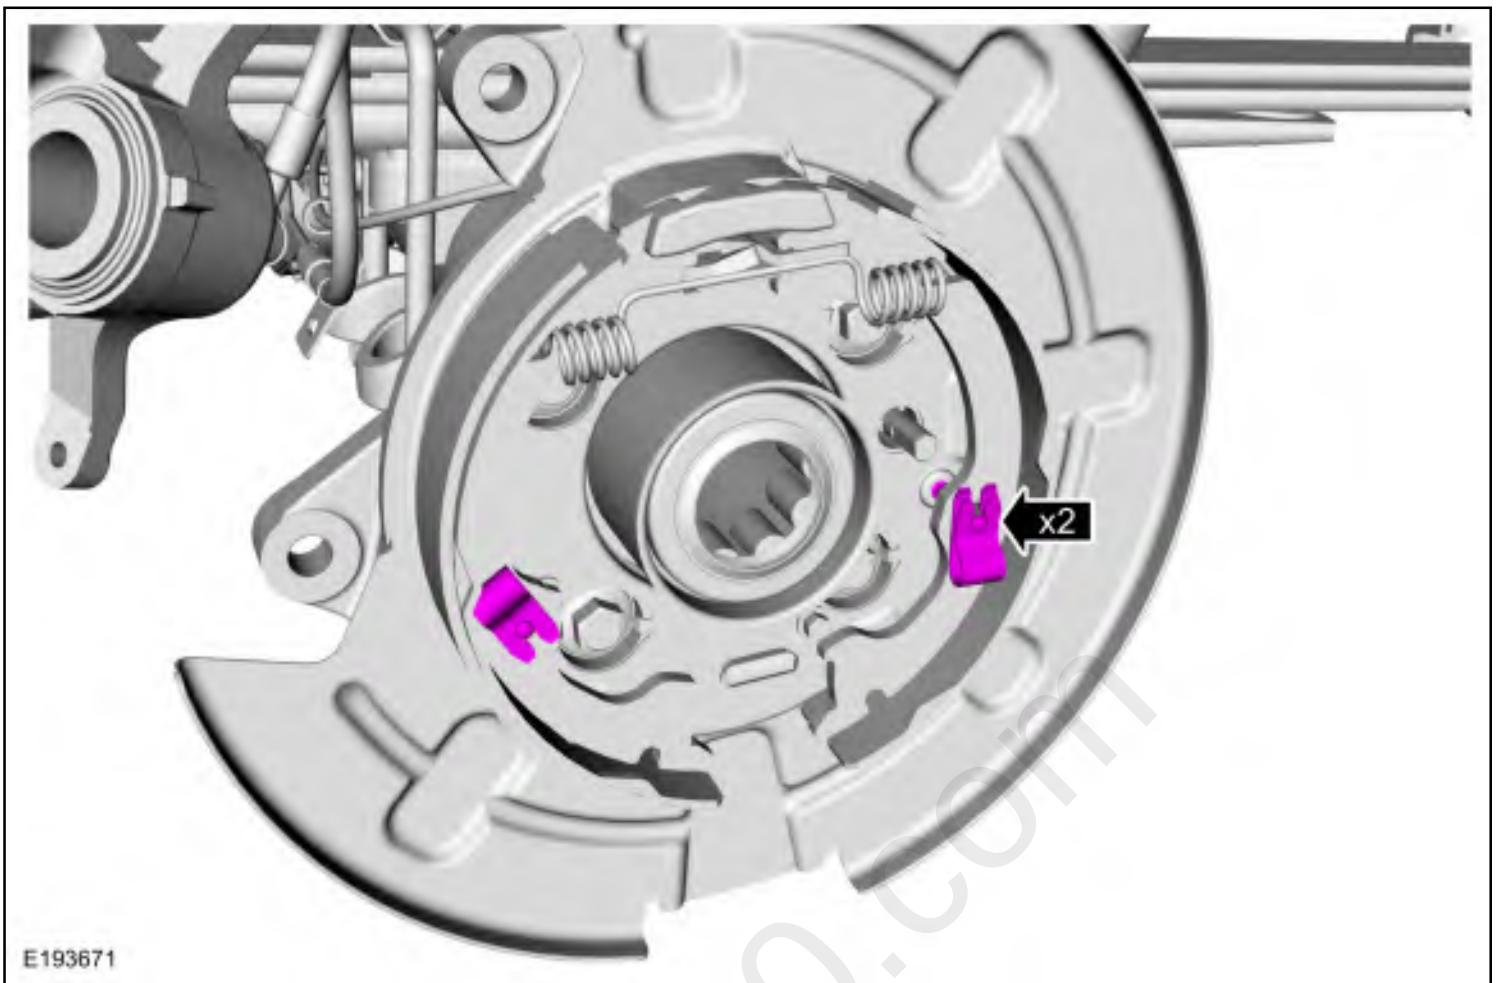


4. Remove the spring and the parking brake shoes.

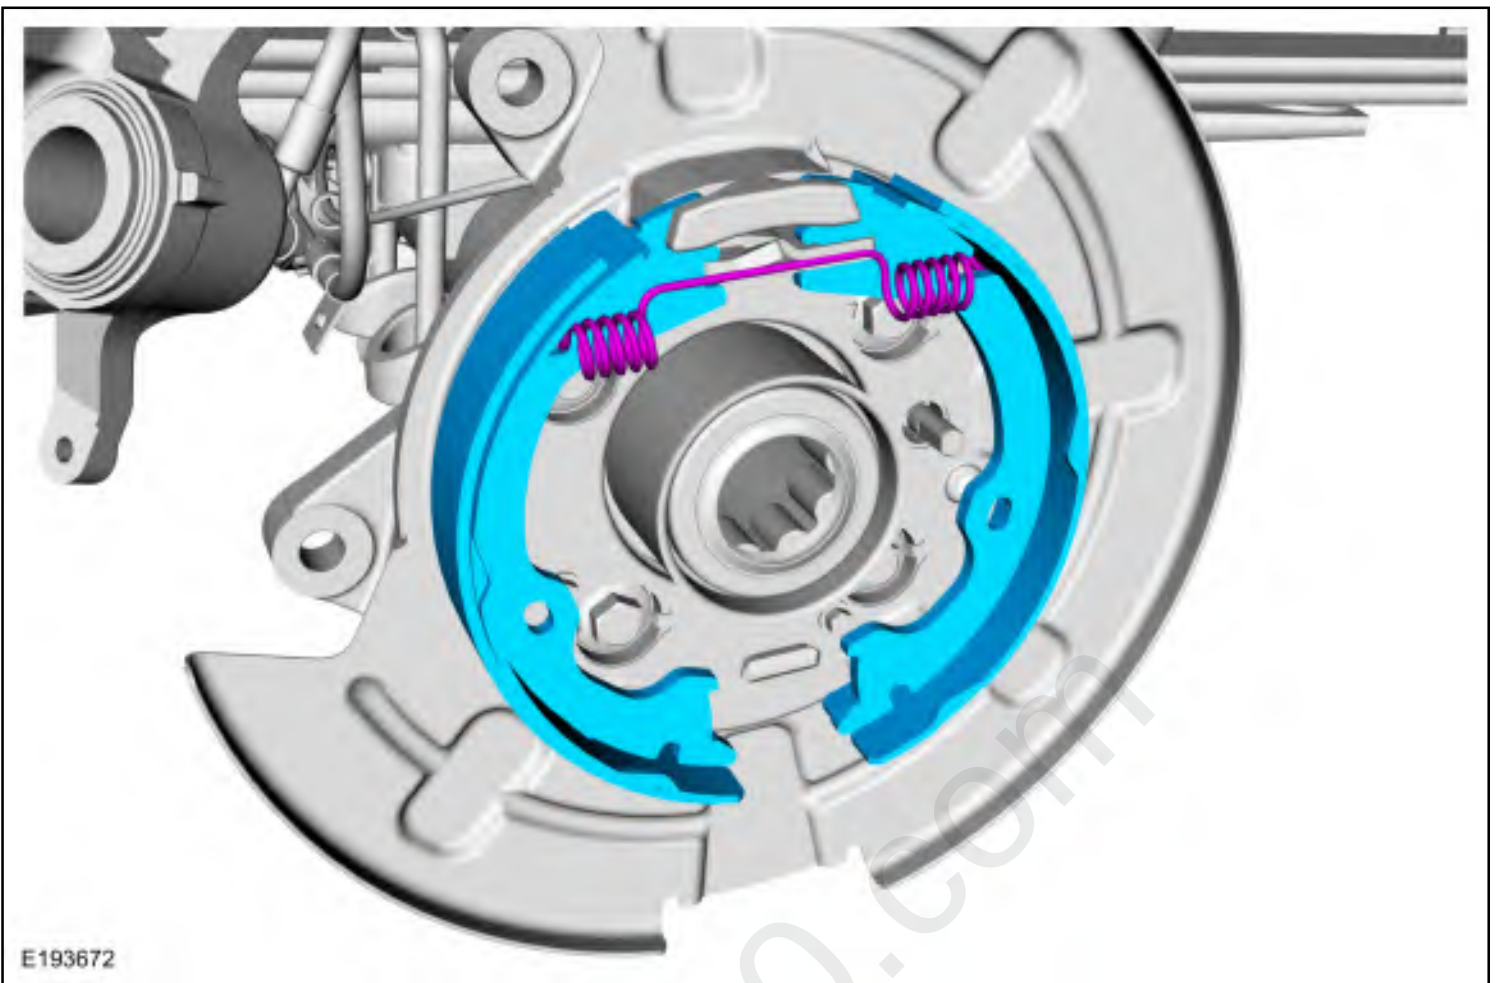

5. Using specified grease, lubricate the parking brake shoe, actuator lever and the support bracket contact points.

Material: Motorcraft® Silicone Brake Caliper Grease and Dielectric Compound / XG-3-A (ESE-M1C171-A)

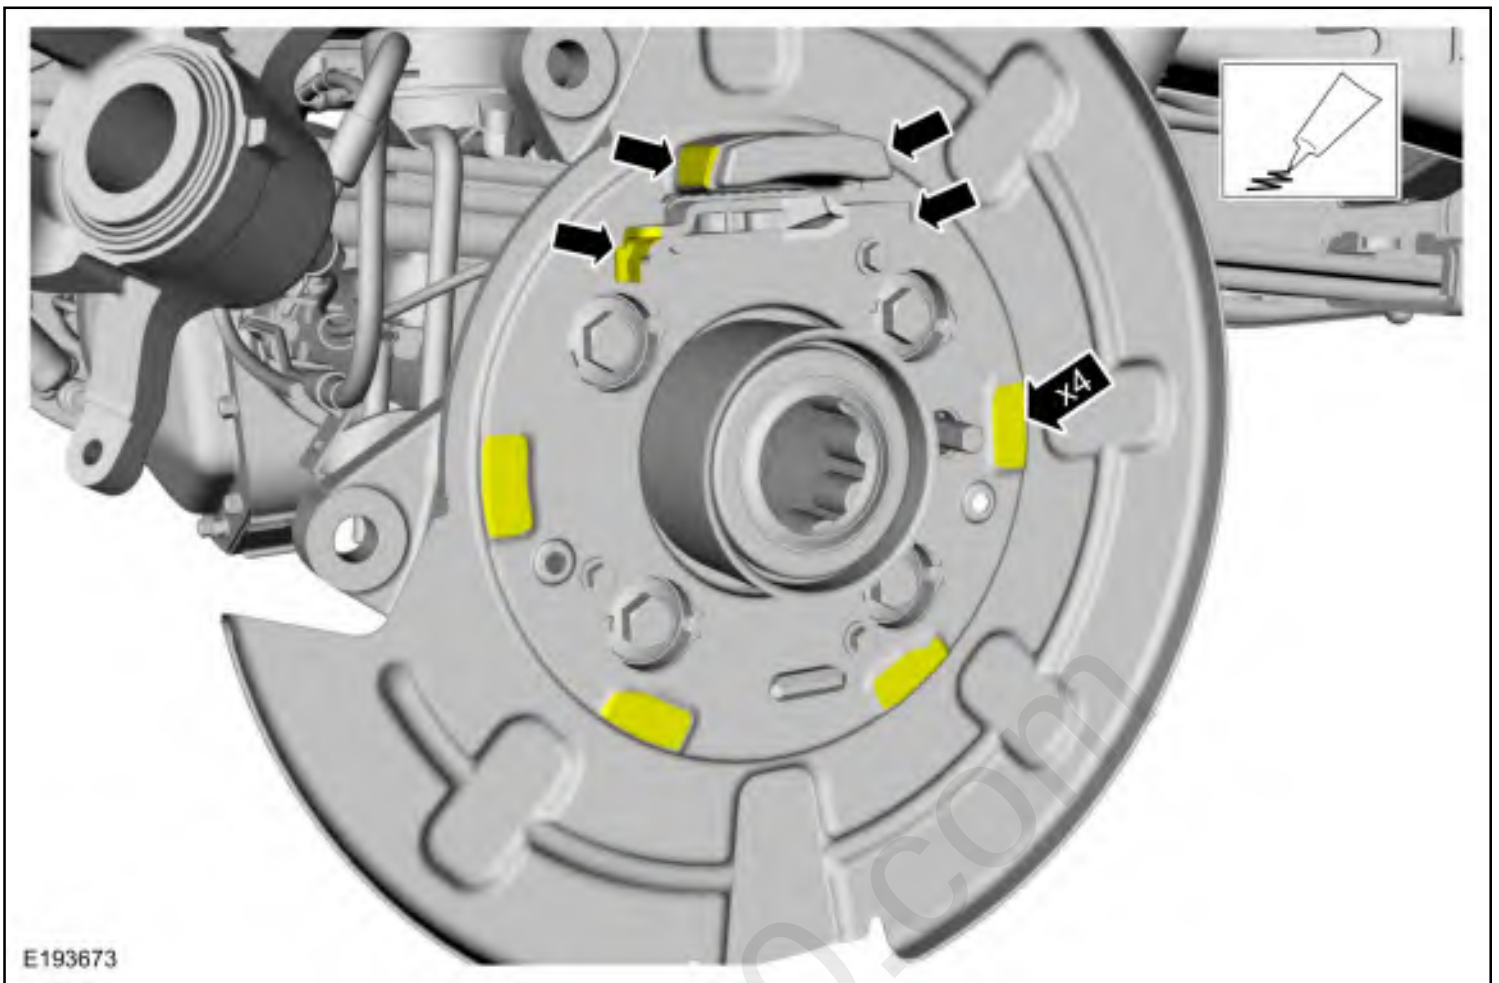

Installation

1. **NOTE:** *Completely retract the parking brake shoe adjuster before installation.*

To install, reverse the removal procedure.

2. Adjust the parking brake shoes.
Refer to: [Parking Brake Shoe Adjustment](#) (206-05A Parking Brake and Actuation, General Procedures).