

Removal and Installation

Procedure revision date:
05/29/2015

Air Cleaner

Removal

NOTE: Removal steps in this procedure may contain installation details.


- Loosen the clamp and position aside the air cleaner outlet pipe. Remove the bolt and the push pin retainers from the air cleaner assembly.

Torque:

Clamp.: 36 lb.in (4.1 Nm)

Bolt.: 155 lb.in (17.5 Nm)

- Remove the air cleaner assembly.

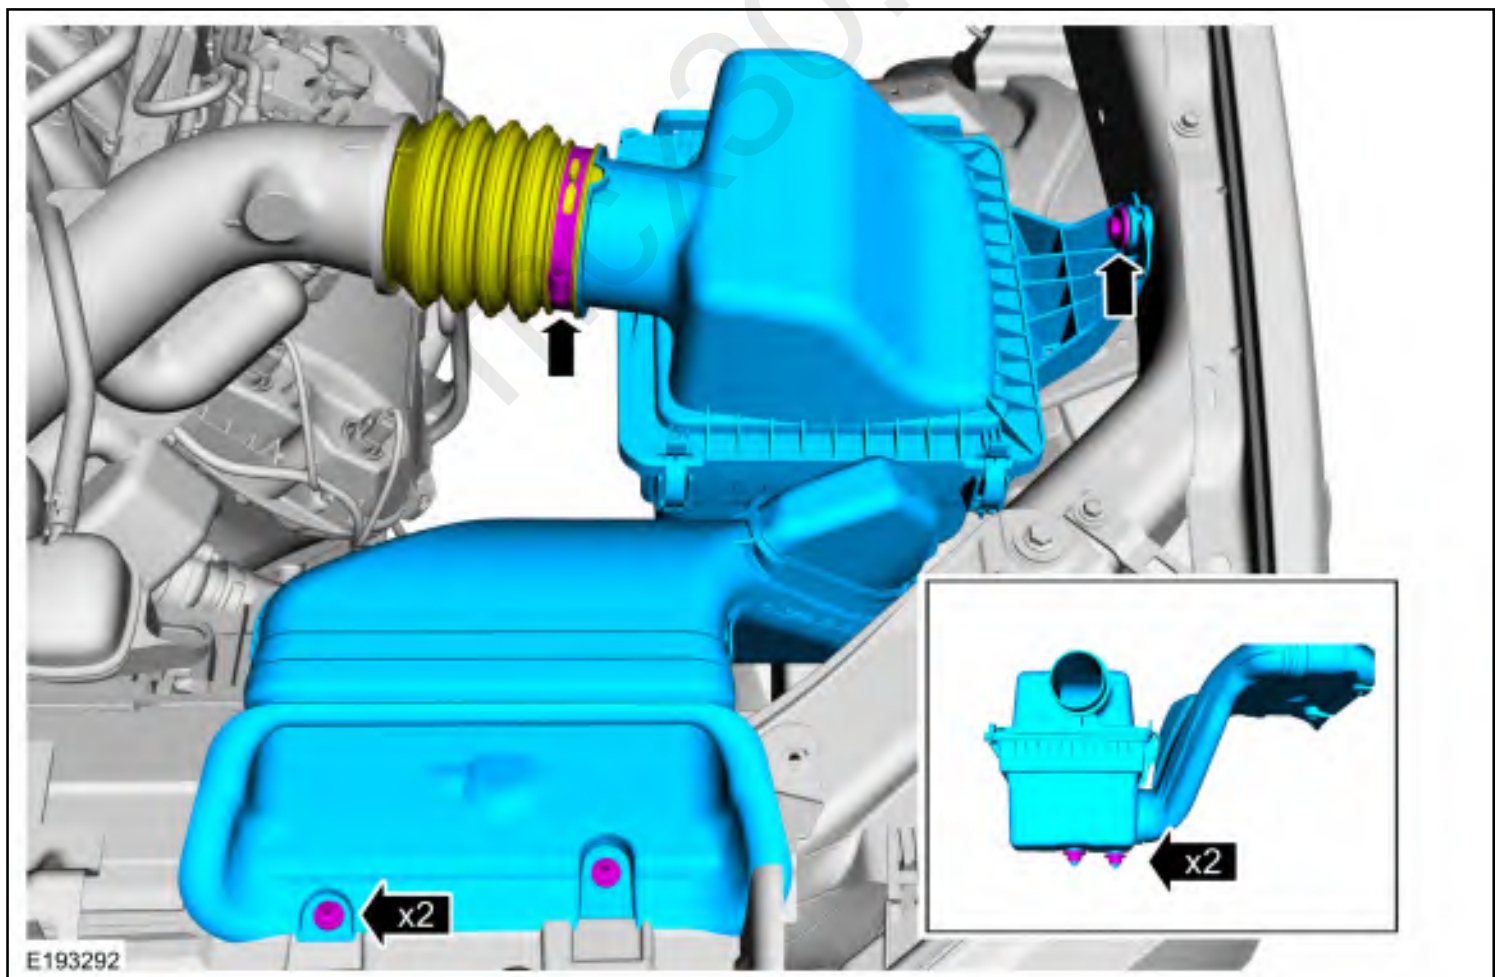

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company

mcx30.com