


Air Cleaner Outlet Pipe

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Position aside the coolant tube. Disconnect and position aside the brake booster tube and the crankcase ventilation tube. Loosen the 2 clamps and remove the air cleaner outlet pipe.
Torque: 36 lb.in (4.1 Nm)

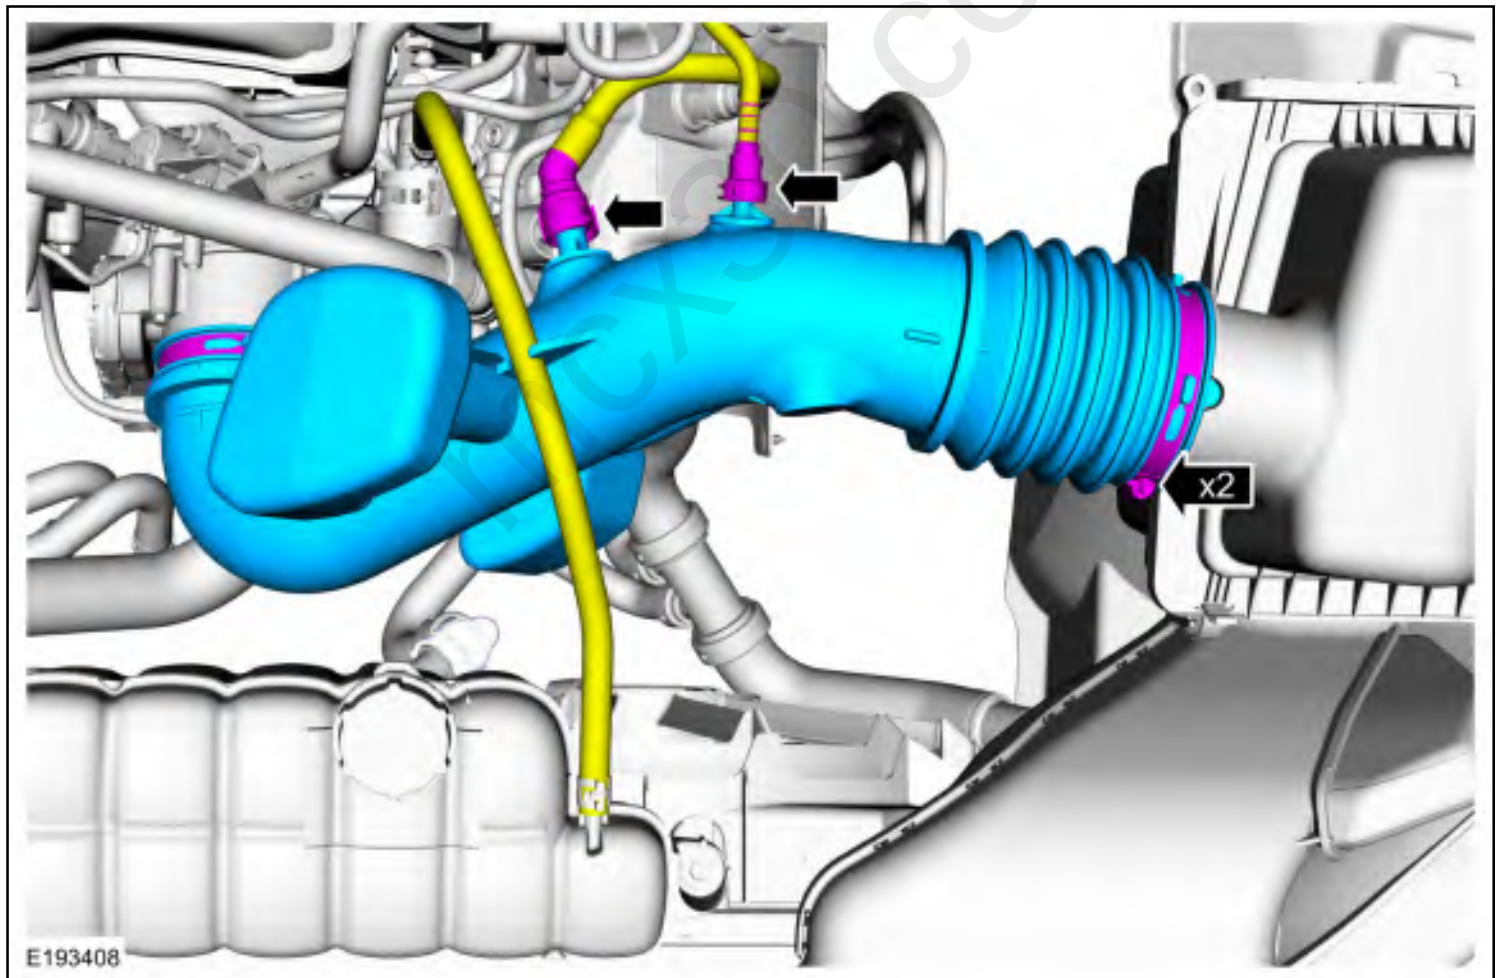

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company

mcx30.com