


Intake Manifold Runner Control (IMRC) Solenoid

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the intake manifold.
Refer to: [Intake Manifold](#) (303-01D Engine - 5.0L 32V Ti-VCT, Removal and Installation).
2. Disconnect the hoses and remove the IMRC solenoid.
Torque: 35 lb.in (4 Nm)

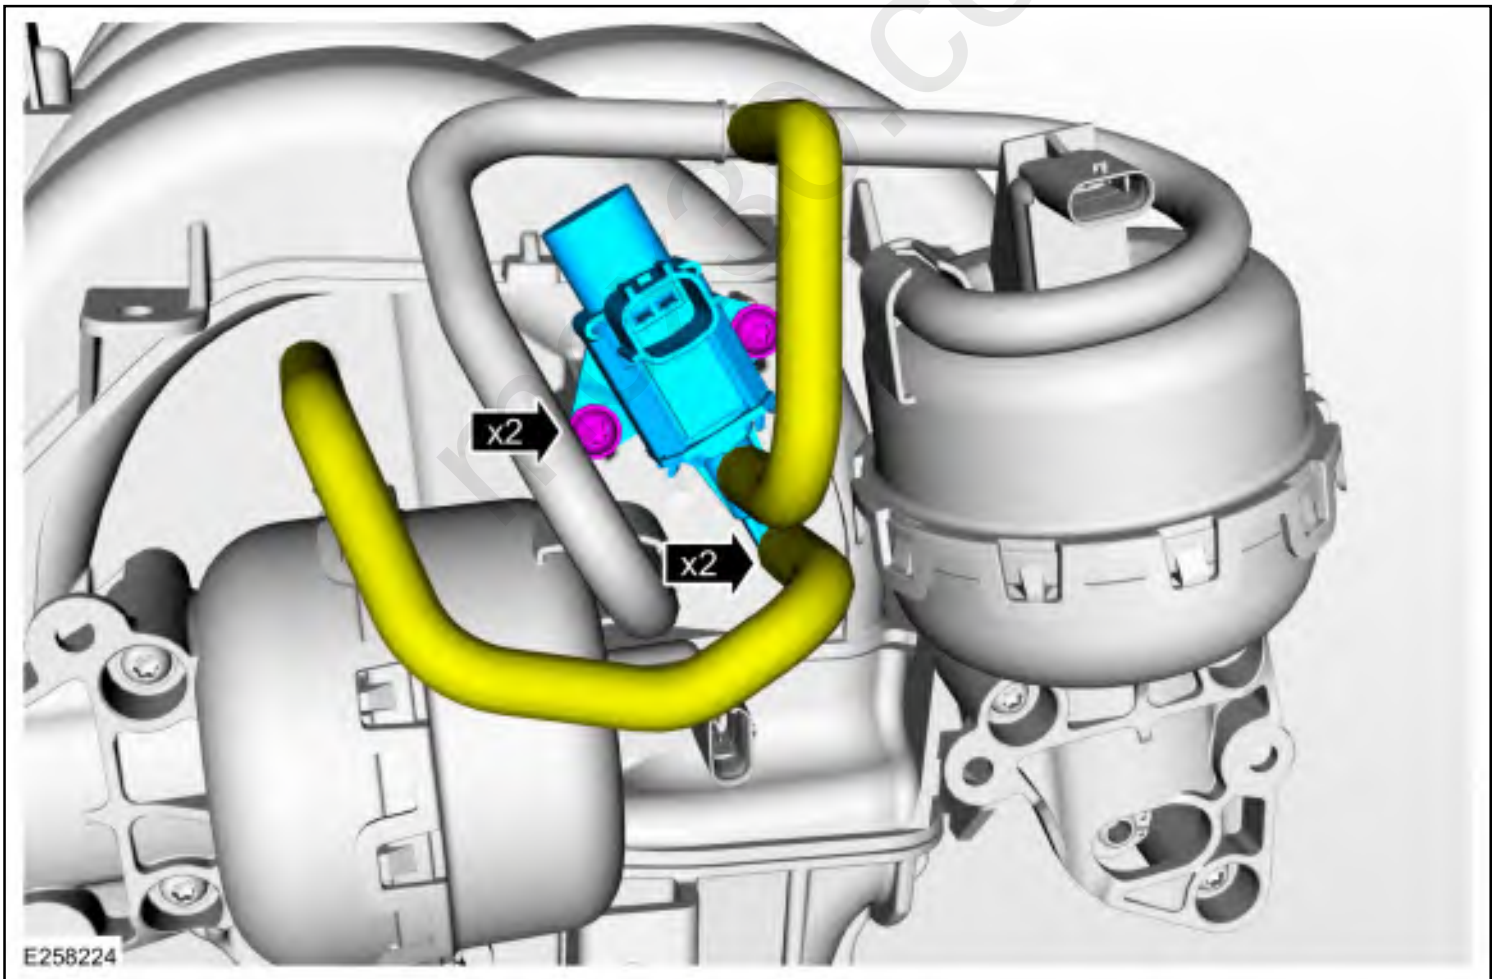

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company

mcx30.com