


Driver Side Footwell Air Discharge Temperature Sensor

Base Part Number: Base Part Number: 19C734

Removal

1. Remove the climate control housing.
Refer to: Climate Control Housing (412-00) .
2. Disconnect the electrical connector and remove the driver side footwell air discharge temperature sensor.

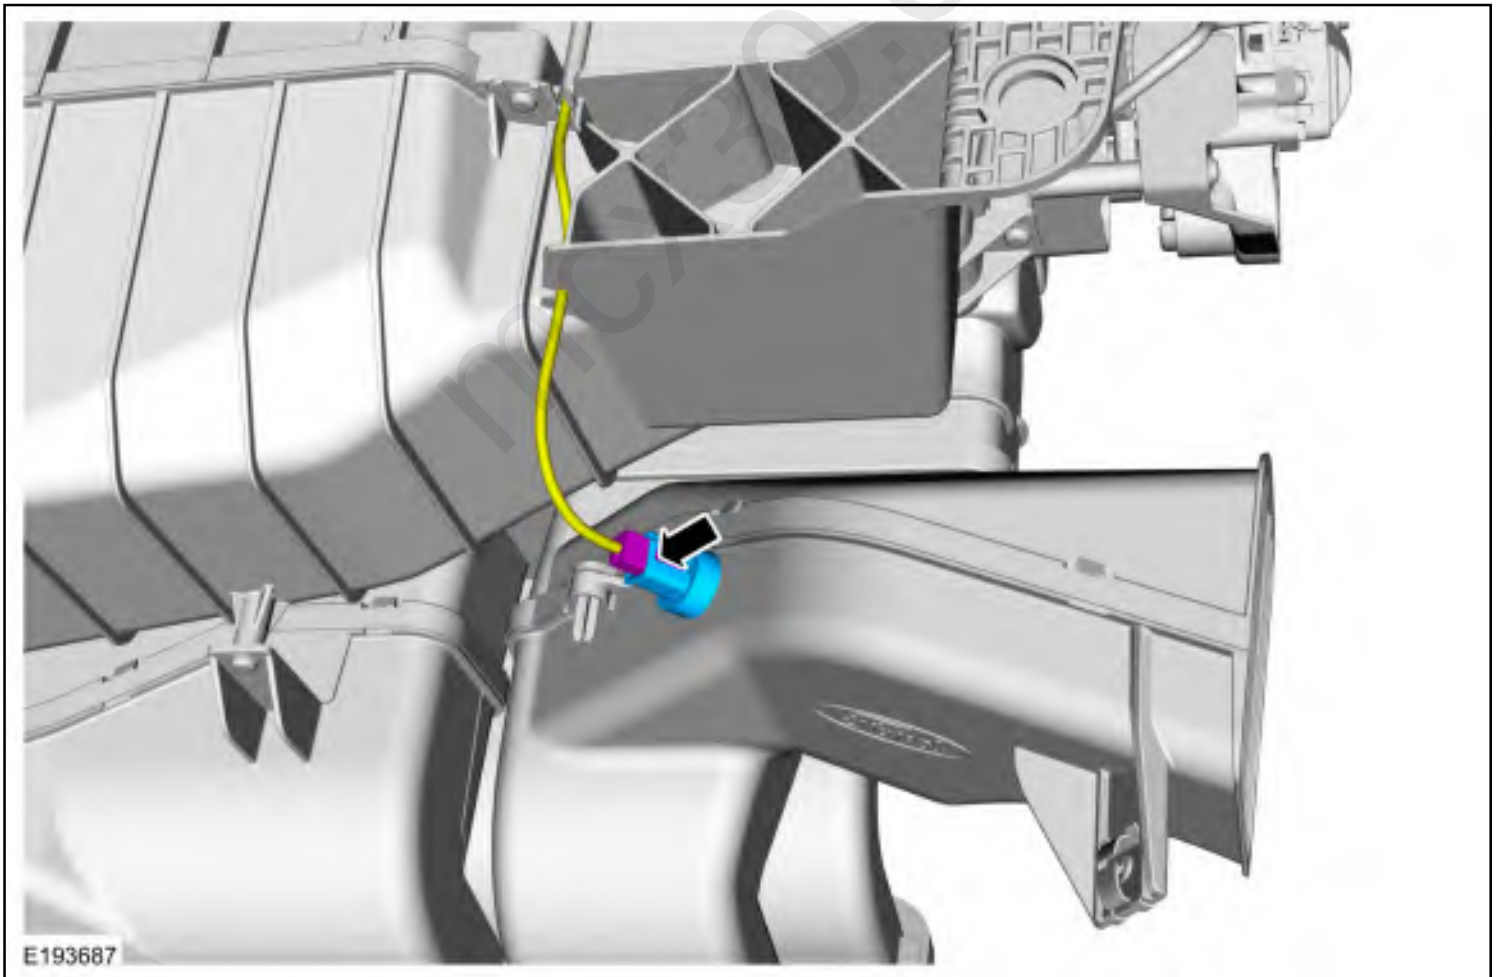

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company

mcx30.com

Driver Side Register Air Discharge Temperature Sensor

Base Part Number: Base Part Number: 19C734


Special Tool(s) / General Equipment

Interior Trim Remover

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. If equipped, release the clips and remove the instrument panel speaker grille.
Use the General Equipment: Interior Trim Remover

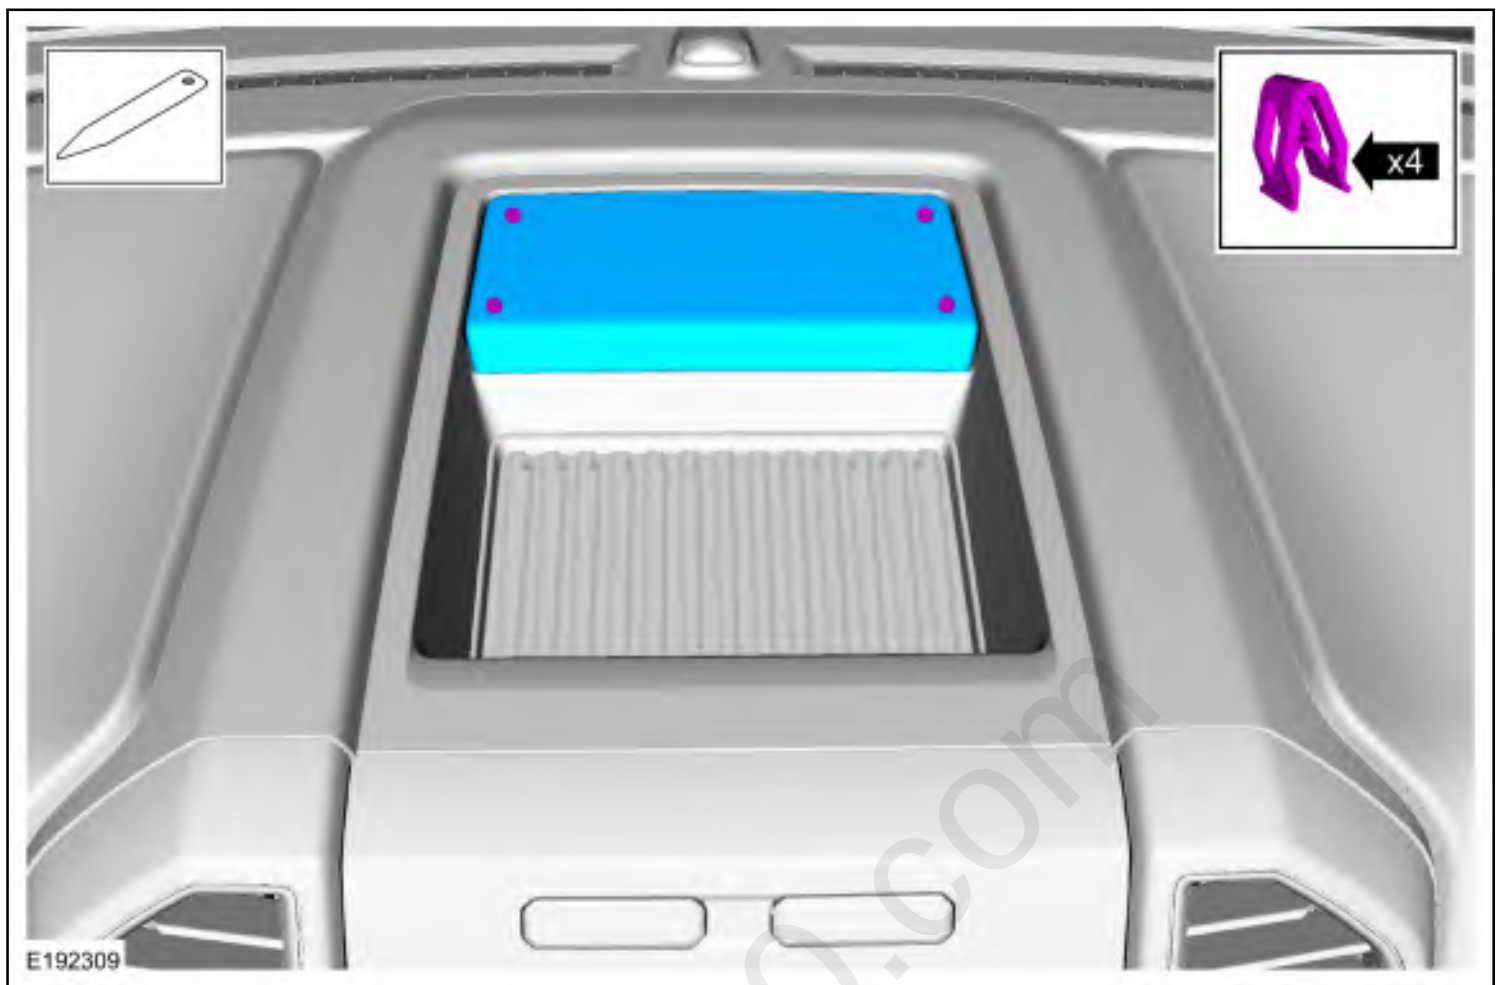


2. **NOTE:** Vehicle with speaker shown, without speaker similar.


Remove the bolts, release the clips and remove the instrument panel center upper trim panel.
Disconnect the electrical connector.

Use the General Equipment: Interior Trim Remover

Torque: 18 lb.in (2 Nm)

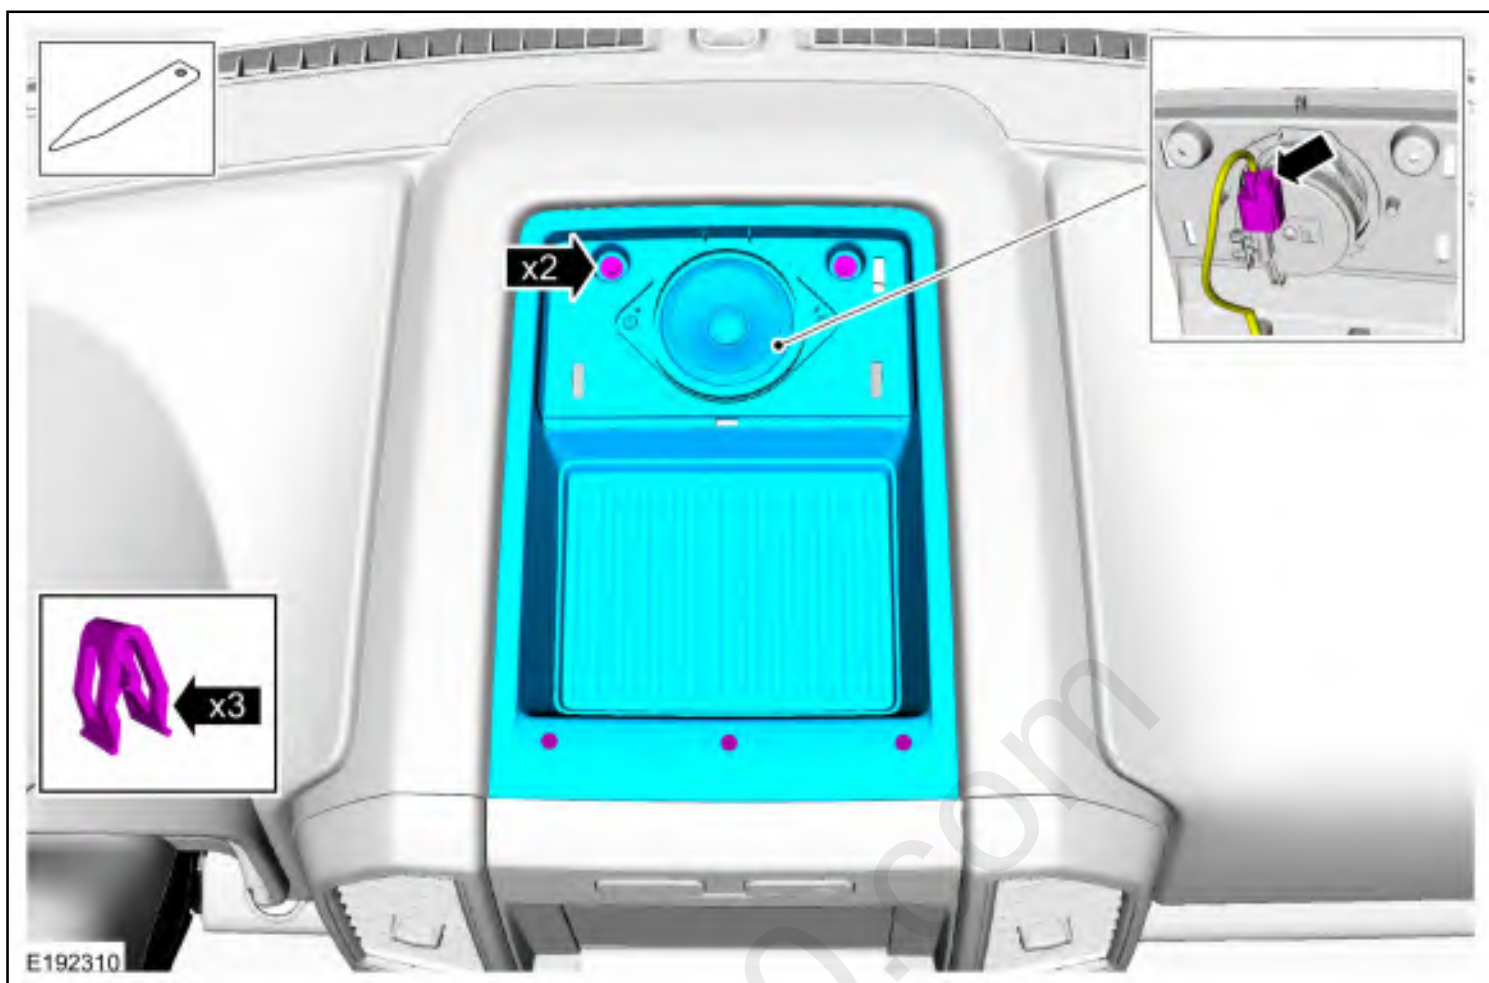

3. Disconnect the electrical connector and remove the driver side register air discharge temperature sensor.

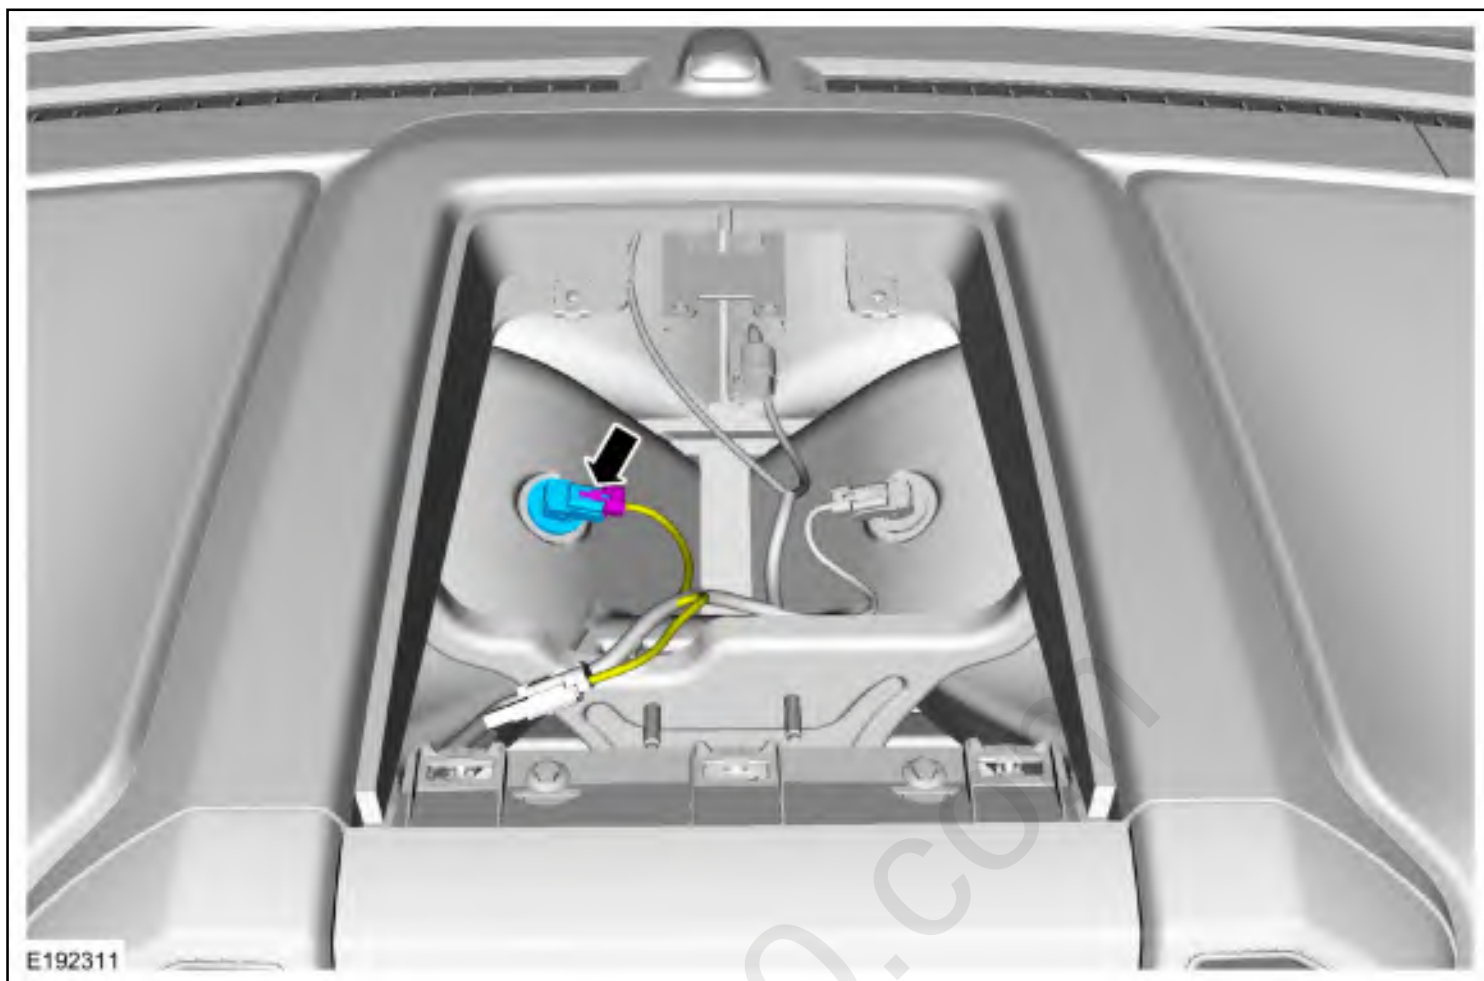

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company
