


Satellite Radio Antenna Cable


Removal

Upper satellite radio antenna cable


1. Lower the headliner.
Refer to: [Headliner - Lowering - Regular Cab](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).
Refer to: [Headliner - Lowering - SuperCab](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).
Refer to: [Headliner - Lowering - SuperCrew](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).
2. Disconnect the electrical connector, release the retainers and position aside the upper satellite radio antenna cable following the routing shown.

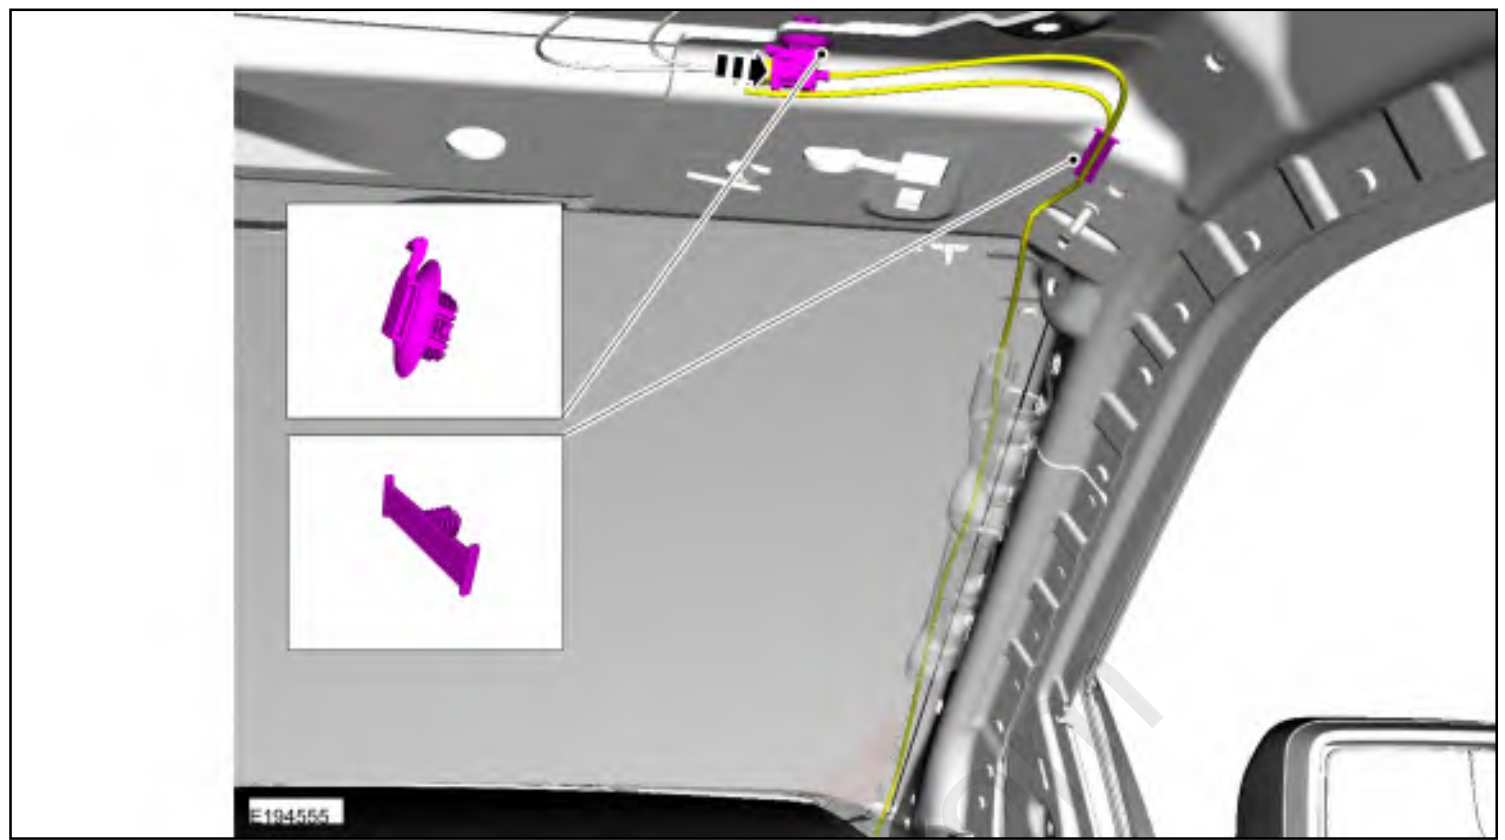

3. Fully lower the glove compartment.

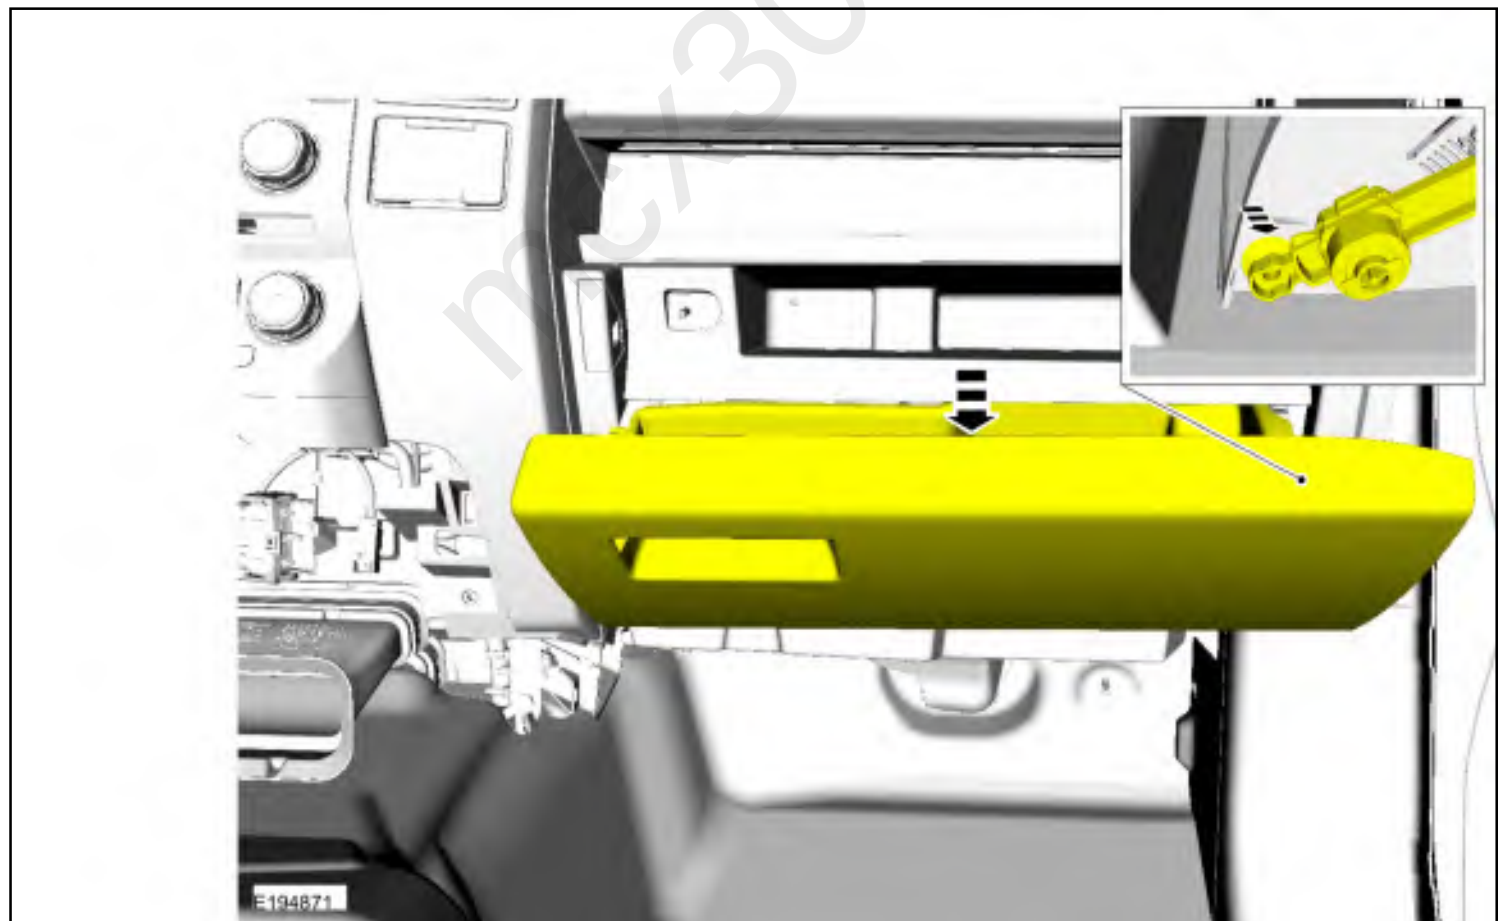


4. Disconnect the antenna cable, release the retainers and remove the upper satellite radio antenna cable following the routing shown.

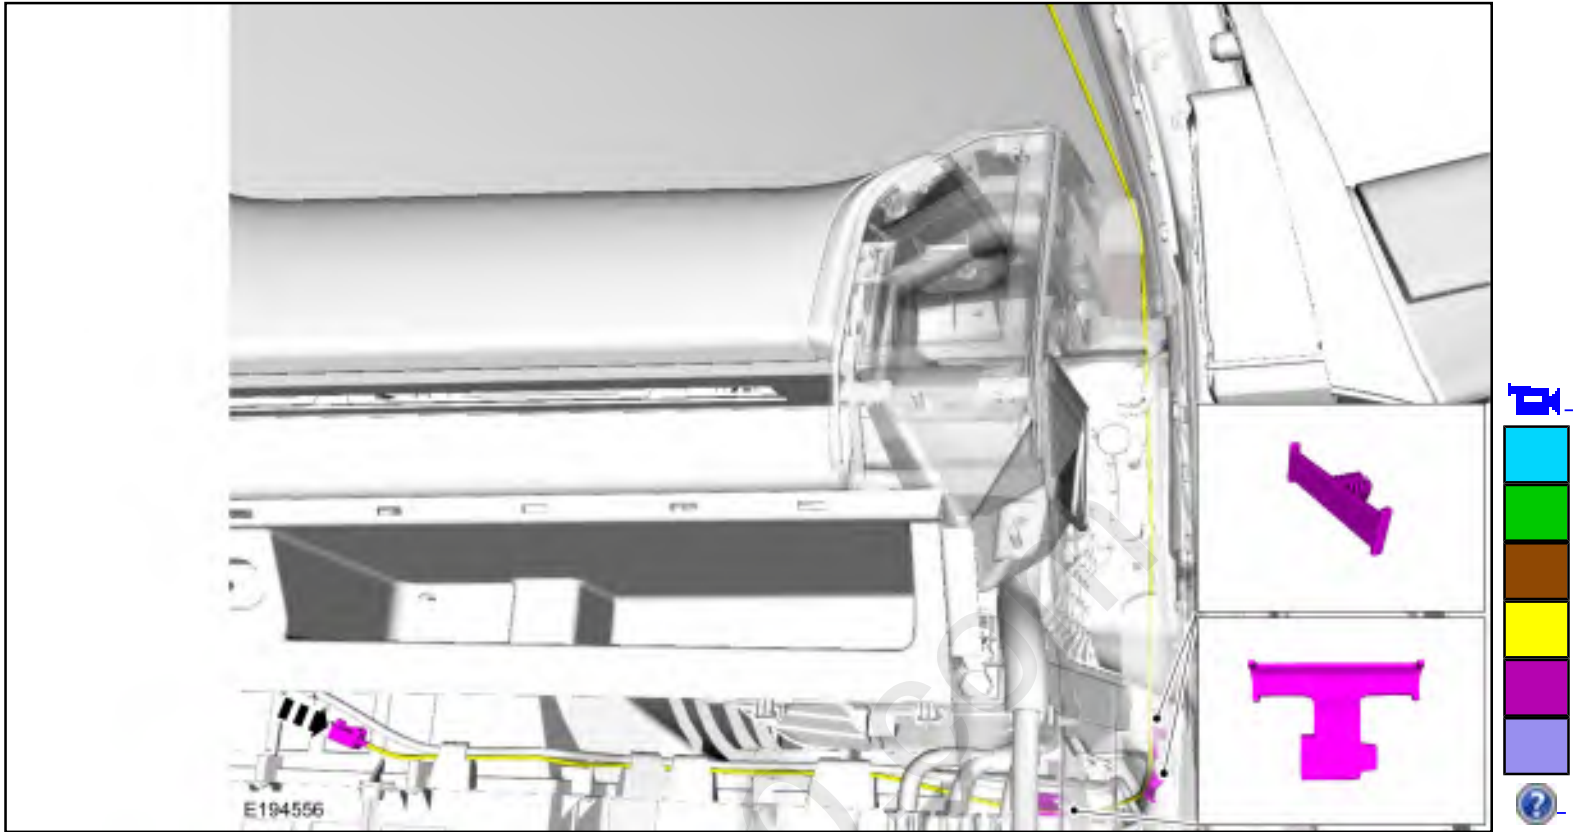


Lower satellite radio antenna cable

5. Remove the ACM.
Refer to: [Audio Front Control Module \(ACM\)](#) (415-00C Information and Entertainment System - General Information - Vehicles With: Touchscreen Display, Removal and Installation).
6. Fully lower the glove compartment.

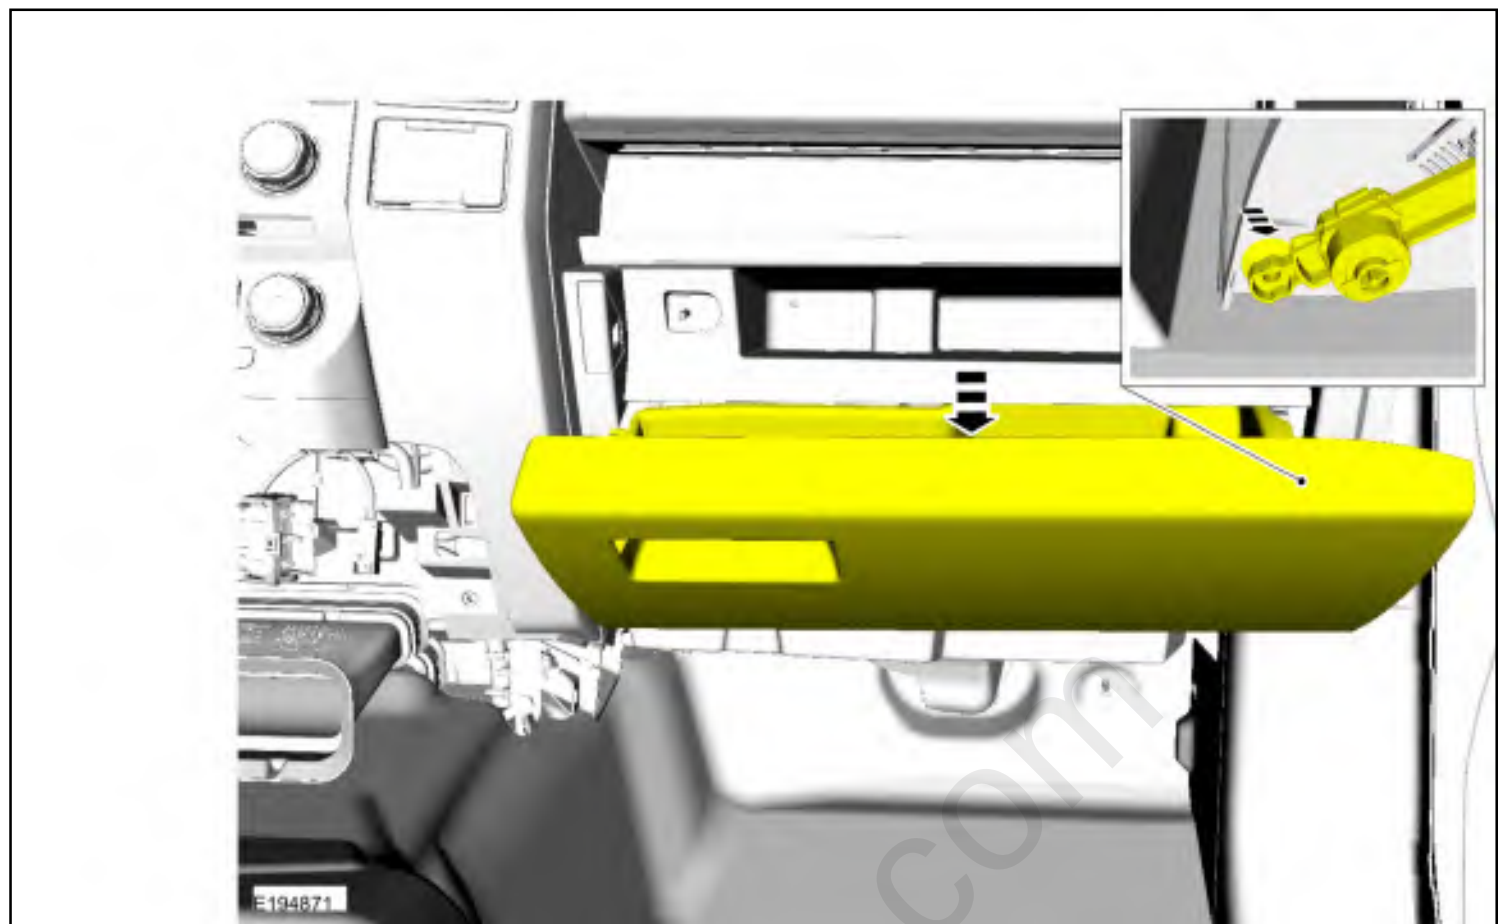

7. Disconnect the antenna cable, release the retainer and remove the lower satellite radio antenna cable following the routing shown.

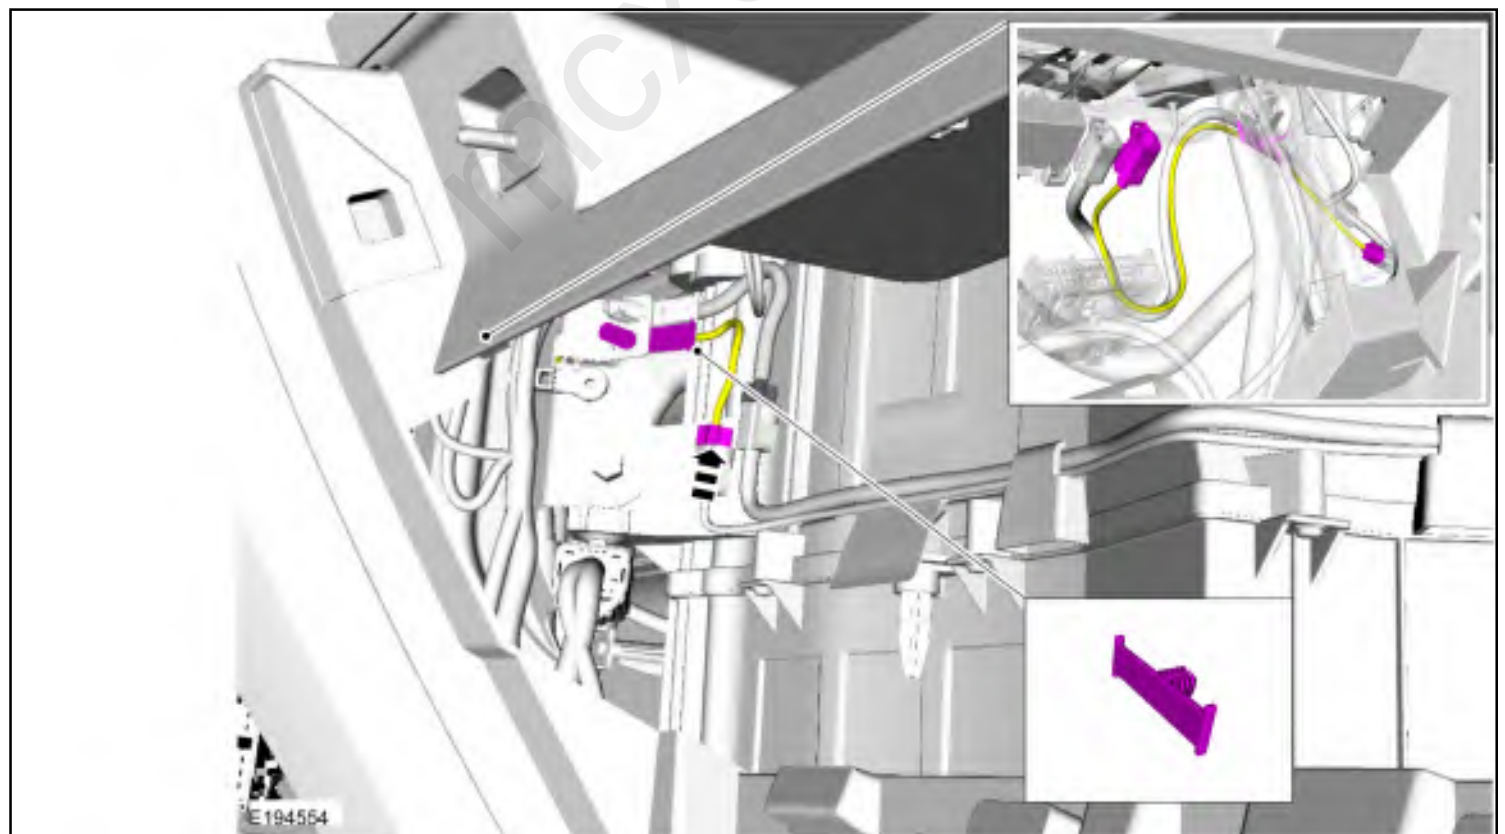

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company

mcx30.com