


Microphone

Removal


NOTE: Removal steps in this procedure may contain installation details.

Vehicles with overhead console

1. Remove the overhead console.
Refer to: [Overhead Console](#) (501-12 Instrument Panel and Console, Removal and Installation).
1. Position aside the electrical connector.
2. Remove the screws and the cover.

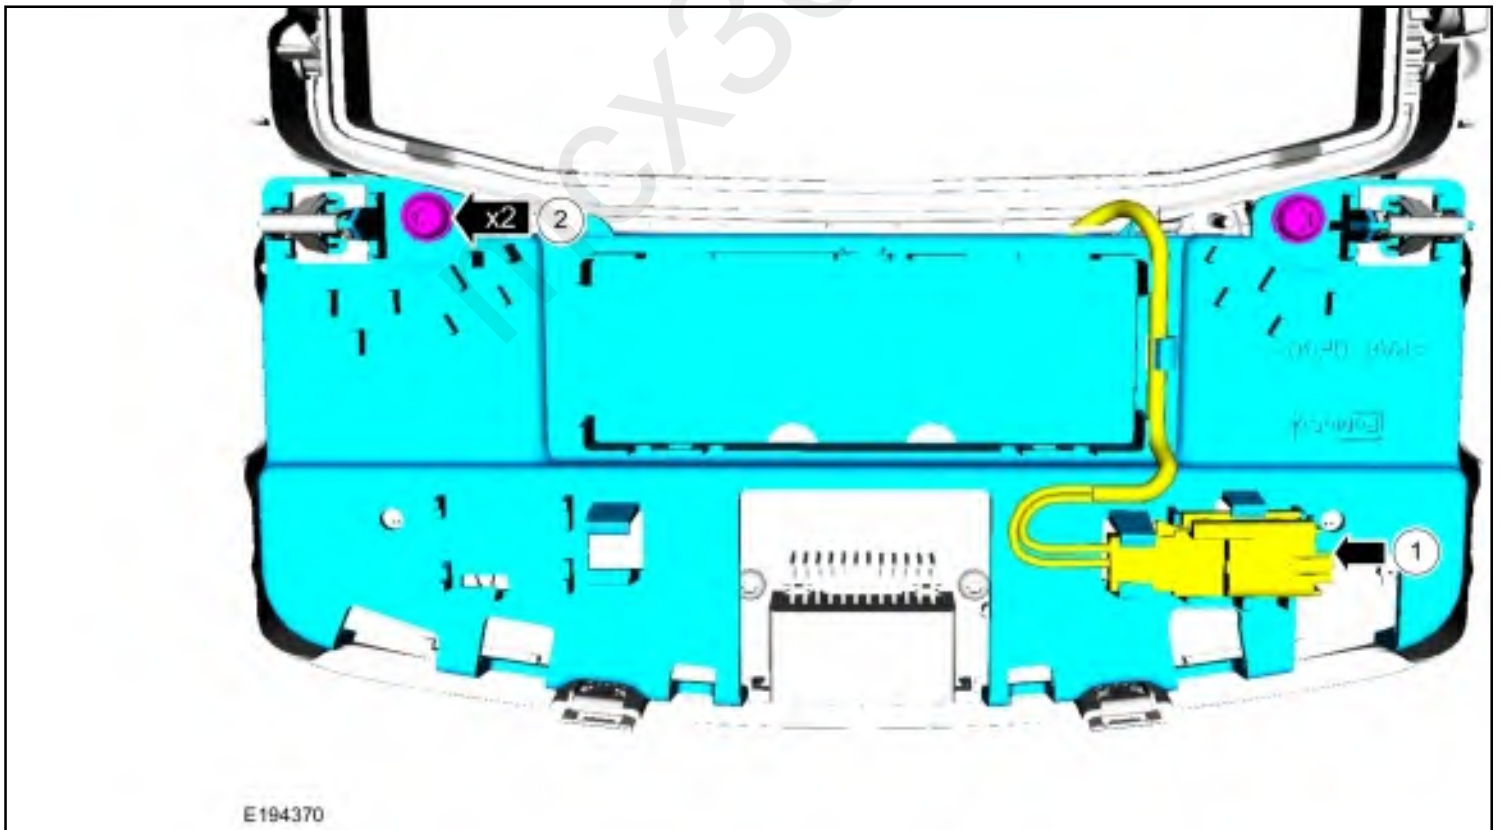


3. Release the tabs and remove the microphone.

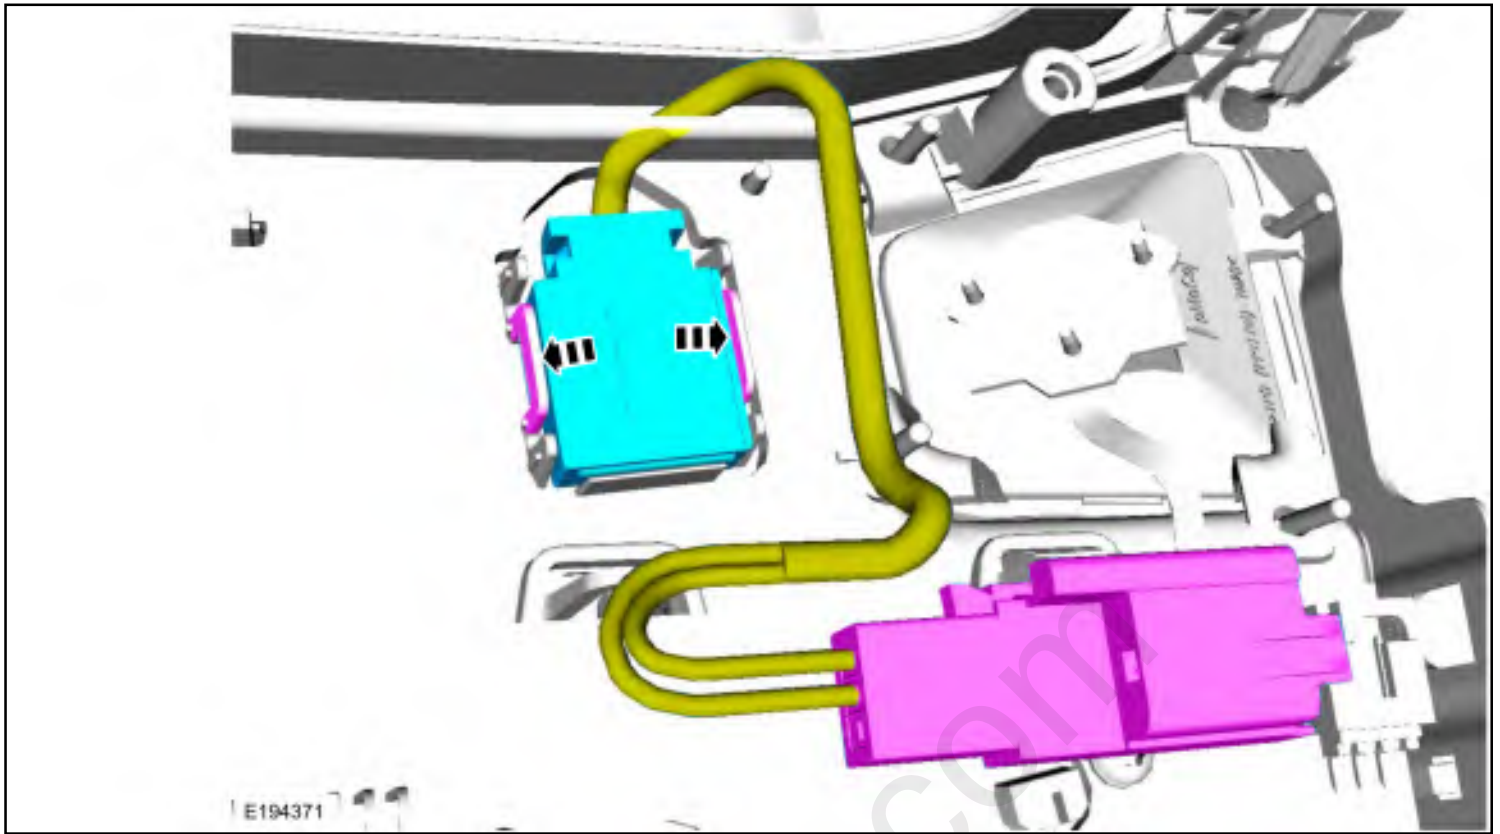

Vehicles with out overhead console

4. Remove the microphone from the headliner.
 1. Carefully break the glue loose holding the microphone harness to the headliner.
 2. Pull the harness out until the microphone connector can be accessed and disconnect the electrical connector.

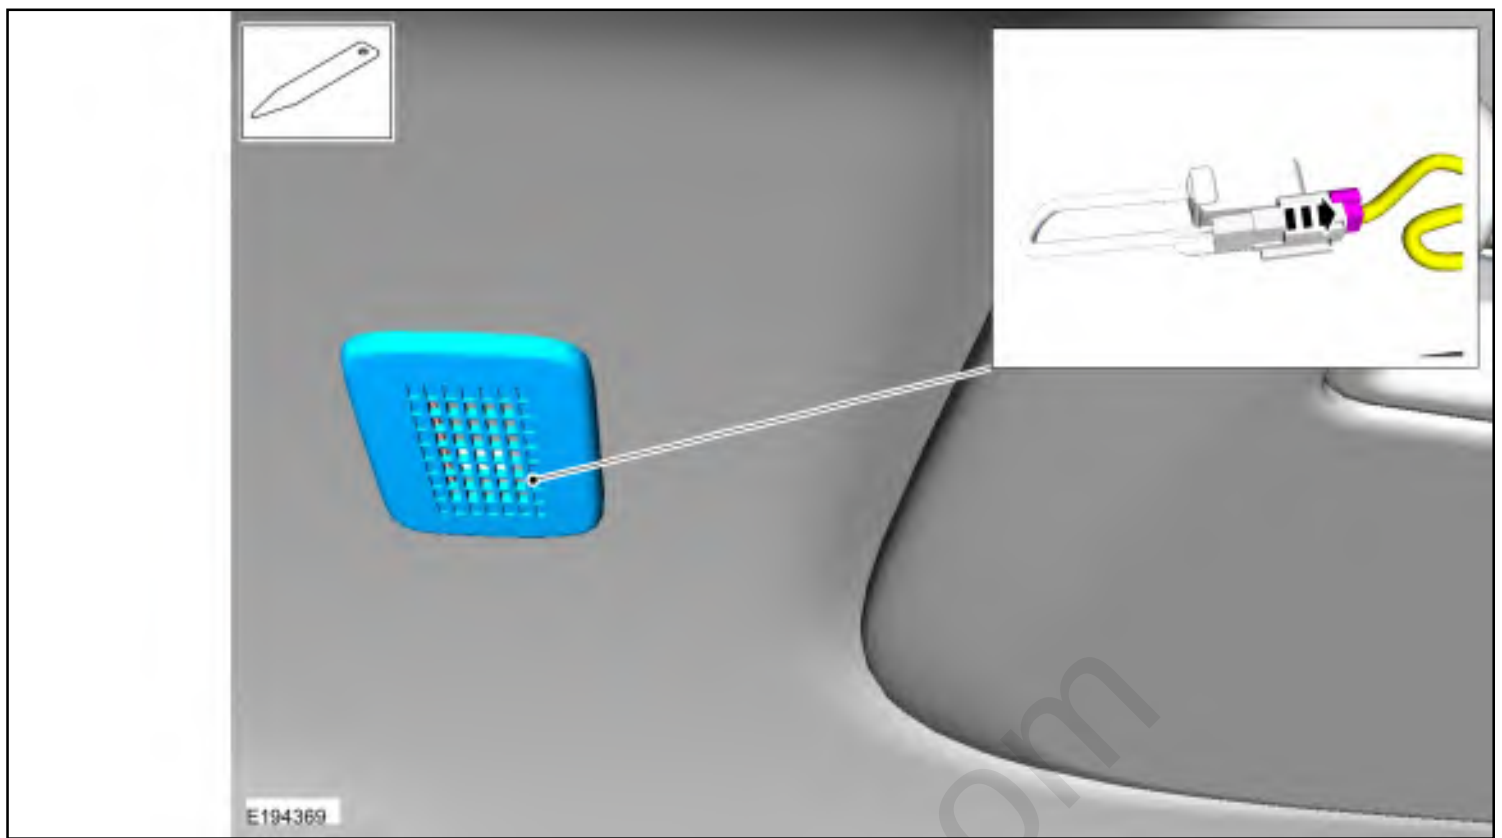

Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company