



Removal

1. Remove the floor console.
Refer to: [Floor Console](#) (501-12 Instrument Panel and Console, Removal and Installation).
2. Remove the screws, detach the wiring harness pin-type retainer, and remove the floor console air duct.

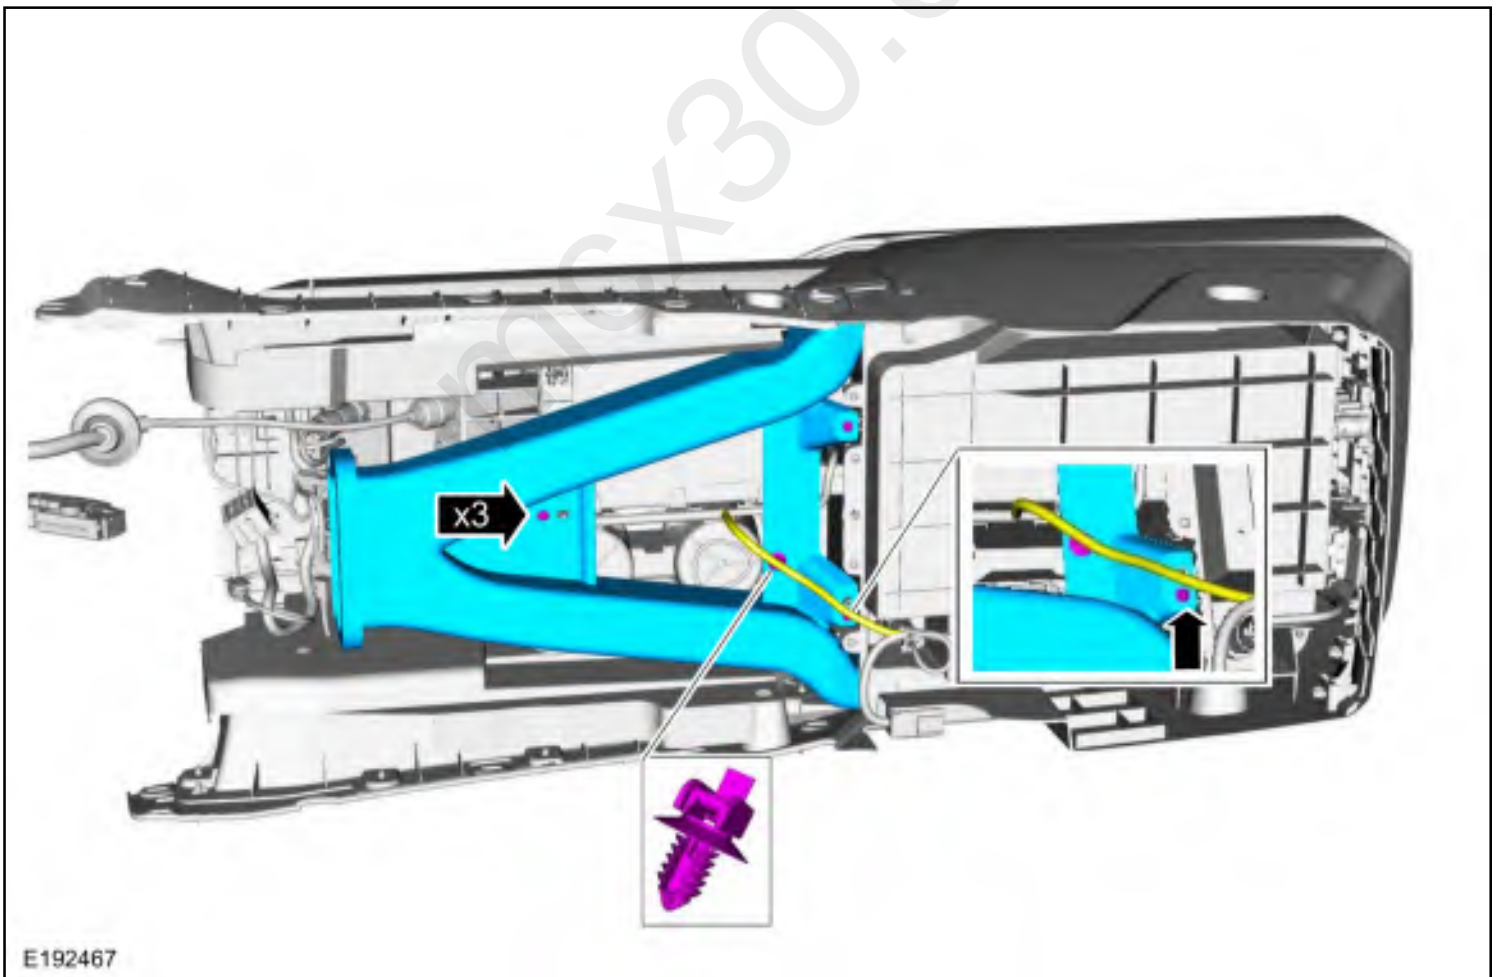

3. Remove the PATS center antenna.
 1. Disconnect the PATS center antenna electrical connector.
 2. Remove the nuts.

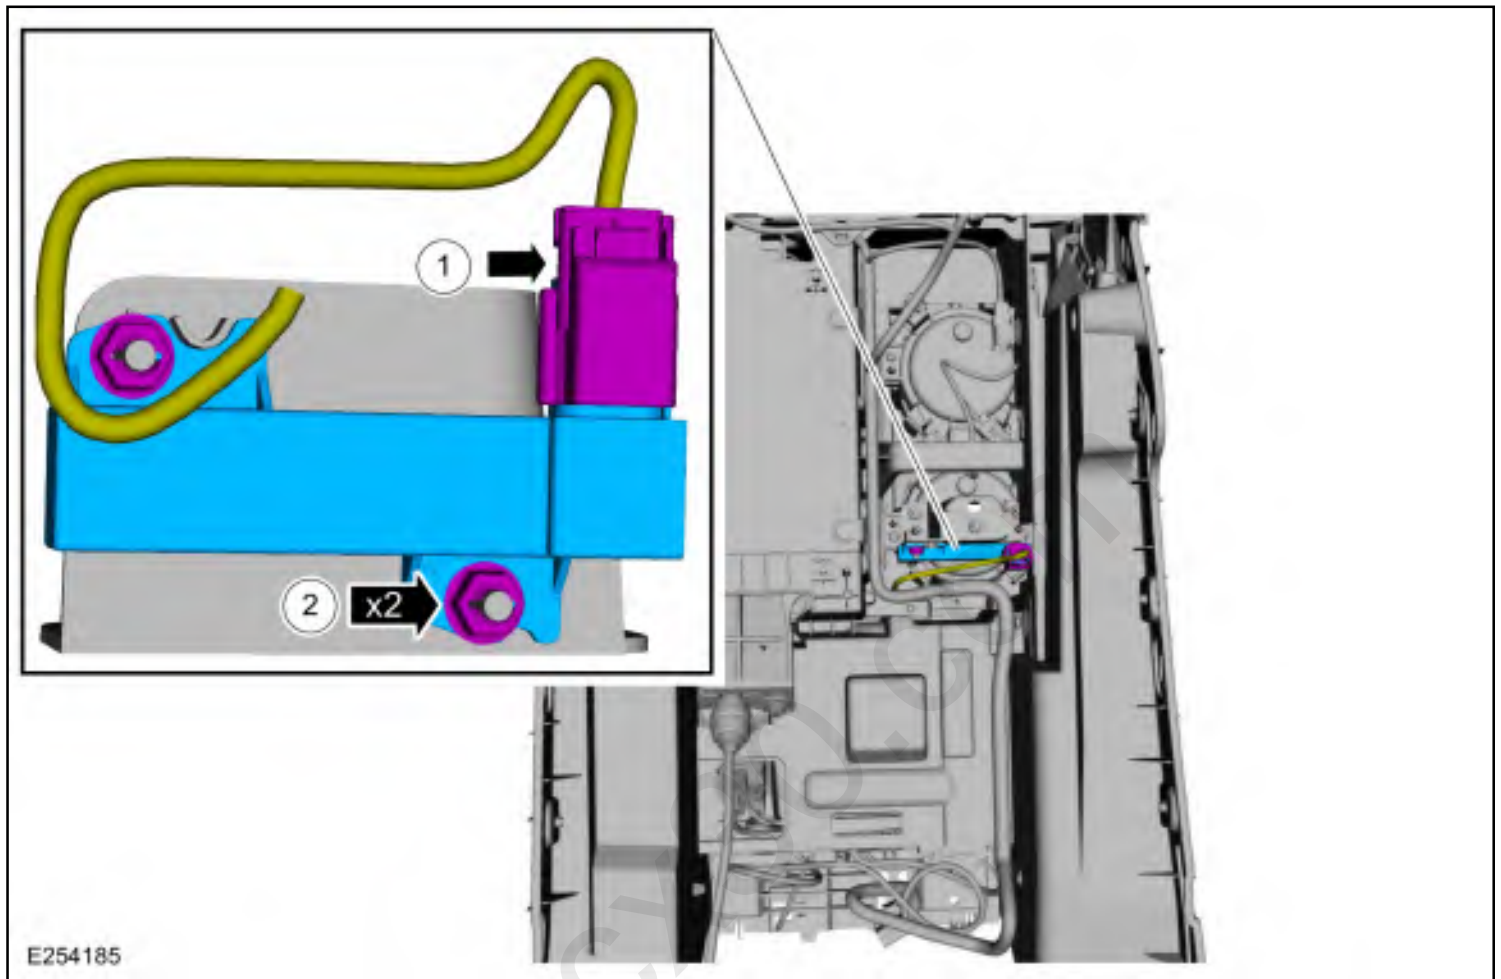

Installation

1. To install, reverse the removal procedure.