


Camshaft Position (CMP) Sensor

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the air cleaner outlet pipe.
Refer to: Air Cleaner Outlet Pipe (303-12C Intake Air Distribution and Filtering - 7.3L 2V DEVCT V8 (239kW/320PS) (J0), Removal and Installation).
2. Disconnect the electrical connector, remove the bolt and the CMP sensor.
Torque: 89 lb.in (10 Nm)

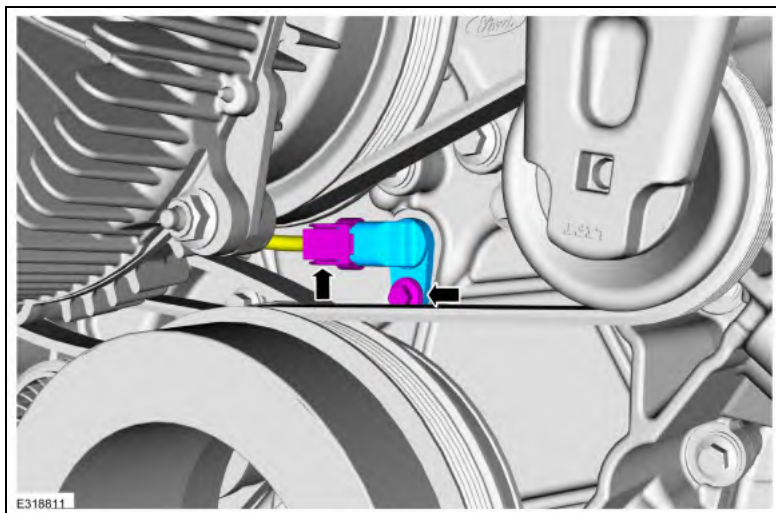

Installation

NOTE: Before installation, lubricate the CMP sensor O-ring seal with clean engine oil.

1. To install, reverse the removal procedure.