

Special Tool(s) / General Equipment

Removal



1. If equipped, release the clips and remove the instrument panel speaker grille. Use the General Equipment: Interior Trim Remover



- Remove the bolts, release the clips and remove the instrument panel center upper trim panel. Disconnect the electrical connector.
Use the General Equipment: Interior Trim Remover
Torque: 18 lb.in (2 Nm)



3. Disconnect the electrical connector and remove the driver side register air discharge temperature sensor.

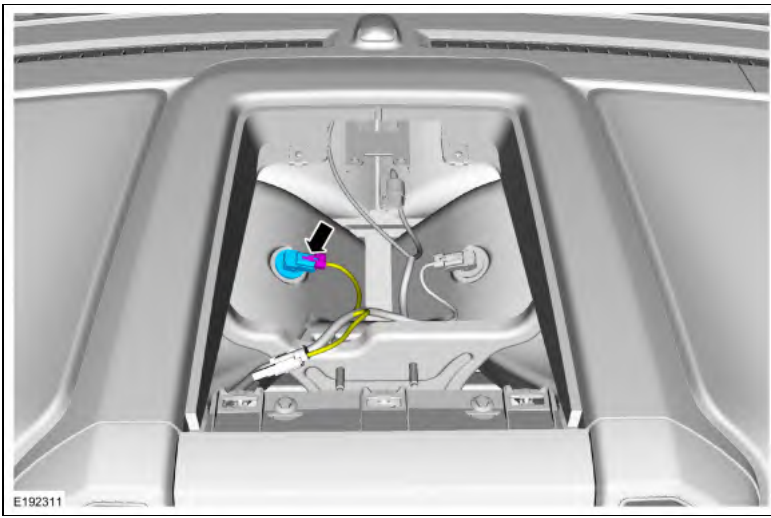

Installation

1. To install, reverse the removal procedure.

mcx30.com