

## Cellular Antenna Cable


### Removal

#### All vehicles

1. Remove the loadspace trim panel.  
Refer to: Loadspace Trim Panel - Regular Cab (501-05 Interior Trim and Ornamentation, Removal and Installation).  
Refer to: Loadspace Trim Panel - Crew Cab/Super Cab (501-05 Interior Trim and Ornamentation, Removal and Installation).
2. Lower the headliner.  
Refer to: Headliner - Lowering - Regular Cab (501-05 Interior Trim and Ornamentation, Removal and Installation).  
Refer to: Headliner - Lowering - Super Cab (501-05 Interior Trim and Ornamentation, Removal and Installation).  
Refer to: Headliner - Lowering - Crew Cab (501-05 Interior Trim and Ornamentation, Removal and Installation).

#### Regular Cab


3. Disconnect the antenna cable connectors, separate the wiring guides and remove the TCU antenna coaxial cable.

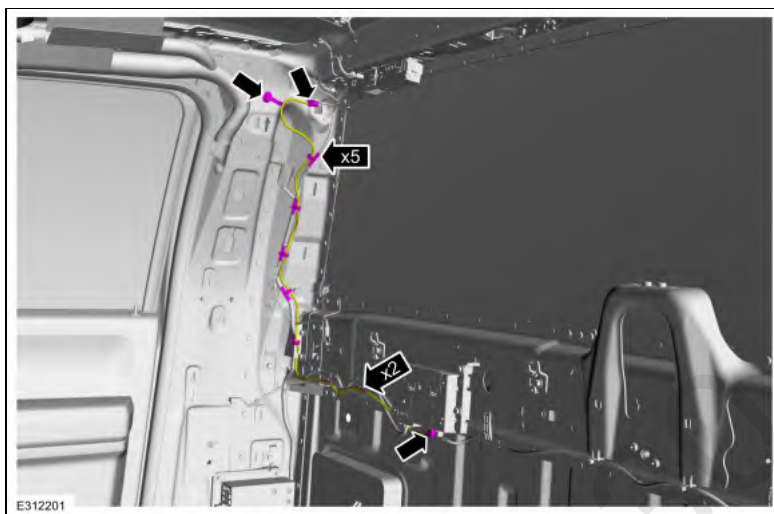

#### Crew Cab/SuperCab

**NOTE:** Super cab is shown, crew cab is similar.

4. Disconnect the antenna cable connectors, separate the wiring guides and remove the TCU antenna coaxial cable.

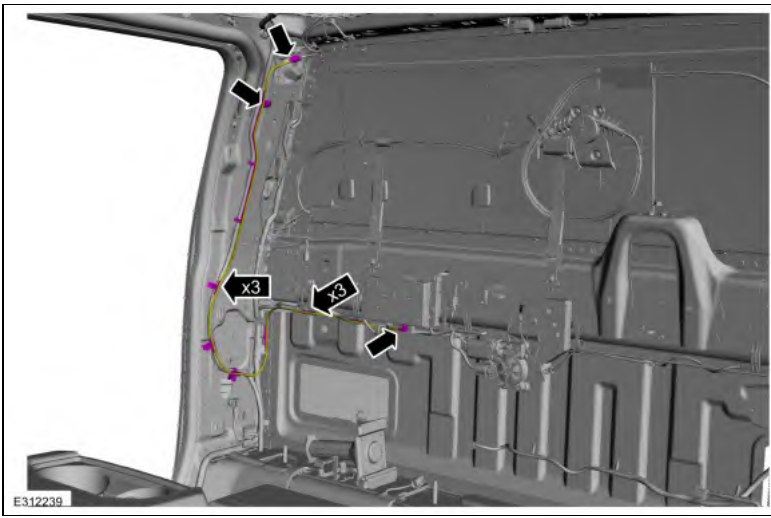

**Installation**

1. To install, reverse the removal procedure.