

Cab Marker Lamp


Removal

NOTE: Removal steps in this procedure may contain installation details.


1. **NOTE:** During installation, do not over tighten the cab marker lamp screw. Damage to the cab marker lamp gasket may cause a leak.

Remove the cab marker lamp screw.


Torque: 12 lb.in (1.3 Nm)

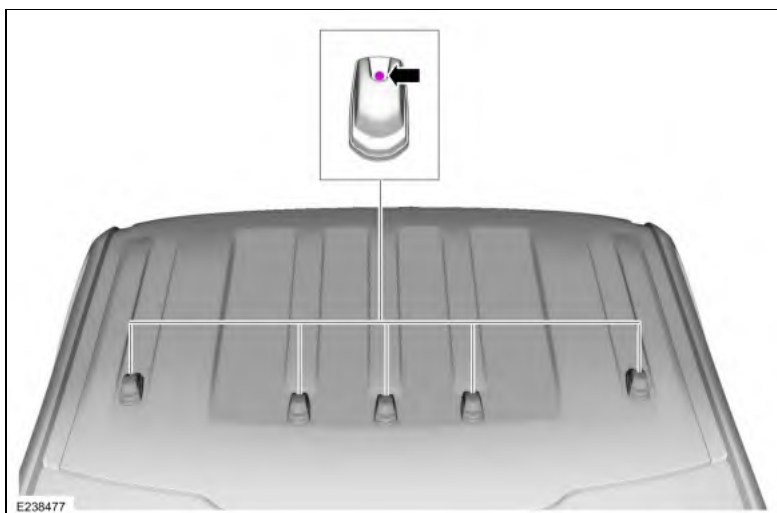

2. Position the cab marker lamp up.
 1. Slide the cab marker lamp rearward.
 2. Lift the front of the marker lamp and position the lamp assembly up.

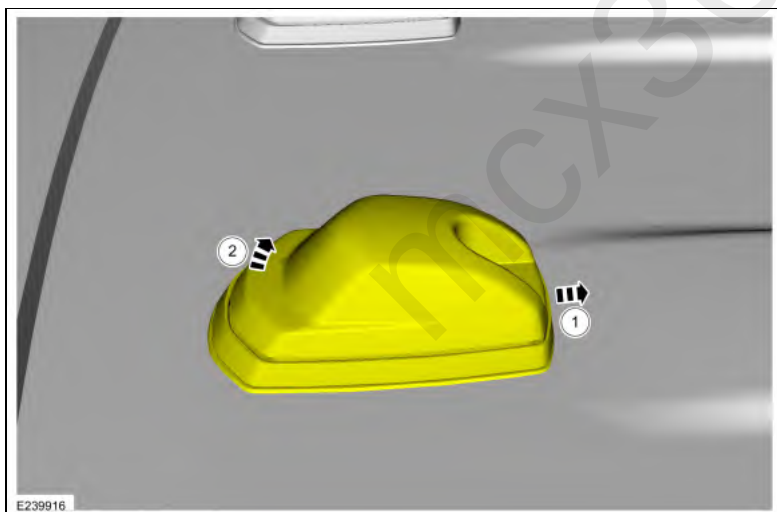

3. Disconnect the electrical connector and remove the cab marker lamp.

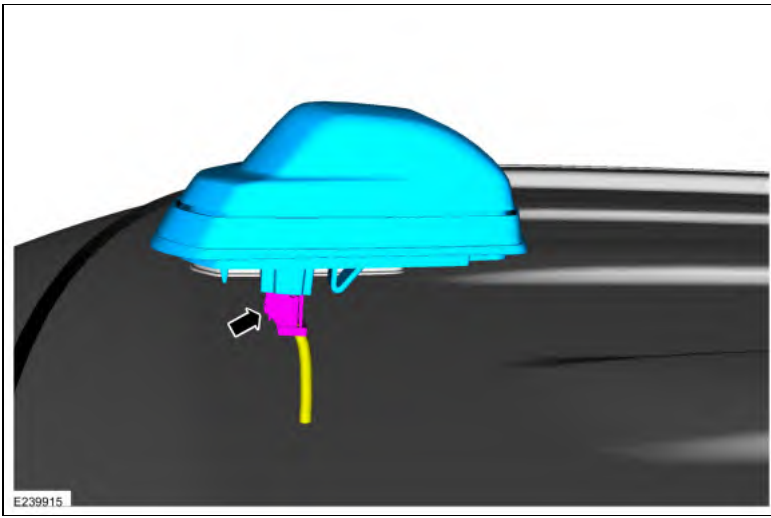

Installation

1. Clean the surface where the new cab marker lamp is to be installed using isopropyl alcohol or equivalent cleaner, allow to flash.
2. To install, reverse the removal procedure.

mcx30.com