


Front Marker Lamp

Removal

1. Remove the headlamp assembly.
Refer to: Headlamp Assembly (417-01 Exterior Lighting, Removal and Installation).
2. Remove the front marker lamp bulb.
 1. Rotate the front marker lamp bulb holder counterclockwise and remove the front marker lamp assembly.
 2. Separate the front marker lamp bulb from the bulb holder.

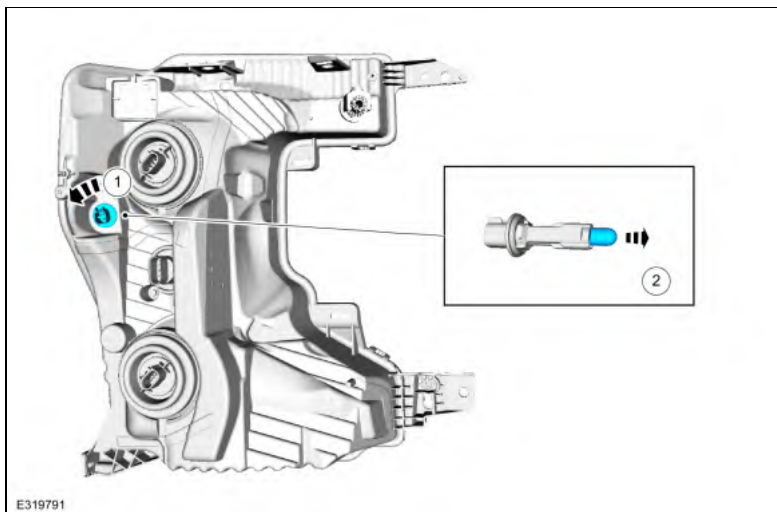

Installation

1. To install, reverse the removal procedure.