


Headlamp Switch

Removal



1. **NOTE:** Push button start vehicle shown, all others similar.
- Lower the steering column opening trim panel.



2. Disconnect the electrical connector and harness retainer.

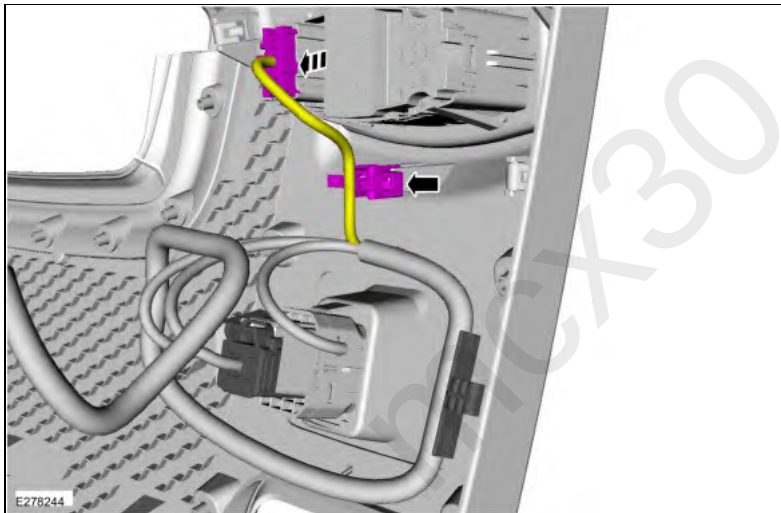

3. Release the tabs and remove the headlamp switch.

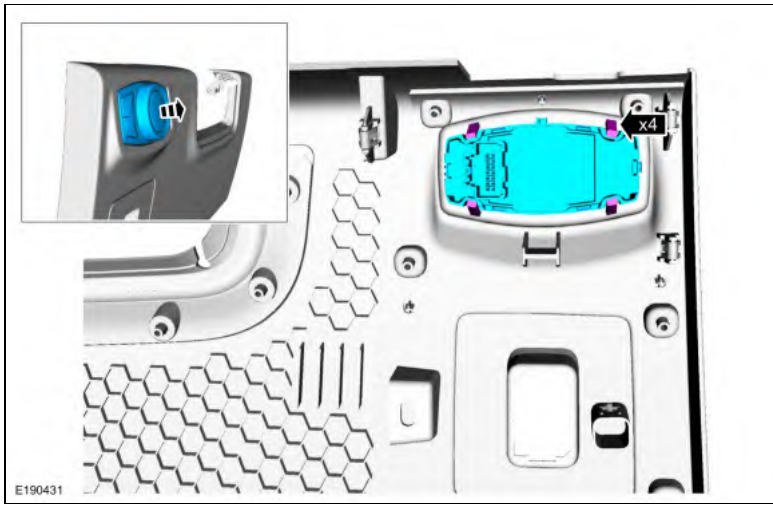

Installation

1. To install, reverse the removal procedure.

mcx30.com