

Removal


1. Remove the push pin, screw and the pin-type retainers, then position the quarter panel liner aside.




2. Remove the side marker lamp.
 1. Disconnect the side marker lamp electrical connector.
 2. Release the locking tab.



3. Remove the push pin and the pin-type retainers, then position the quarter panel liner aside.

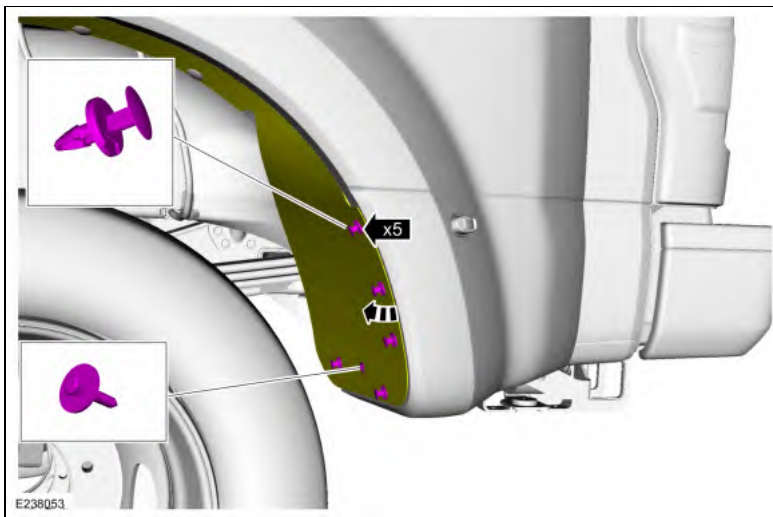

4. Remove the side marker lamp.
1. Disconnect the side marker lamp electrical connector.
 2. Release the locking tab.

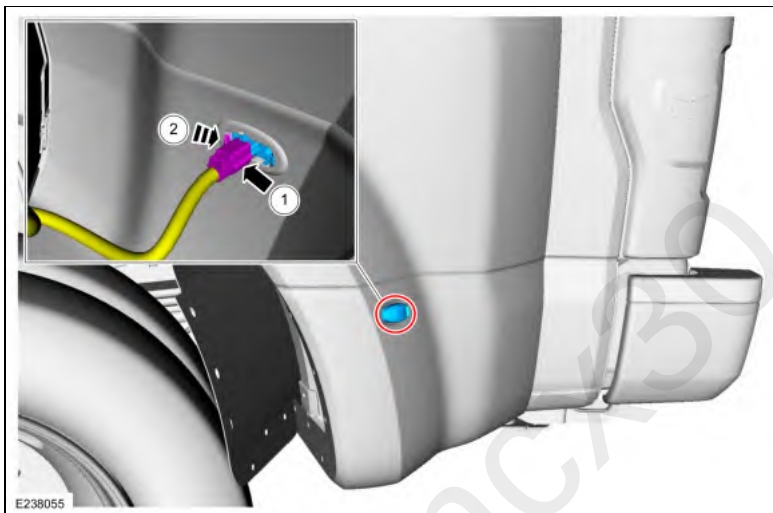

Installation

1. To install, reverse the removal procedure.