


Rear Door Ajar Switch - Super Cab

Removal

1. Remove the rear door trim panel.
Refer to: Rear Door Trim Panel - Super Cab (501-05 Interior Trim and Ornamentation, Removal and Installation).
2. Remove the water shield.



3. Remove the rear door ajar switch.
 1. Disconnect the electrical connector.
 2. Release the tabs.

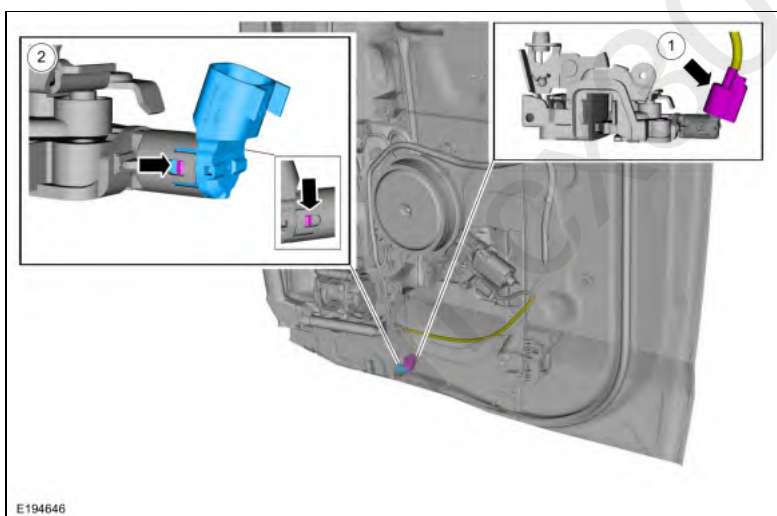

Installation

1. To install, reverse the removal procedure.

