



Passive Anti-Theft System (PATS) Center Antenna - Vehicles With: Center Console

Removal


1. Open the floor console lid.

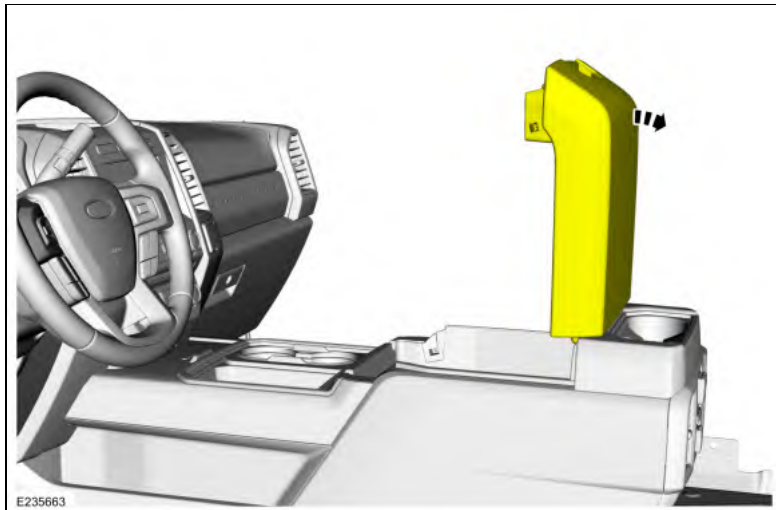


2. Release the floor console upper trim panel clips.

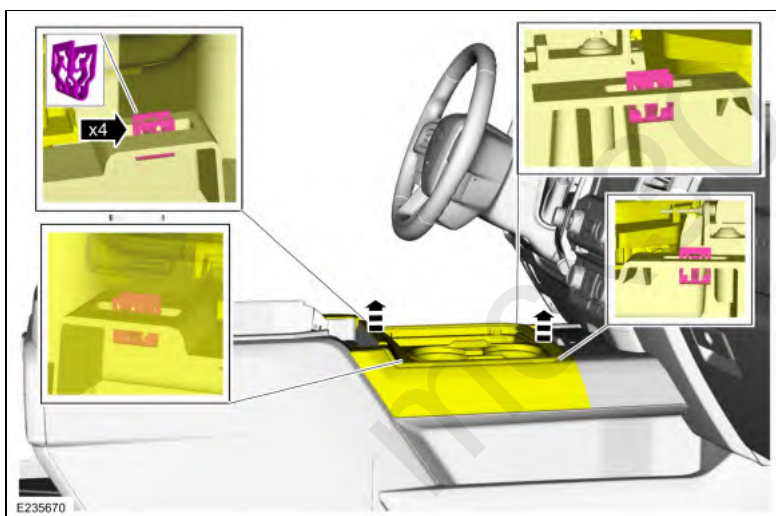

3. Remove the floor console upper trim panel.
 1. Release the trim panel front clips.
 2. Disconnect the center PATS antenna electrical connector.

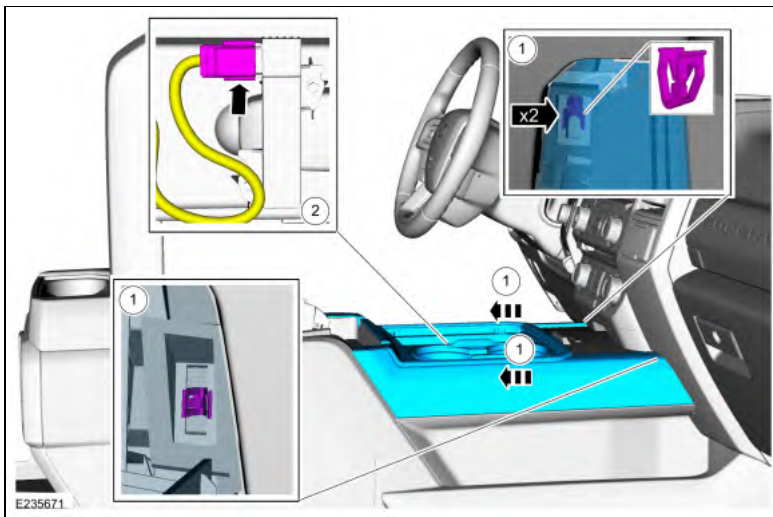

4. Remove the bolts and the center PATS antenna.

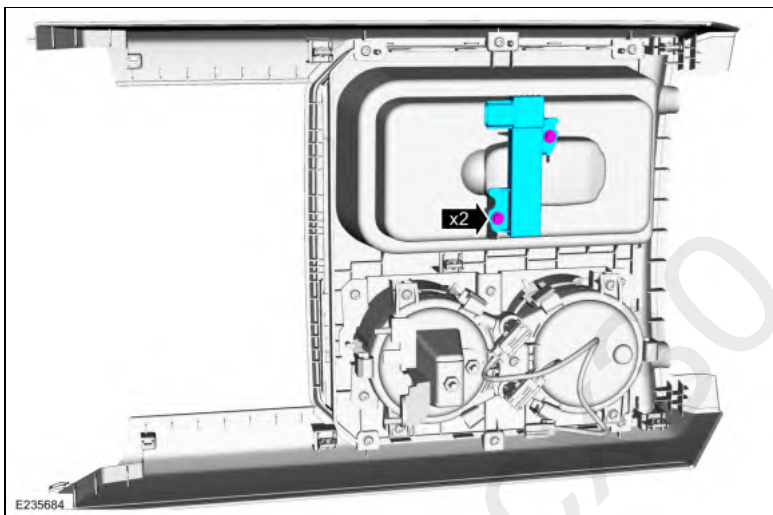

Installation

1. To install, reverse the removal procedure.