


Fender

Removal


NOTE: LH side shown, RH side similar.

NOTE: Wheels remove for clarity.

- 1. Remove the retainers and fender splash shield.

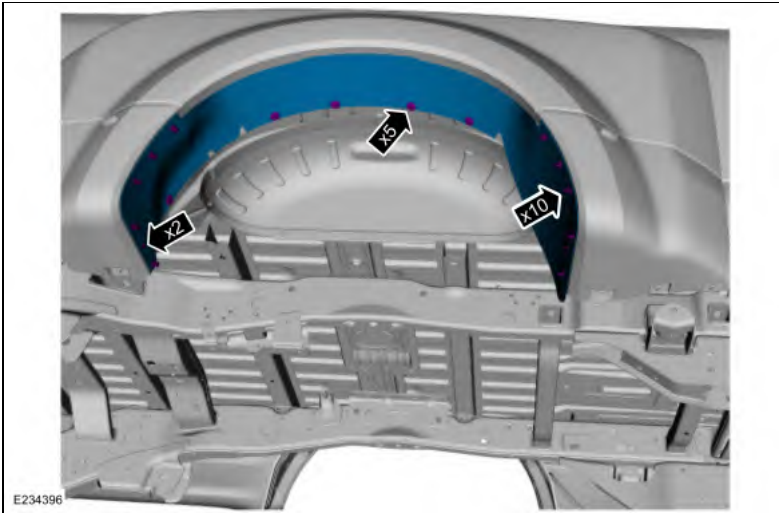


- 2. Disconnect the marker light connectors and position aside the wiring harness.

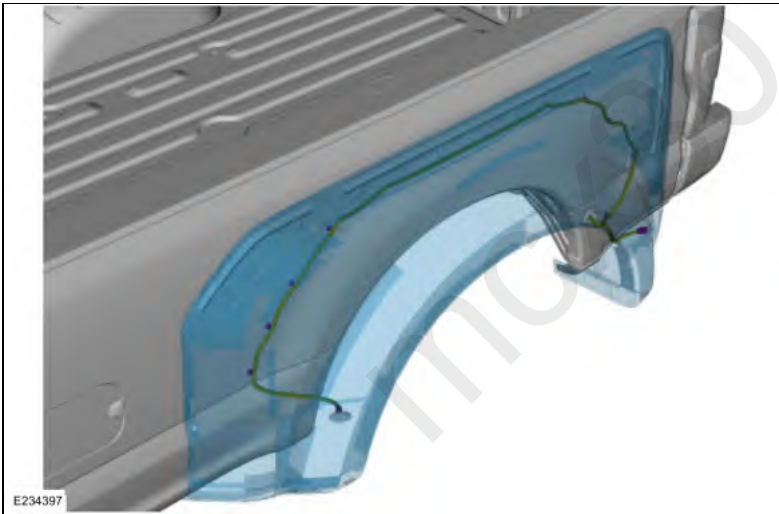


- 3. NOTE: Pay particular attention to fastener locations to aid in installation.


Remove the lower fender fasteners.

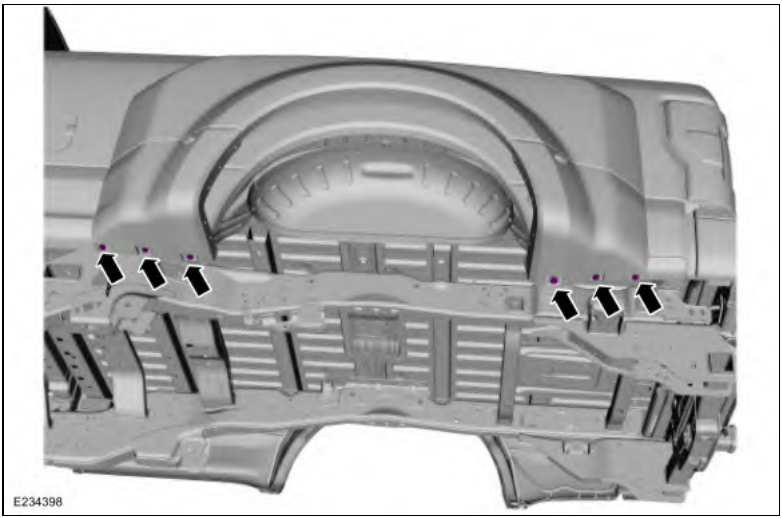


4. Remove the fender bracket bolts and push pins.

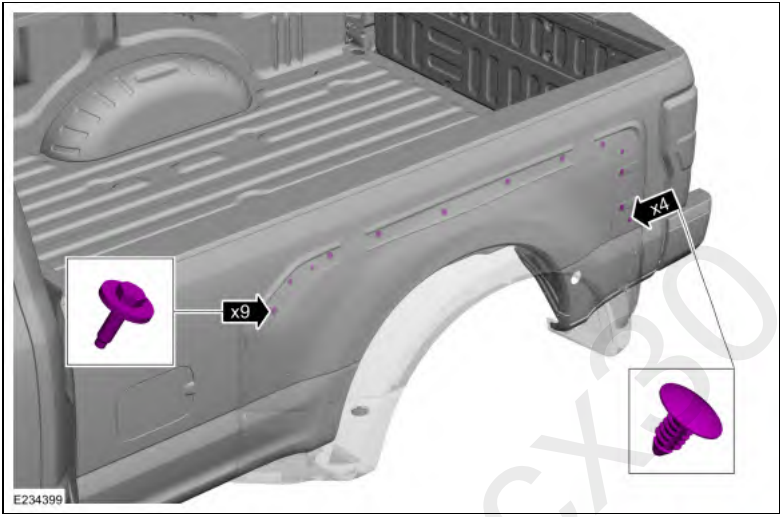

5. Remove the nuts from the back side of the pickup box panel and remove the retainer clips.

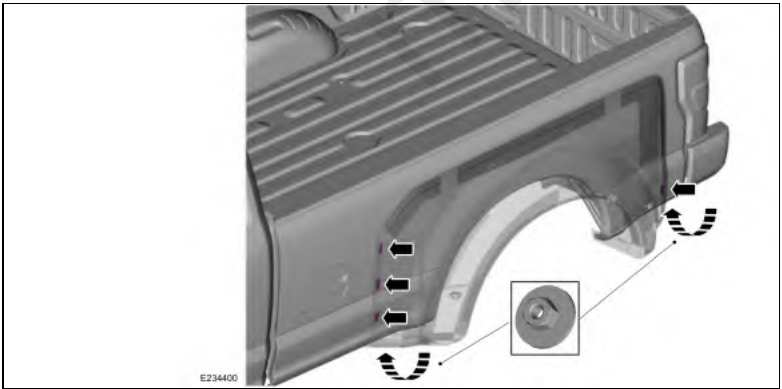



6. Remove the pushpin retainers and the fender.

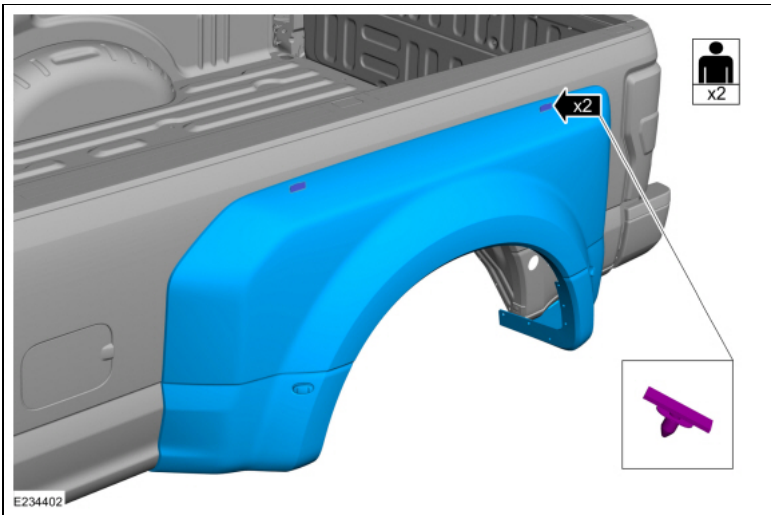


Installation

NOTE: LH side shown, RH side similar.


1. Using the fender locator pins to position, install the fender and the pushpin retainers.

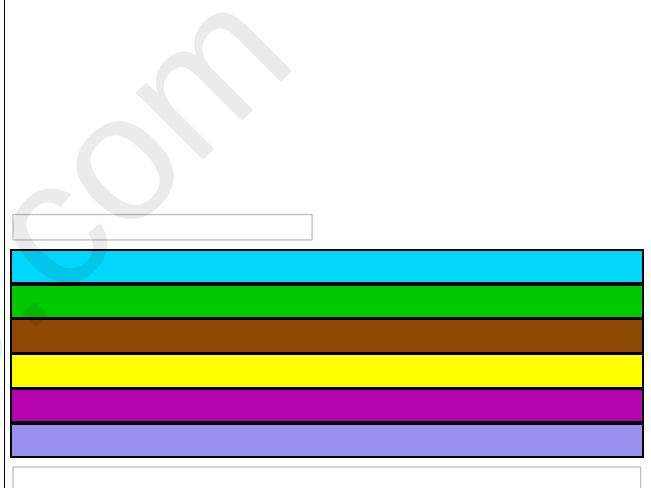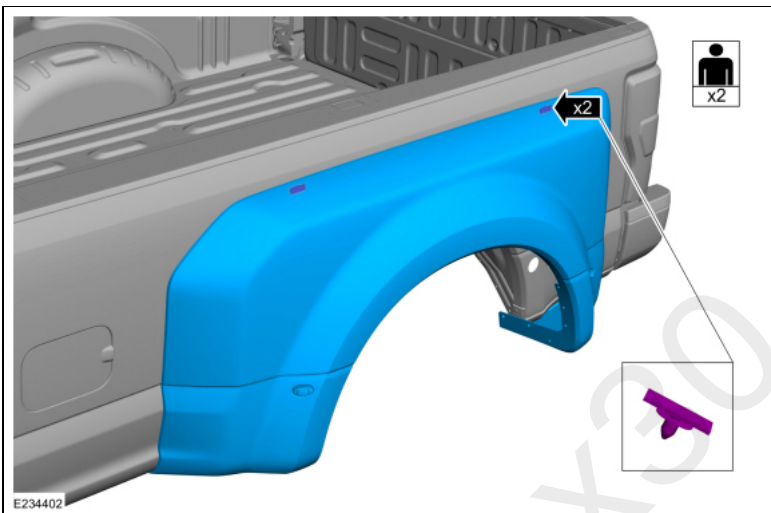


2. Install the retainer clips and from back side of the pickup box panel, install the nuts.
Torque: 80 lb.in (9 Nm)

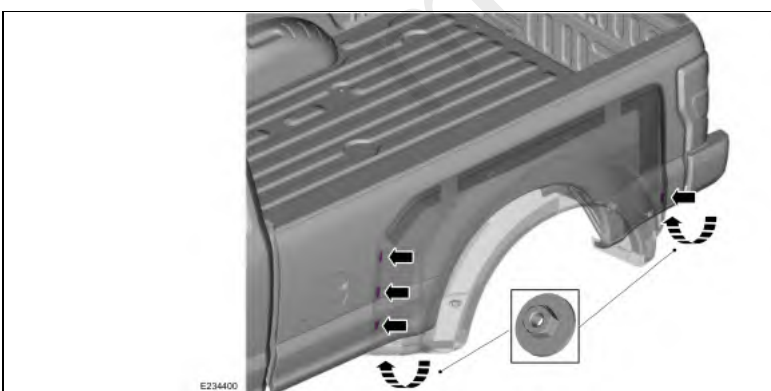


3. Install the fender brackets bolts and push pins.
Torque: 80 lb.in (9 Nm)

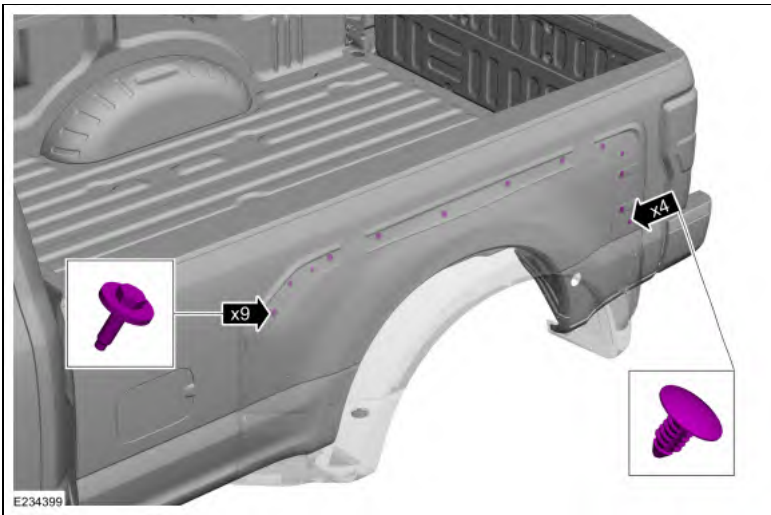


4. Install the lower fender fasteners.
Torque: 80 lb.in (9 Nm)

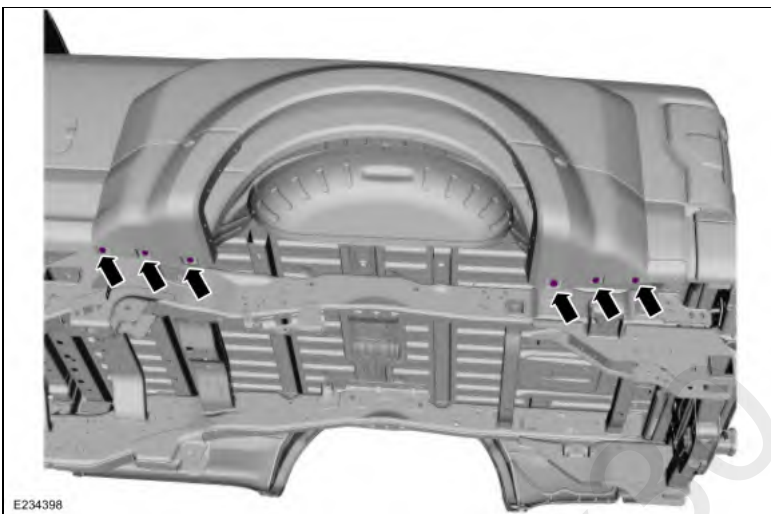

5. Reposition and install the wiring harness retainers and connect the marker lights.

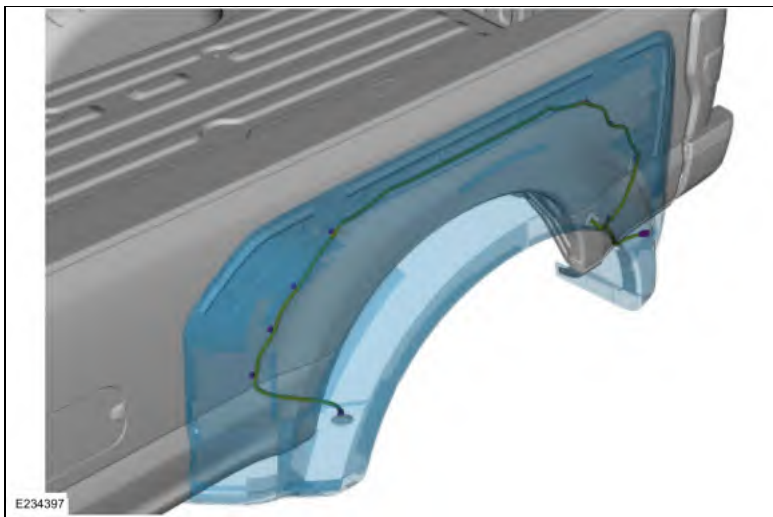

6. Install the fender splash shield and retainers.

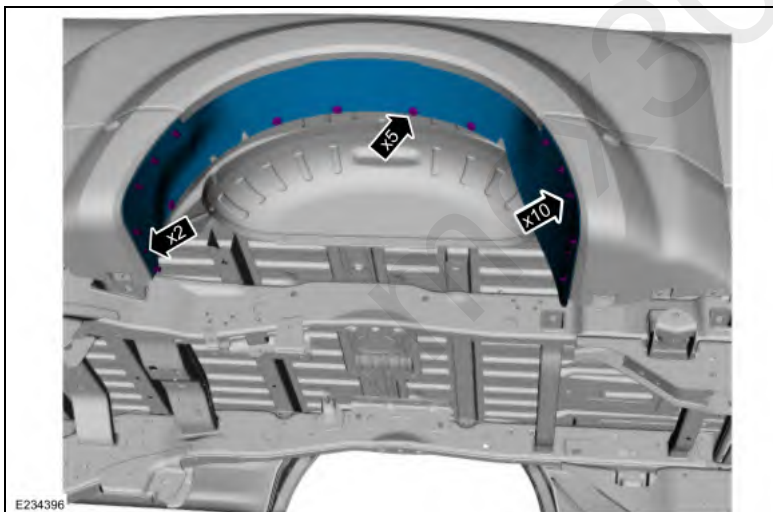

7. Check the lighting for normal operation.

