

B-Pillar Trim Panel - Regular Cab


Removal

NOTE: RH side shown, LH side similar.

NOTE: Removal steps in this procedure may contain installation details.


Upper and Lower B-Pillar Trim Panels

- 1. Position the seat and the backrest fully forward.

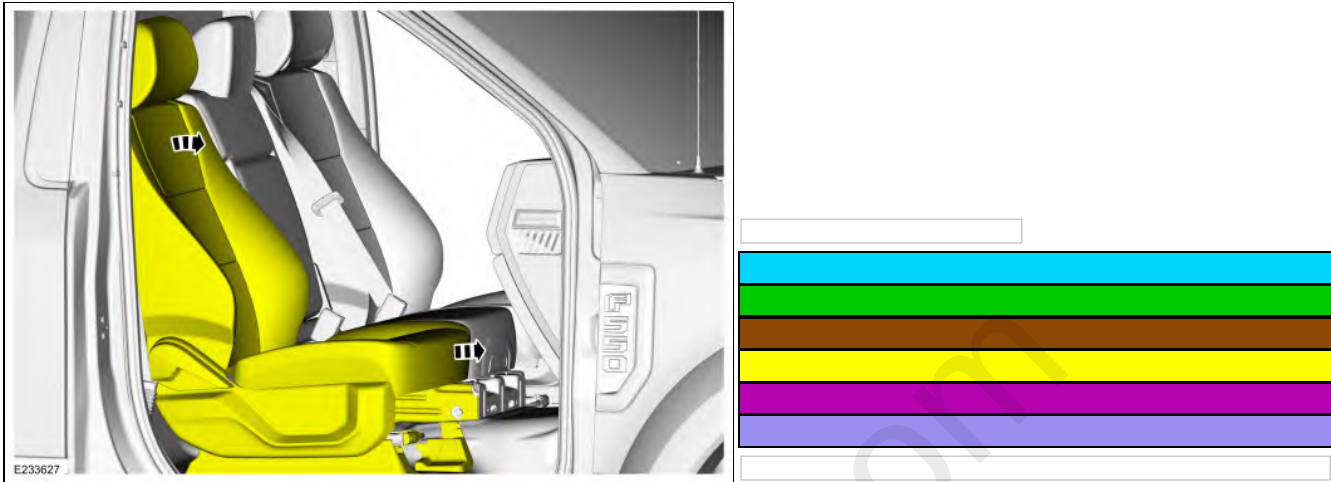


- 2. NOTE: During installation, attach the scuffplate trim panel to the lower B-pillar trim panel first.


Release the clips and remove the scuffplate trim panel.

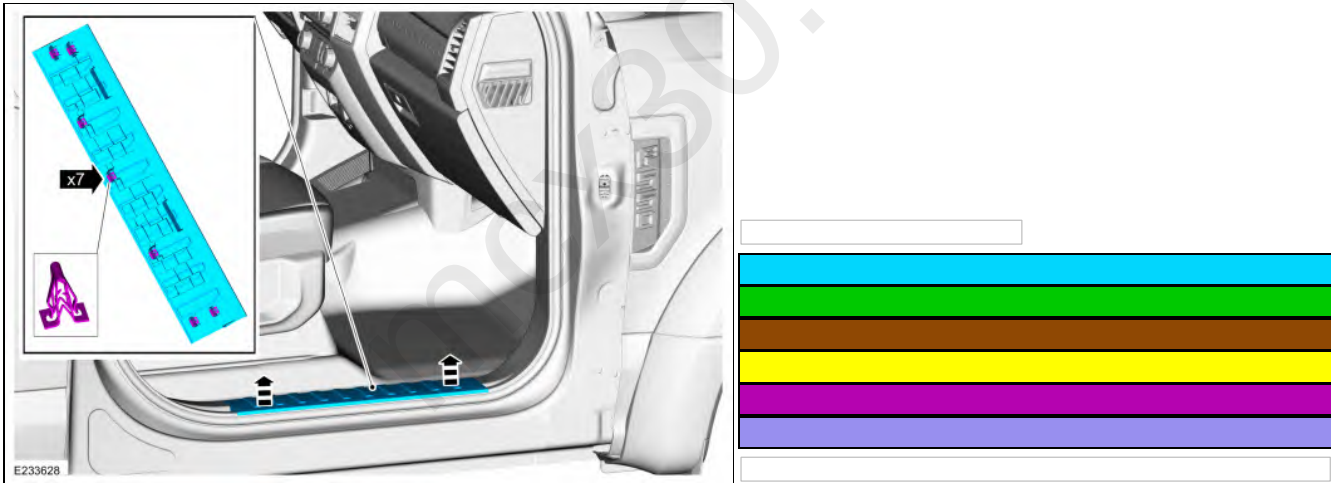


- 3. Position the weatherstrip aside.

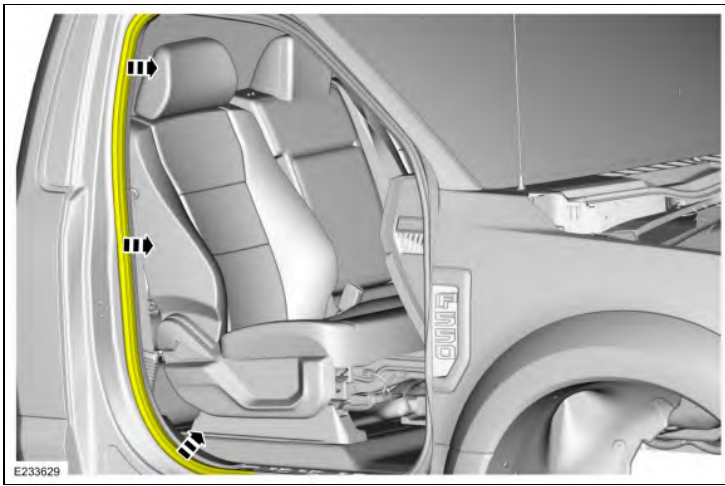


4. Disengage the seatbelt pretensioner boot from the pretensioner bezel.

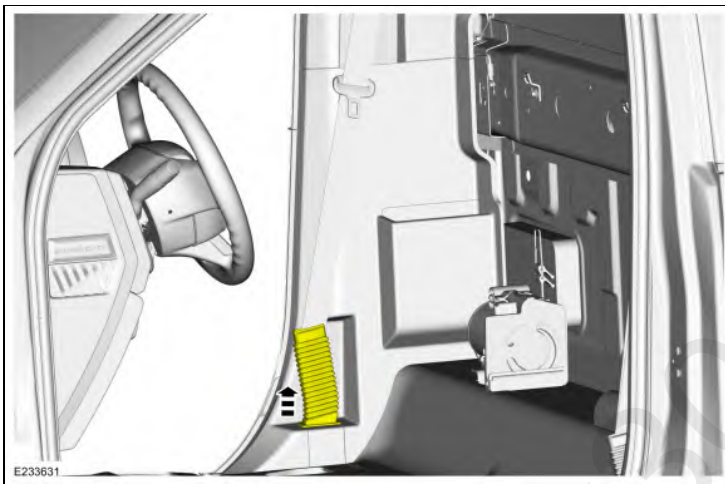

5. Remove the pretensioner bezel.

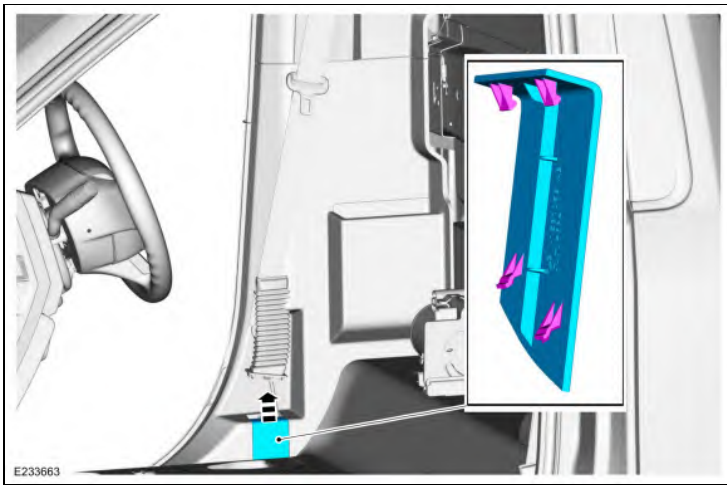

6. Release the clips and remove the B-pillar lower trim panel.

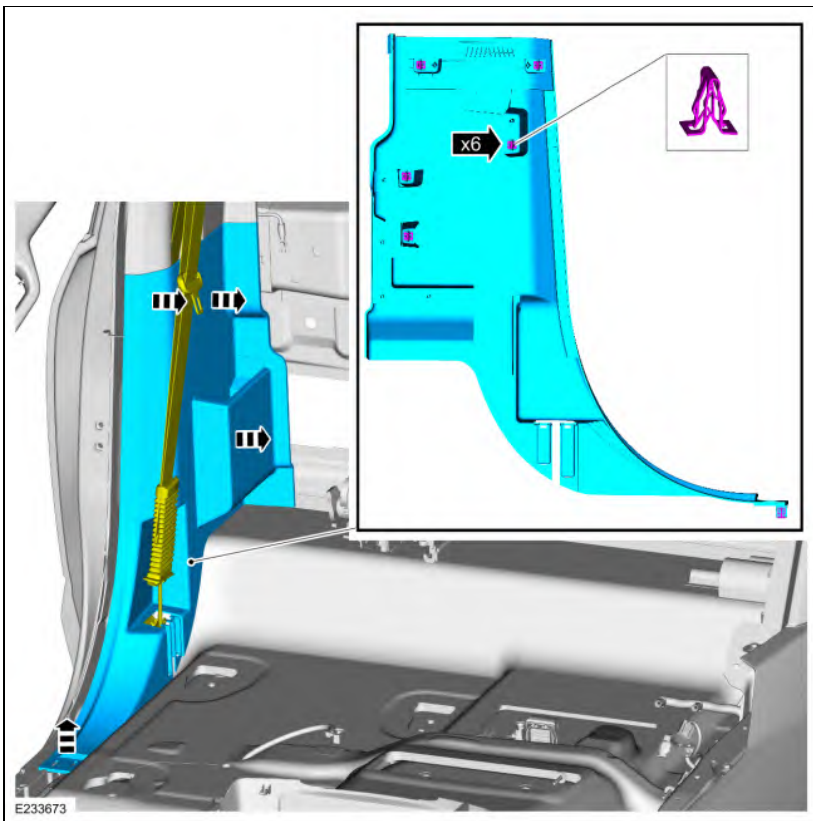

mcx30.com



Upper B-Pillar Trim Panel

7. Remove the D-ring bolt cover.




A horizontal bar chart consisting of six stacked rectangular segments of equal width. From top to bottom, the colors are cyan, green, brown, yellow, purple, and light blue. Each segment is outlined in black. The chart is positioned below a text input field and above another one.




9. Release the clips.



10. **NOTICE:** The trim panel must be positioned upward to allow the upper clip to release correctly. Failure to follow this may cause damage to the trim panel.
- Slide the trim panel upward, aligning the clips to the slots in the sheet metal.

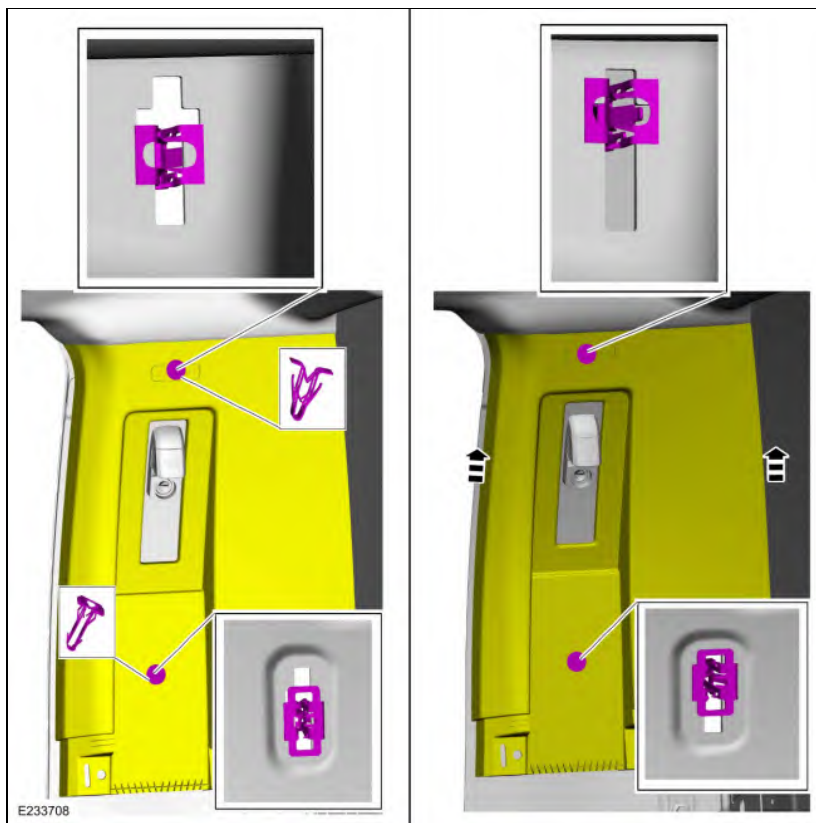

11. Remove the upper B-pillar trim panel.

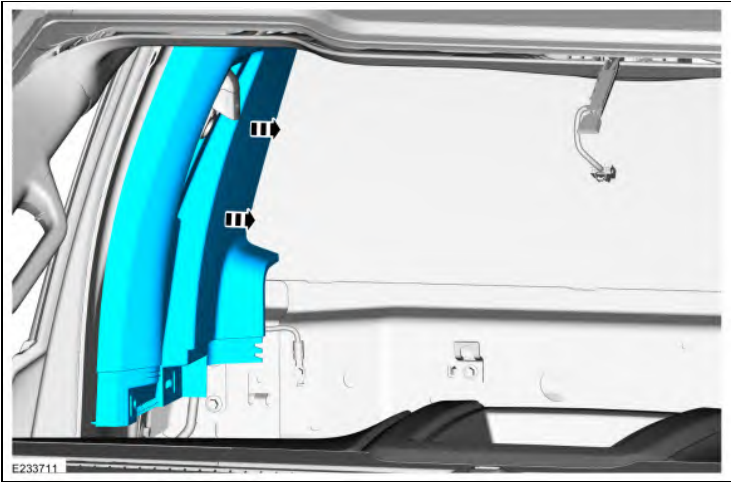

Installation

1. **NOTE:** During installation, make sure the seatbelt webbing is not twisted and the seatbelts and buckles are accessible to the occupants.
To install, reverse the removal procedure.

mcx30.com