


B-Pillar Trim Panel - Super Cab

Removal


NOTE: LH side shown, RH side similar.

NOTE: Removal steps in this procedure may contain installation details.

1. Release the clips and remove the scuffplate trim panel.

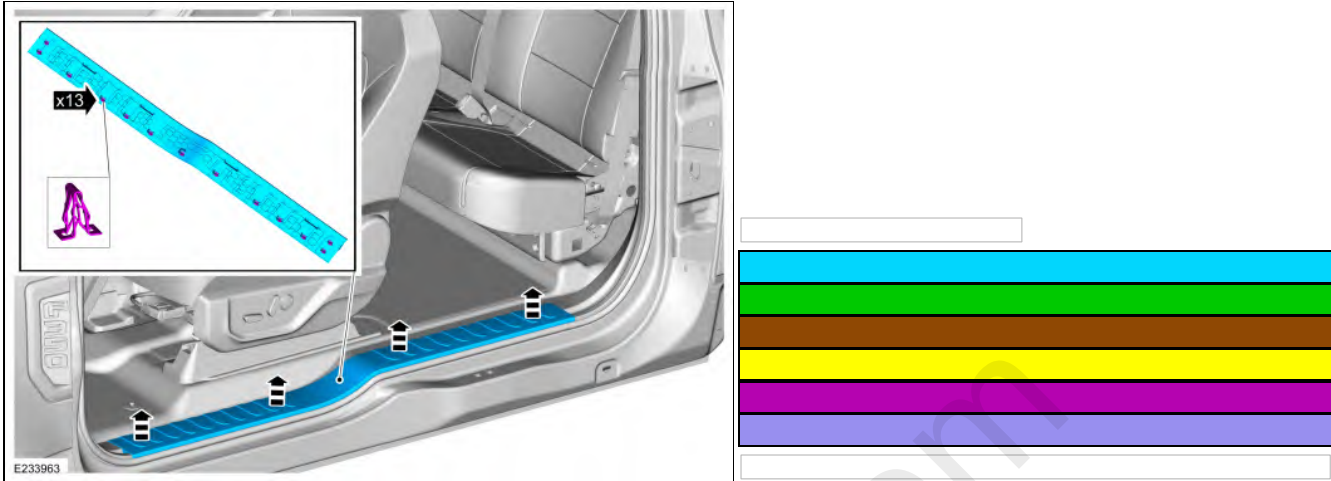

2. Position the rear door weatherstrip aside.

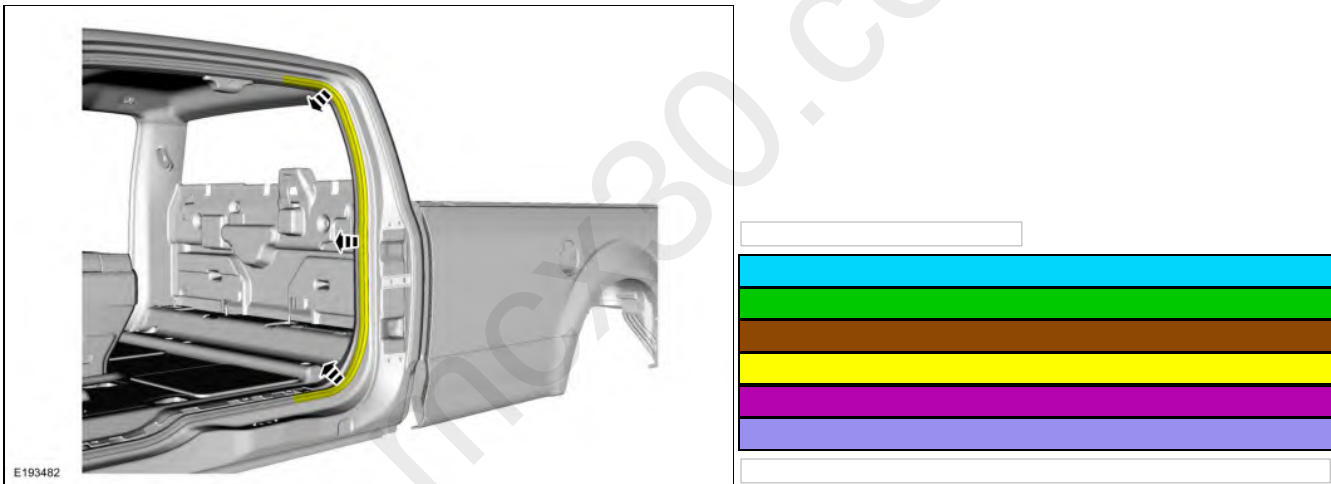

3. Remove the bolt and position the seatbelt aside.
- Torque: 30 lb.ft (40 Nm)




4. **NOTE:** If the tether clip is damaged during removal, a new clip must be installed prior to installation of the trim panel.


NOTE: During installation, install the clip by the scuffplate trim panel first and work upward on the trim panel to connect the other clips.

Remove the B-pillar trim panel.

1. Release the clips.
2. Release the tether clip from the trim panel.

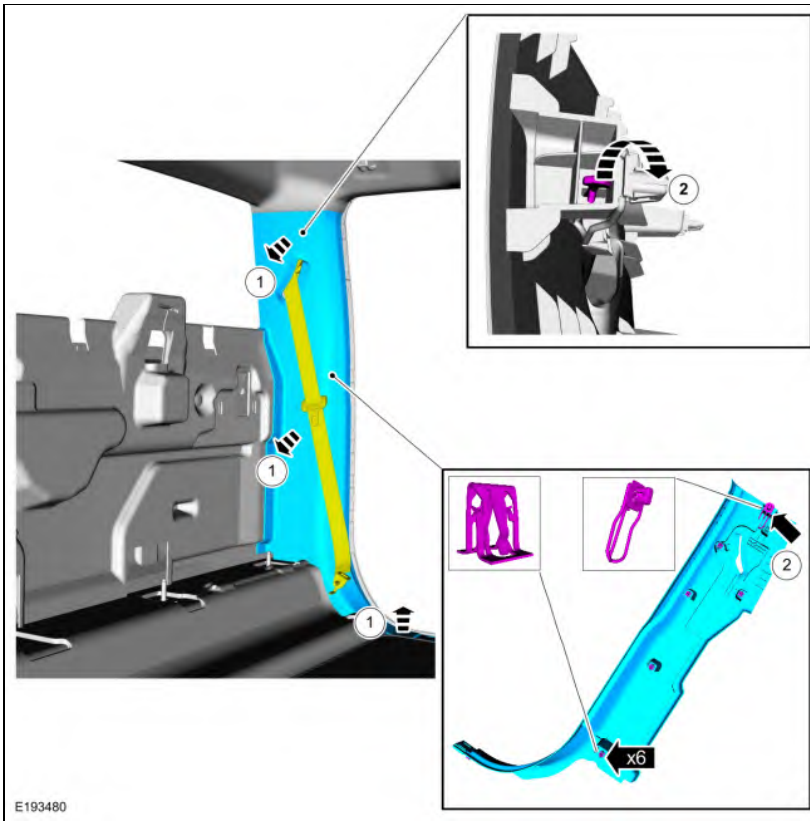

mcx30.com



Installation

1. **NOTE:** During installation, make sure the seatbelt webbing is not twisted and the seatbelts and buckles are accessible to the occupants.

To install, reverse the removal procedure.

