



Rear Door Trim Panel - Crew Cab

Removal


1. Release the clips and remove the door handle trim cover.

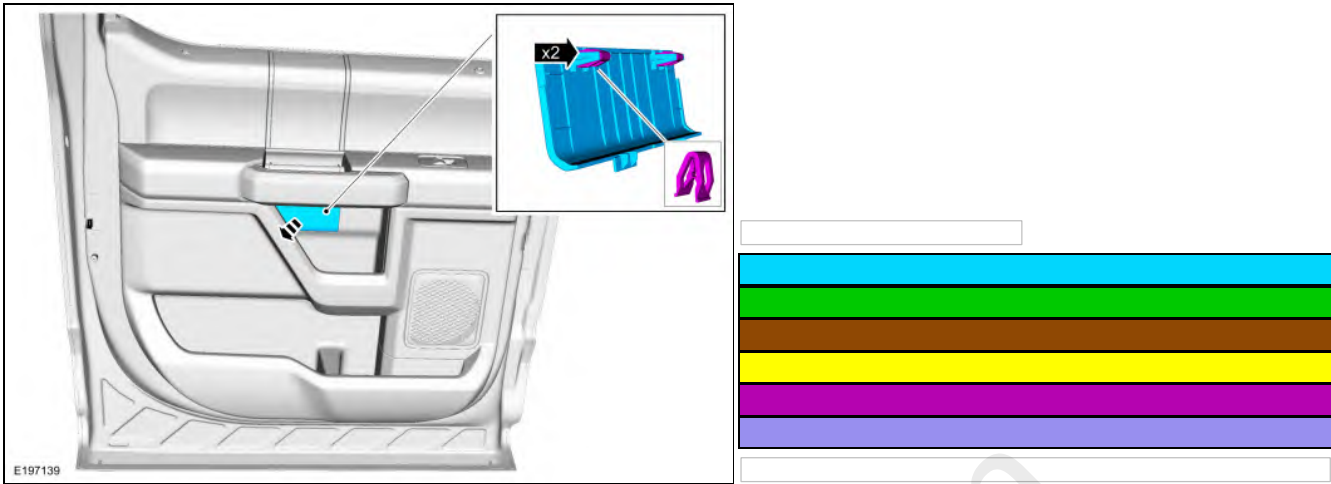


2. Remove the retainers.

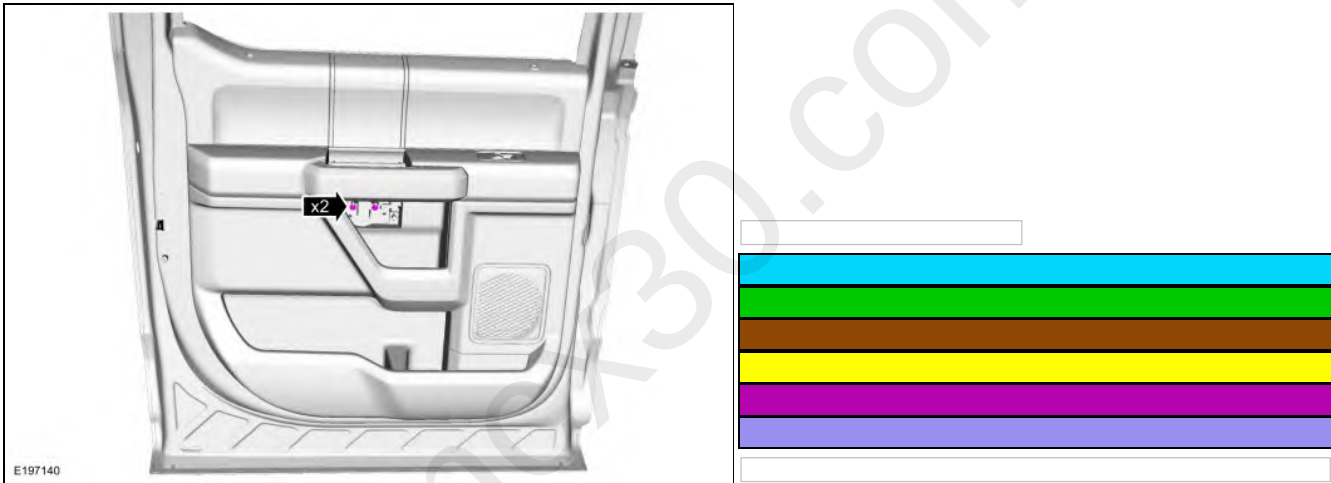



3. Release the clips and remove the door grab handle.

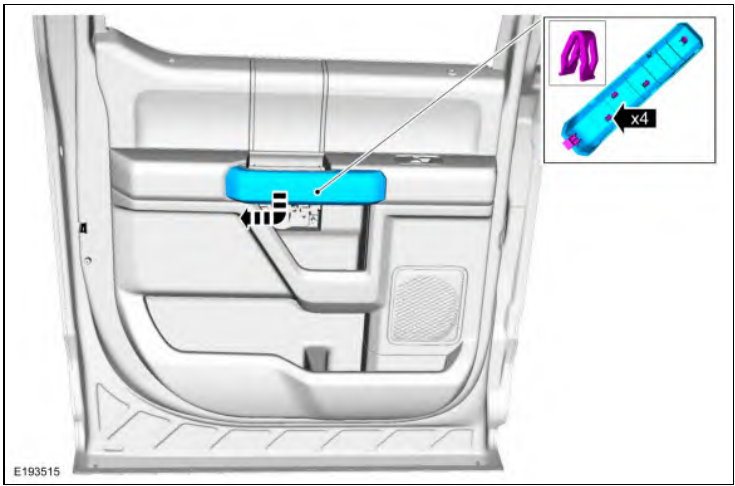

4. Remove the door trim panel bolts.

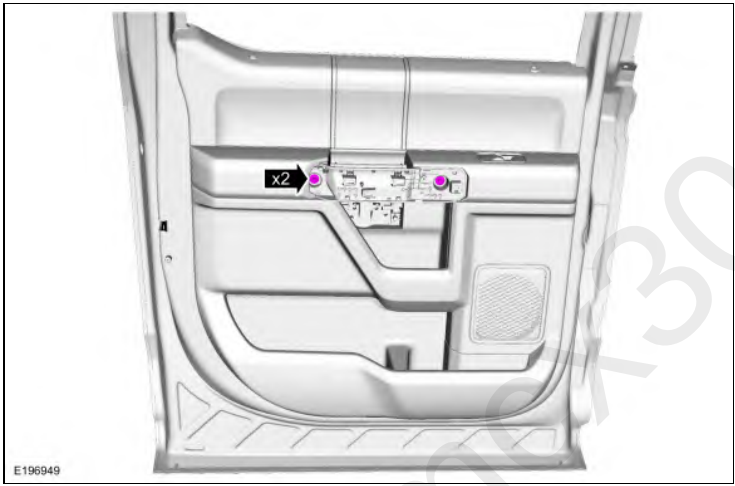

5. Remove the rear door trim panel lower retainers.


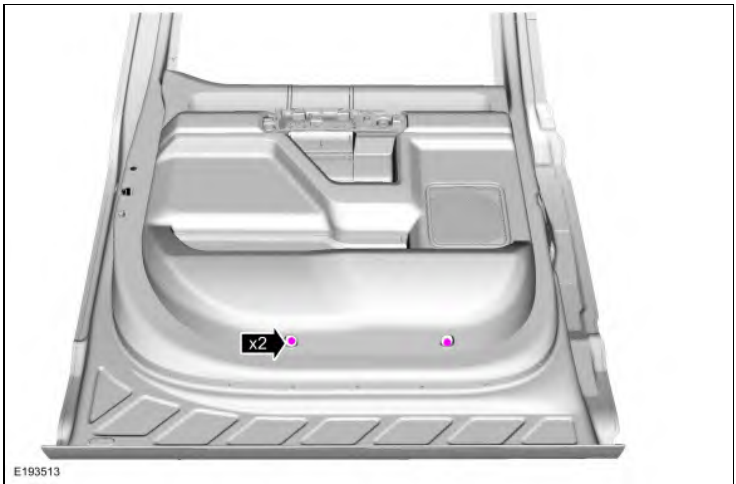


Vehicles With Manual Rear Windows

NOTE: LH side shown, RH side similar.


- 6. Remove the window regulator handle.
 - 1. Position aside the cover.
 - 2. Remove the retainer and the window regulator handle.

Torque: 33 lb.in (3.7 Nm)

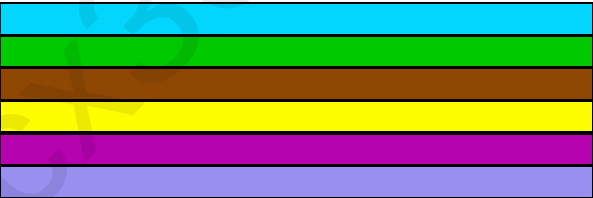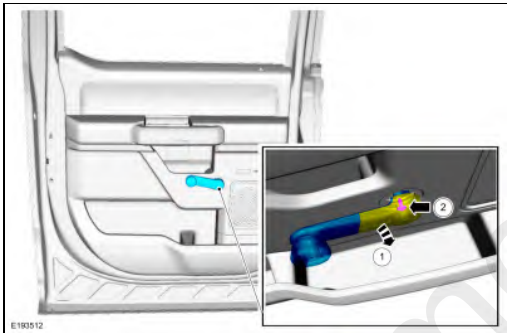

All vehicles


- 7. Release the rear door trim panel clips.

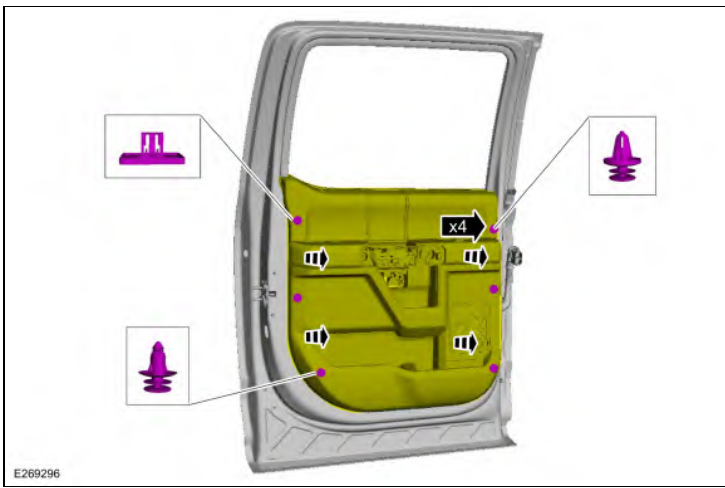

8. Remove the rear door trim panel.

1. Lift upward and outward on the rear door trim panel.
2. Release the tab and disconnect the interior rear door handle cable.
3. If equipped, disconnect the rear door window control switch.

mcx30.com

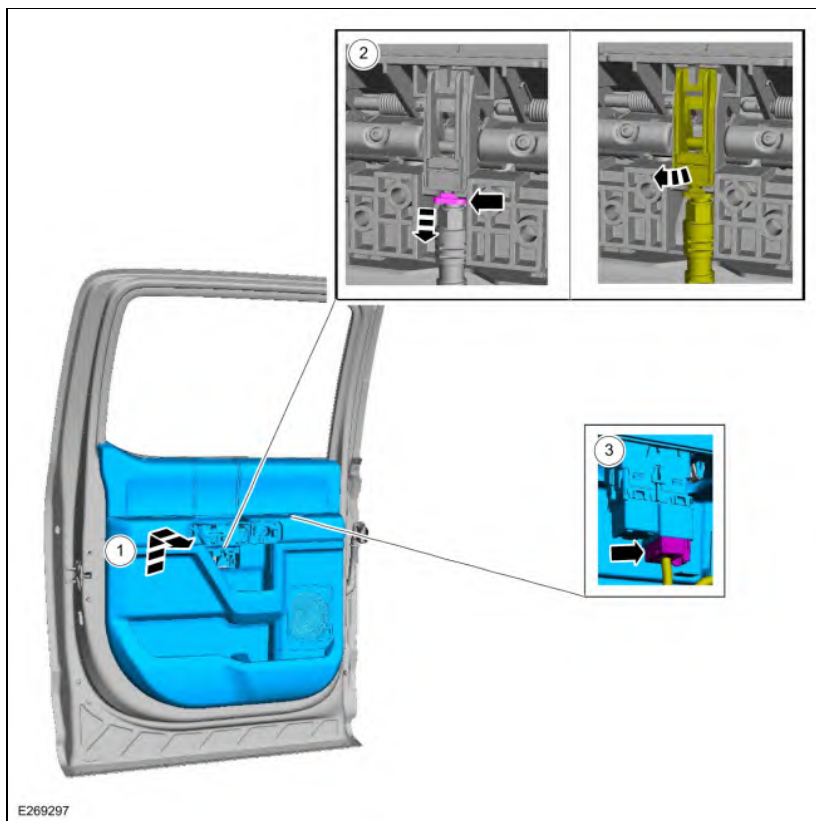

E269297

mcx30.com



Installation

1. To install, reverse the removal procedure.

