


Front Fender Moulding - F-450/F-550


Removal

NOTE: Removal steps in this procedure may contain installation details.

1.

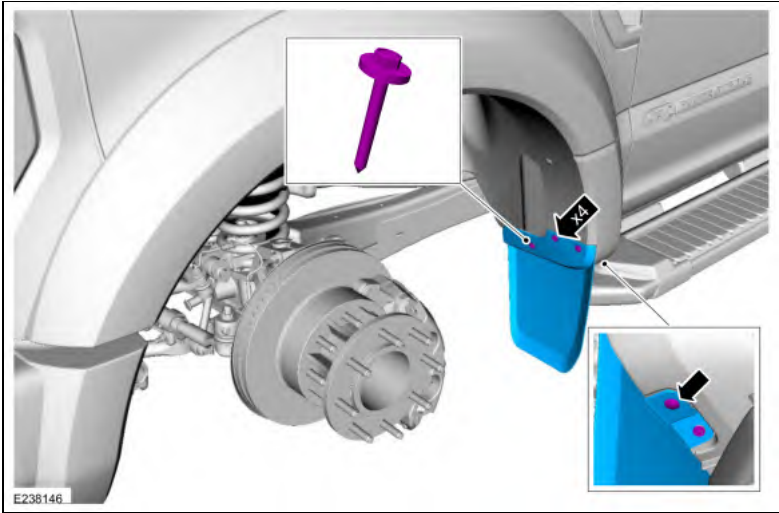


2. Remove the push pins and the retainer.

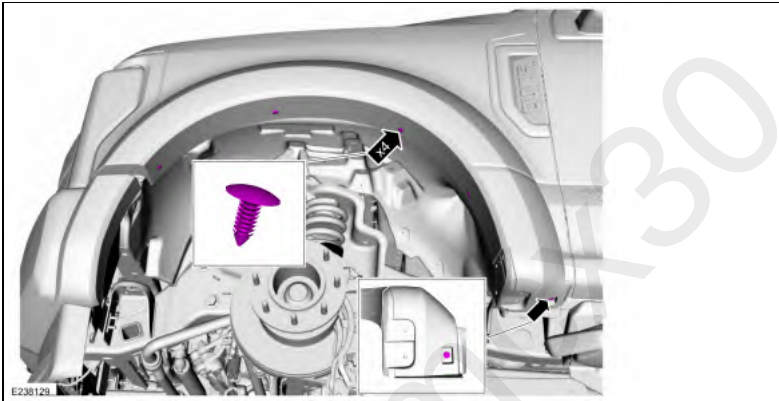

3. NOTE: Moulding attaches to 2 inner panels which are held on to the fender with the pushpin clips. When servicing the moulding assembly the inner panels are removed from the fender.

Using a non-marring trim tool, disengage the trim clips and remove the front fender moulding.

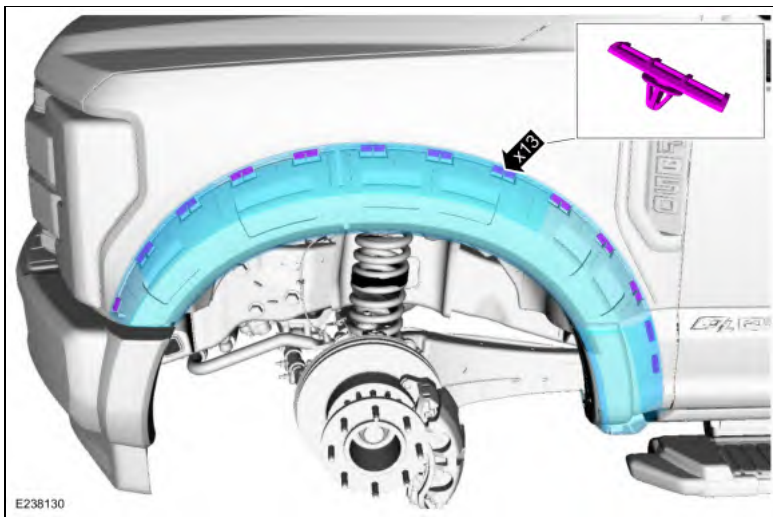

Installation

1. To install, reverse the removal procedure.

mcx30.com